

Multi model
application
Technical data book
5MXM-N9



5MXM90N2V1B9

Table of contents

5MXM-N9

1	Features	4
	5MXM-N9	4
2	Specifications	5
3	Electrical data	7
4	Combination table	8
5	Capacity tables	31
	Capacity Table Legend	31
6	Dimensional drawings	32
7	Centre of gravity	33
8	Piping diagrams	34
9	Wiring diagrams	35
	Wiring Diagrams - Single Phase	35
10	Sound data	36
	Sound Pressure Spectrum	36
11	Operation range	37

1 Features

1 - 1 5MXM-N9

- › Seasonal efficiency values up to A+++ in cooling and A++ in heating thanks to its up-to-date technology and built-in intelligence
- › Up to 5 indoor units can be connected to 1 multi outdoor unit; all indoor units are individually controllable and do not need to be installed in the same room or at the same time. They operate simultaneously within the same heating or cooling mode.
- › Choosing for an R-32 product, reduces the environmental impact with 68% compared to R-410A and leads directly to lower energy consumption thanks to its high energy efficiency
- › Different types of indoor units can be connected: e.g. wall mounted, ceiling mounted cassette corner, concealed ceiling unit
- › Outdoor units are fitted with a swing compressor, renowned for its low noise and high energy efficiency



Inverter

2 Specifications

1 - 1 5MXM-N9

Technical specifications					5MXM90N9	
Casing	Colour				Ivory white	
Dimensions	Unit	Height	mm		734	
		Width	mm		958	
		Depth	mm		340	
	Packed unit	Height	mm		820	
		Width	mm		1,050	
		Depth	mm		480	
Weight	Unit	kg			68.0	
	Packed unit	kg			72	
Heat exchanger	Length	mm			920	
	Rows	Quantity			2	
	Fin pitch	mm			1.40	
	Stages	Quantity			32	
	Passes	Quantity			6	
	Tube type				Hi-XA	
	Tube diameter	mm			7	
	Fin	Type			WHS8 FIN-HYDROPHILIC	
		Treatment			Anti-corrosion treatment	
Heat exchanger 2	Length	mm			650	
	Rows	Quantity			1	
	Fin pitch	mm			1.80	
	Stages	Quantity			12	
Fan	Type				Propeller	
	Air flow rate	Cooling	High	m³/min	49.1	
				cfm	1,734	
			Nom.	m³/min	49.1	
				cfm	1,734	
			Silent operation	m³/min	24.1	
				cfm	851	
		Heating	High	m³/min	50.4	
				cfm	1,780	
			Nom.	m³/min	50.4	
				cfm	1,780	
			Silent operation	m³/min	24.1	
				cfm	851	
	Fan motor	Output	W			128
Speed		Cooling	High	rpm	800	
			Medium	rpm	800	
			Low	rpm	420	
		Heating	High	rpm	820	
			Low	rpm	420	
			Medium	rpm	820	
Compressor		Quantity				1
	Model				2YC71DXD#C	
	Oil Amount	cm³			900	
	Type				Hermetically sealed swing compressor	
	Output	W			2,400	
	Oil Type				FW68DA	
Operation range	Cooling	Ambient	Min.	°CDB	-10	
			Max.	°CDB	46	
	Heating	Ambient	Min.	°CDB	-15	
			Max.	°CDB	24	
Sound power level	Cooling	dBA			64.0	
	Heating	dBA			64.0	
Sound pressure level	Cooling	Nom.	dBA		52.0	
	Heating	Nom.	dBA		52.0	
Refrigerant	Type				R-32	
	Charge	kg			2.40	
	Charge	TCO2Eq			1.62	
	GWP				675.0	

2 Specifications

1 - 1 5MXM-N9

2

Technical specifications				5MXM90N9
Piping connections	Liquid	Quantity		5
		OD	mm	6.4
	Gas	Quantity		5
		OD	mm	9.50
	Drain	Quantity		1
		OD	mm	16
	Gas 2	Quantity		1
		OD	mm	12.70
	Gas 3	Quantity		2
		OD	mm	15.90
	Piping length	OU - IU Min.	m	3 (1)
		Max.	m	25 (1)
		System Chargeless	m	30
	Additional refrigerant charge			0.02 (for piping length exceeding 30m)
Level difference	IU - OU	Max.	m	15.0
	IU - IU		m	7.5
	Total piping length	System Actual	m	75
Capacity control	Method			Variable (inverter)

Standard accessories: Installation manual; Quantity: 1;

Standard accessories: Screw bag; Quantity: 1;

Standard accessories: Drain plug; Quantity: 1;

Standard accessories: Reducer assembly; Quantity: 1;

Standard accessories: Drain cap (1); Quantity: 6;

Standard accessories: Drain cap (2); Quantity: 3;

Electrical specifications				5MXM90N9
Power supply	Phase			1~
	Frequency		Hz	50
	Voltage		V	220-240
Wiring connections	For power supply	Quantity		3
		Remark		Earth wire included
	For connection with indoor	Quantity		4
		Remark		Earth wire included

(1)For one room |

See separate drawing for operation range |

See separate drawing for electrical data |

Contains fluorinated greenhouse gases

3 Electrical data

3 - 1 Electrical Data

2MXM68N / 3MXM-N9 / 3AMXM-N9 / 3AMXF-A9 / 3MXF-A9 / 4MXM-N9 / 5MXM-N9

Outdoor unit	Power supply			·RA· indoor units (·10·% safety factor)		·RA· indoor units (·10·% safety factor)		COMP		OFM	
Model name	Hz	Voltage	Voltage range	MCA	MFA	MCA	MFA	RHz	RLA	kW	FLA
2MXM68N2V1B	50	220	MAX. 50Hz 264V MIN. 50Hz 198V	16,94	20	19,80	20	-	7,8	0,056	0,37
	50	230							7,5		
	50	240							8,7		
3MXM40N2V1B9	50	220	MAX. 50Hz 264V MIN. 50Hz 198V	14,31	16	15,97	16	-	2,9	0,056	0,37
	50	230							3,0		
	50	240							3,1		
3MXM52N2V1B9	50	220	MAX. 50Hz 264V MIN. 50Hz 198V	14,59	20	16,27	20	-	4,5	0,056	0,37
	50	230							4,7		
	50	240							4,9		
3MXM68N2V1B9	50	220	MAX. 50Hz 264V MIN. 50Hz 198V	17,19	20	19,81	20	-	8,0	0,056	0,37
	50	230							8,4		
	50	240							8,7		
4MXM68N2V1B9	50	220	MAX. 50Hz 264V MIN. 50Hz 198V	17,36	20	19,81	20	-	7,0	0,056	0,37
	50	230							7,3		
	50	240							7,6		
4MXM80N2V1B9	50	220	MAX. 50Hz 264V MIN. 50Hz 198V	17,04	25	20,36	25	-	8,5	0,075	0,50
	50	230							8,9		
	50	240							9,3		
5MXM90N2V1B9	50	220	MAX. 50Hz 264V MIN. 50Hz 198V	21,70	32	25,88	32	-	9,2	0,075	0,50
	50	230							9,6		
	50	240							10,0		
3AMXM52N2V1B9	50	220	MAX. 50Hz 264V MIN. 50Hz 198V	18,19	20	16,27	20	-	4,5	0,056	0,37
	50	230							4,7		
	50	240							4,9		
3MXF52A2V1B9	50	220	MAX. 50Hz 264V MIN. 50Hz 198V	14,59	20	16,27	20	-	4,5	0,056	0,37
	50	230							4,7		
	50	240							4,9		
3AMXF52A2V1B9	50	220	MAX. 50Hz 264V MIN. 50Hz 198V	14,59	20	16,27	20	-	4,5	0,056	0,37
	50	230							4,7		
	50	240							4,9		
3MXF68A2V1B9	50	220	MAX. 50Hz 264V MIN. 50Hz 198V	17,19	20	19,81	20	-	8,0	0,056	0,37
	50	230							8,4		
	50	240							8,7		

Notes

- 1) The ·RLA· is based on the following conditions.
Outdoor temperature ·35·°C DB
Indoor temperature ·27·°C DB / ·19·°C WB
- 2) Select the wire size according to the MCA.
- 3) The maximum allowable voltage that is unbalanced between phases is ·2·%.
- 4) Use a circuit breaker instead of a fuse.
- 5) Only for wall-mounted ·FVXM· units.

Symbols

- MCA: Minimum Circuit Ampere [A]
MFA: Maximum Fuse Ampere [A]
RLA: Rated load amps [A]
OFM: Outdoor fan motor
MSC: Maximum starting current
FLA: Full Load Ampere [A]
kW: Fan motor rated output [kW]

3D129421A

4 Combination table

4 - 1 Combination Table

5MXM-N9

In the combination table, the DHW generator for Multi or Hybrid for Multi is indicated by a capacity index.

For the DHW generator for Multi, the capacity index is "·2.0·". For the Hybrid for Multi, the applicable capacity index (·Note 7·) is indicated on the applicable 'Technical specifications' datasheet.

If the DHW generator for Multi or Hybrid for Multi is present in the system, then only combinations that contain their respective capacity index are allowed combinations. Disregard all other combinations.

Example – DHW generator for Multi

Example: allowed combinations – with DHW generator for Multi	
2.0 + 2.5 + 2.5	DHW generator for Multi + ·2.5· kW class indoor unit + ·2.5· kW class indoor unit
1.5+ 1.5 + 2.0	·1.5· kW class indoor unit + ·1.5· kW class indoor unit + DHW generator for Multi
2.0 + 2.0	·2.0· kW class indoor unit + DHW generator for Multi
...	...

Example – Hybrid for Multi

Example: allowed combinations – with Hybrid for Multi	
1.5+1.5+5.0	·1.5· kW class indoor unit + ·1.5· kW class indoor unit + ·5.0· kW class Hybrid for Multi
2.0+5.0	·2.0· kW class indoor unit + ·5.0· kW class Hybrid for Multi
1.5+1.5+7.1	·1.5· kW class indoor unit + ·1.5· kW class indoor unit + ·7.1· kW class Hybrid for Multi
...	...

To determine the cooling capacity of the system, only take into account the capacity class of the air conditioner indoor units. Ignore the capacity index of the Hybrid for Multi.

To determine the heating/cooling capacity of the system, only take into account the capacity class of the air conditioner indoor units. Ignore the capacity index of the DHW generator for Multi.

Combination of Hybrid for Multi and air conditioner indoor units

If the air conditioning indoor units are of the cooling-only type (and heating is provided by the Hybrid for Multi only), then the heating capacity equals the Hybrid for Multi capacity index.

If the Hybrid for Multi and the air conditioner indoor units both provide heating, then calculate the heating capacity by making the sum of the Hybrid for Multi capacity index and the capacity classes of the air conditioner indoor units.

Caution: Failure to include the capacity classes of the air conditioner indoor units in the calculation will result in capacity shortage, and may result in cold draft issues and/or a shortage of refrigerant in the system.

Example

·1.5· kW class indoor unit + ·1.5· kW class indoor unit + DHW generator for Multi = 1.5 + 1.5 + 2.0

Heating/cooling capacity (Note ·1·) = 1.5 + 1.5

Combination table

OUTDOOR UNIT	INDOOR UNIT	COOLING CAPACITY (kW)			TOTAL CAPACITY (kW)			POWER INPUT COOLING (kW)			TOTAL CURRENT (A)			POWER FACTOR (%)
		A ROOM	B ROOM	C ROOM	Min.	Nom.	Max.	Min.	Nom.	Max.	Min.	Nom.	Max.	
		1.5	1.5	2.0	1.40	1.50	2.20	0.32	0.35	0.46	1.52	1.63	2.2	91
3MXM52/68N2V1B, 4MXM68/80N2V1B, 5MXM90N2V1B	2.00	2.00	—	—	1.40	2.00	2.90	0.32	0.48	0.71	1.52	2.28	3.4	91
	2.50	2.50	—	—	1.40	2.50	3.10	0.32	0.64	0.82	1.52	3.05	3.9	91
	3.50	3.50	—	—	1.40	3.50	4.10	0.32	0.98	1.19	1.52	4.68	5.7	91
	1.50	1.50	—	—	1.60	3.00	4.20	0.34	0.59	1.14	1.63	2.82	5.44	91
	1.5+2.0	1.50	2.00	—	1.60	3.50	4.20	0.34	0.71	1.12	1.63	3.40	5.33	91
	1.5+2.5	1.50	2.50	—	1.60	4.00	4.20	0.34	0.98	1.10	1.63	4.11	5.33	91
	1.5+3.5	1.20	2.80	—	1.60	4.00	4.20	0.34	0.85	1.08	1.63	4.07	5.33	91
	2.0+2.0	2.00	2.00	—	1.60	4.00	4.50	0.34	0.84	1.09	1.63	4.02	5.22	91
	2.0+2.5	1.78	2.22	—	1.60	4.00	4.50	0.34	0.83	1.07	1.63	3.97	5.22	91
	2.0+3.5	1.45	2.55	—	1.60	4.00	4.50	0.34	0.83	1.03	1.63	3.97	5.22	91
	2.5+2.5	2.00	2.00	—	1.60	4.00	4.50	0.34	0.83	1.05	1.63	3.97	5.22	91
	2.5+3.5	1.67	2.33	—	1.60	4.00	4.50	0.34	0.82	1.01	1.63	3.92	5.22	91
	3.5+3.5	2.00	2.00	—	1.60	4.00	4.50	0.34	0.82	0.99	1.63	3.92	5.11	91
	1.5+1.5+1.5	1.33	1.33	1.33	1.70	4.00	4.60	0.36	0.78	0.98	1.74	3.75	4.68	91
	1.5+1.5+2.0	1.20	1.20	1.60	1.70	4.00	4.60	0.36	0.77	0.96	1.74	3.68	4.68	91
	1.5+1.5+2.5	1.09	1.09	1.82	1.70	4.00	4.60	0.36	0.77	0.94	1.74	3.68	4.68	91
	1.5+1.5+3.5	0.92	0.92	2.15	1.70	4.00	4.60	0.36	0.76	0.90	1.74	3.64	4.68	91
	1.5+2.0+2.0	1.09	1.45	1.45	1.70	4.00	4.60	0.36	0.77	0.92	1.74	3.68	4.68	91
	1.5+2.0+2.5	1.00	1.33	1.67	1.70	4.00	4.60	0.36	0.76	0.91	1.74	3.64	4.68	91
	1.5+2.0+3.5	0.86	1.14	2.00	1.70	4.00	4.60	0.36	0.76	0.89	1.74	3.64	4.68	91
	1.5+2.5+2.5	0.92	1.54	1.54	1.70	4.00	4.60	0.36	0.76	0.87	1.74	3.64	4.68	91
	2.0+2.0+2.0	1.33	1.33	1.33	1.70	4.00	4.60	0.36	0.76	0.85	1.74	3.64	4.68	91
	2.0+2.0+2.5	1.23	1.23	1.54	1.70	4.00	4.60	0.36	0.76	0.83	1.74	3.64	4.68	91
	2.0+2.5+2.5	1.14	1.43	1.43	1.70	4.00	4.60	0.36	0.75	0.81	1.74	3.59	4.68	91

Notes

- The heating capacity data are ONLY valid for heating operation by the air conditioner indoor units when there is NO domestic hot water operation by the DHW generator for Multi.
- The DHW generator for Multi and Hybrid for Multi cannot be used as standalone units.
- The system can only contain either the DHW generator for Multi or the Hybrid for Multi.
- The system can only contain one DHW generator for Multi or Hybrid for Multi.
- The Hybrid for Multi can only be combined with ·3MXM52/68N2V1B, 4MXM68/80N2V1B, 5MXM90N2V1B· outdoor units.
- The purpose of Hybrid for Multi in combination with Multi Outdoor unit is for Heating only (space heating and DHW (by boiler only)). The target use of the air conditioner indoor unit in such a system is for cooling only.
A combination of Hybrid and Air conditioner indoor unit, both in heating operation, is NOT the main objective of such a system.
Hence, the heating comfort or continuous operation of the air conditioner indoor unit cannot be guaranteed over the complete operation range.
- In case of Hybrid for Multi, capacity index ·5· corresponds to the ·CHYHBH05· indoor unit.
In case of Hybrid for Multi, capacity index ·7.1· corresponds to the ·CHYHBH08· indoor unit.

Example

·1.5· kW class indoor unit + ·1.5· kW class indoor unit + DHW generator for Multi

In case of cooling-only air conditioner indoor units

Operating state	System	Capacity
Heating mode	·5.0· kW class Hybrid for Multi	
Cooling mode	·2.5· kW class indoor unit + ·3.5· kW class indoor unit	

Performance characteristics

①	②	Indoor air temperature [°C WB]											
		14°C		16°C		18°C		19°C		22°C		24°C	
		TC	PI	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI
1.5+1.5	22.0	3.50	0.50	4.51	0.83	4.78	0.86	4.92	0.88	5.33	0.92	5.61	0.95
	25.0	3.50	0.60	4.34	0.89	4.62	0.92	4.76	0.93	5.17	0.98	5.44	1.01
	32.0	3.50	0.90	3.95	1.03	4.23	1.06	4.37	1.08	4.78	1.12	5.05	1.15
	35.0	3.50	1.06	3.79	1.10	4.06	1.13	4.20	1.14	4.61	1.19	4.89	1.22
	40.0	3.24	1.18	3.51	1.21	3.79	1.24	3.92	1.26	4.33	1.31	4.61	1.34
	43.0	3.07	1.26	3.34	1.29	3.62	1.32	3.76	1.33	4.17	1.38	4.44	1.41
	46.0	2.87	1.30	3.10	1.30	3.34	1.30	3.45	1.30	3.79	1.30	4.00	1.30

3D106169D

4 Combination table

4 - 1 Combination Table

5MXM-N9

Cooling ·(50Hz 230V)·

Outdoor unit	Indoor unit	Cooling capacity [kW]					Total capacity [kW]			Power input [kW]			Total current [A]			Power factor [%]
		Room ·A·	Room ·B·	Room ·C·	Room ·D·	Room ·E·	Min.	Nom.	Max.	Min.	Nom.	Max.	Min.	Nom.	Max.	
5MXM90N2V1B 5MXM90N2V1B9	1,5	1,80	---	---	---	---	1,78	1,80	2,98	0,43	0,48	0,93	1,95	2,20	4,26	95
	2,0	2,00	---	---	---	---	1,86	2,00	3,09	0,44	0,56	0,99	2,00	2,57	4,53	95
	2,5	2,50	---	---	---	---	1,98	2,50	3,61	0,48	0,71	1,14	2,18	3,25	5,24	95
	3,5	3,50	---	---	---	---	2,03	3,50	4,92	0,50	1,14	1,43	2,31	5,22	6,53	95
	4,2	---	---	4,20	---	---	2,06	4,20	5,06	0,51	1,46	1,54	2,35	6,69	7,06	95
	5,0	---	---	5,00	---	---	2,20	5,00	5,94	0,48	1,52	1,74	2,18	6,96	7,95	95
	6,0	---	---	6,00	---	---	2,31	6,00	6,73	0,49	1,89	2,17	2,22	8,65	9,94	95
	7,1	---	---	7,10	---	---	2,43	7,10	7,53	0,51	2,57	2,66	2,35	11,77	12,16	95
	1.5+1.5	1,50	1,50	---	---	---	2,01	3,00	4,11	0,42	0,51	1,01	1,94	2,34	4,64	95
	1.5+2.0	1,50	2,00	---	---	---	2,03	3,50	4,59	0,46	0,63	1,19	2,11	2,89	5,46	95
	1.5+2.5	1,50	2,50	---	---	---	2,09	4,00	5,06	0,42	0,76	1,23	1,94	3,48	5,62	95
	1.5+3.5	1,50	3,50	---	---	---	2,20	5,00	5,94	0,42	1,03	1,59	1,94	4,72	7,29	95
	1.5+4.2	1,50	---	4,20	---	---	2,27	5,70	6,50	0,42	1,28	1,86	1,94	5,86	8,51	95
	1.5+5.0	1,50	---	5,00	---	---	2,36	6,50	7,11	0,46	1,53	2,15	2,11	7,01	9,86	95
	1.5+6.0	1,50	---	6,00	---	---	2,48	7,50	7,79	0,50	1,89	2,29	2,27	8,65	10,47	95
	1.5+7.1	1,50	---	7,10	---	---	2,64	8,60	8,62	0,52	2,28	2,67	2,40	10,44	12,22	95
	2.0+2.0	2,00	2,00	---	---	---	2,09	4,00	5,41	0,46	0,75	1,59	2,11	3,44	7,29	95
	2.0+2.5	2,00	2,50	---	---	---	2,14	4,50	5,84	0,46	0,91	1,59	2,11	4,17	7,29	95
	2.0+3.5	2,00	3,50	---	---	---	2,25	5,50	6,49	0,46	1,18	1,86	2,11	5,41	8,51	95
	2.0+4.2	2,00	---	4,20	---	---	2,33	6,20	6,89	0,46	1,43	2,09	2,11	6,55	9,57	95
	2.0+5.0	2,00	---	5,00	---	---	2,42	7,00	7,46	0,46	1,66	2,31	2,11	7,60	10,55	95
	2.0+6.0	1,88	---	5,63	---	---	2,55	7,50	8,12	0,50	1,85	2,50	2,27	8,47	11,45	95
	2.0+7.1	1,76	---	6,24	---	---	2,71	8,00	8,64	0,52	2,00	2,79	2,40	9,16	12,75	95
	2.5+2.5	2,50	2,50	---	---	---	2,20	5,00	6,32	0,42	1,02	1,77	1,94	4,67	8,11	95
	2.5+3.5	2,50	3,50	---	---	---	2,31	6,00	6,73	0,46	1,40	2,00	2,11	6,41	9,16	95
	2.5+4.2	2,50	---	4,20	---	---	2,39	6,70	7,25	0,46	1,58	2,29	2,11	7,24	10,47	95
	2.5+5.0	2,50	---	5,00	---	---	2,48	7,50	7,79	0,49	1,85	2,51	2,23	8,47	11,49	95
	2.5+6.0	2,35	---	5,65	---	---	2,63	8,00	8,42	0,52	2,00	2,67	2,40	9,16	12,22	95
	2.5+7.1	2,21	---	6,29	---	---	2,79	8,50	8,64	0,55	2,17	2,79	2,53	9,94	12,75	95
	3.5+3.5	3,50	3,50	---	---	---	2,42	7,00	7,46	0,49	1,66	2,39	2,23	7,60	10,96	95
	3.5+4.2	3,50	---	4,20	---	---	2,51	7,70	7,81	0,49	1,92	2,60	2,23	8,79	11,89	95
	3.5+5.0	3,29	---	4,71	---	---	2,63	8,00	8,14	0,52	1,99	2,62	2,40	9,11	11,98	95
	3.5+6.0	2,95	---	5,05	---	---	2,77	8,00	8,62	0,55	1,96	2,79	2,53	8,98	12,75	95
	3.5+7.1	2,97	---	6,03	---	---	2,93	9,00	9,15	0,59	2,41	2,79	2,69	11,03	12,75	95
	4.2+4.2	4,00	---	4,00	---	---	2,61	8,00	8,13	0,52	2,07	2,60	2,36	9,48	11,89	95
	4.2+5.0	3,65	---	4,35	---	---	2,73	8,00	8,49	0,55	2,02	2,73	2,53	9,25	12,50	95
	4.2+6.0	3,50	---	5,00	---	---	2,88	8,50	8,63	0,55	2,21	2,79	2,53	10,12	12,75	95
	4.2+7.1	3,35	---	5,65	---	---	3,04	9,00	9,18	0,59	2,41	2,90	2,69	11,03	13,28	95
	5.0+5.0	4,25	---	4,25	---	---	2,85	8,50	8,92	0,55	2,10	2,84	2,53	9,62	12,99	95
	5.0+6.0	4,09	---	4,91	---	---	2,99	9,00	9,16	0,59	2,20	2,89	2,69	10,07	13,24	95
	5.0+7.1	3,72	---	5,28	---	---	3,16	9,00	9,06	0,62	2,17	3,02	2,82	9,94	13,81	95
	6.0+6.0	4,50	---	4,50	---	---	3,14	9,00	9,46	0,59	2,19	2,99	2,69	10,03	13,69	95
	6.0+7.1	4,12	---	4,88	---	---	3,30	9,00	9,48	0,63	2,16	2,99	2,86	9,89	13,69	95
	7.1+7.1	4,50	---	4,50	---	---	3,46	9,00	9,50	0,65	2,16	2,99	2,99	9,89	13,69	95

Notes

- 1.The total capacity of each connected indoor unit is up to ·14.2·kW.
- 2.The values above are for connecting with the following indoor unit types:
·1.5,2.0,2.5,3.5,4.2,5.0,6.0,7.1· kW class
Wall-mounted ·FTXM-M, FTXM-N, FTXM-R· series
3. These indoor units can only be used in a multi-unit setup.
4. Cooling capacity conditions
Indoor temperature ·27·°C DB / ·19·°C WB
Outdoor temperature ·35·°C DB

3D105424A

4 Combination table

4 - 1 Combination Table

5MXM-N9

Cooling (50Hz 230V)

Outdoor unit	Indoor unit	Cooling capacity [kW]					Total capacity [kW]			Power input [kW]			Total current [A]			Power factor [%]
		Room ·A·	Room ·B·	Room ·C·	Room ·D·	Room ·E·	Min.	Nom.	Max.	Min.	Nom.	Max.	Min.	Nom.	Max.	
5MXM90N2V1B 5MXM90N2V1B9	1.5+1.5+1.5	1,50	1,50	1,50	---	---	2,14	4,50	5,51	0,43	0,83	1,24	1,98	3,80	5,66	95
	1.5+1.5+2.0	1,50	1,50	2,00	---	---	2,20	5,00	5,94	0,43	0,96	1,40	1,98	4,40	6,39	95
	1.5+1.5+2.5	1,50	1,50	2,50	---	---	2,25	5,50	6,34	0,43	1,09	1,57	1,98	4,99	7,17	95
	1.5+1.5+3.5	1,50	1,50	3,50	---	---	2,36	6,50	7,11	0,46	1,38	1,93	2,11	6,32	8,84	95
	1.5+1.5+4.2	1,50	1,50	4,20	---	---	2,44	7,20	7,60	0,46	1,61	2,18	2,11	7,37	9,98	95
	1.5+1.5+5.0	1,41	1,41	4,69	---	---	2,55	7,50	8,12	0,50	1,75	2,41	2,27	8,01	11,04	95
	1.5+1.5+6.0	1,33	1,33	5,33	---	---	2,70	8,00	8,70	0,53	1,96	2,51	2,44	8,98	11,49	95
	1.5+1.5+7.1	1,26	1,26	5,98	---	---	2,86	8,50	9,25	0,56	2,20	2,87	2,57	10,07	13,12	95
	1.5+2.0+2.0	1,50	2,00	2,00	---	---	2,25	5,50	6,34	0,46	1,09	1,57	2,11	4,99	7,17	95
	1.5+2.0+2.5	1,50	2,00	2,50	---	---	2,31	6,00	6,73	0,43	1,23	1,74	1,98	5,63	7,98	95
	1.5+2.0+3.5	1,50	2,00	3,50	---	---	2,42	7,00	7,46	0,46	1,52	2,14	2,11	6,96	9,78	95
	1.5+2.0+4.2	1,50	2,00	4,20	---	---	2,51	7,70	7,93	0,50	1,83	2,39	2,27	8,38	10,96	95
	1.5+2.0+5.0	1,41	1,88	4,71	---	---	2,63	8,00	8,42	0,50	1,95	2,57	2,27	8,93	11,77	95
	1.5+2.0+6.0	1,26	1,68	5,05	---	---	2,77	8,00	8,96	0,53	1,94	2,68	2,44	8,88	12,26	95
	1.5+2.0+7.1	1,27	1,70	6,03	---	---	2,93	9,00	9,30	0,56	2,39	2,87	2,57	10,94	13,12	95
	1.5+2.5+2.5	1,50	2,50	2,50	---	---	2,36	6,50	7,11	0,46	1,39	1,93	2,11	6,37	8,84	95
	1.5+2.5+3.5	1,50	2,50	3,50	---	---	2,48	7,50	7,79	0,50	1,72	2,29	2,27	7,88	10,47	95
	1.5+2.5+4.2	1,46	2,44	4,10	---	---	2,58	8,00	8,24	0,50	1,99	2,56	2,27	9,11	11,73	95
	1.5+2.5+5.0	1,33	2,22	4,44	---	---	2,70	8,00	8,70	0,52	1,95	2,75	2,40	8,93	12,59	95
	1.5+2.5+6.0	1,28	2,13	5,10	---	---	2,85	8,50	9,21	0,53	2,20	2,87	2,44	10,07	13,12	95
	1.5+2.5+7.1	1,22	2,03	5,76	---	---	3,01	9,00	9,49	0,56	2,39	2,99	2,57	10,94	13,69	95
	1.5+3.5+3.5	1,41	3,29	3,29	---	---	2,63	8,00	8,42	0,52	2,00	2,67	2,40	9,16	12,22	95
	1.5+3.5+4.2	1,30	3,04	3,65	---	---	2,73	8,00	8,65	0,52	1,99	2,79	2,40	9,11	12,75	95
	1.5+3.5+5.0	1,28	2,98	4,25	---	---	2,85	8,50	8,83	0,56	2,20	2,81	2,57	10,07	12,87	95
	1.5+3.5+6.0	1,23	2,86	4,91	---	---	2,99	9,00	9,29	0,56	2,39	2,87	2,57	10,94	13,12	95
	1.5+3.5+7.1	1,12	2,60	5,28	---	---	3,16	9,00	9,50	0,59	2,36	2,99	2,69	10,81	13,69	95
	1.5+4.2+4.2	1,36	---	3,82	3,82	---	2,83	9,00	9,17	0,55	2,23	2,79	2,53	10,21	12,75	95
	1.5+4.2+5.0	1,26	---	3,53	4,21	---	2,95	9,00	9,19	0,56	2,18	2,81	2,57	9,98	12,87	95
	1.5+4.2+6.0	1,15	---	3,23	4,62	---	3,10	9,00	9,49	0,59	2,15	2,99	2,69	9,84	13,69	95
	1.5+4.2+7.1	1,05	---	2,95	4,99	---	3,26	9,00	9,51	0,63	2,13	2,99	2,86	9,75	13,69	95
	1.5+5.0+5.0	1,17	---	3,91	3,91	---	3,07	9,00	9,20	0,59	2,04	2,95	2,69	9,34	13,52	95
	1.5+5.0+6.0	1,08	---	3,60	4,32	---	3,21	9,00	9,66	0,59	2,03	3,02	2,69	9,30	13,81	95
	1.5+5.0+7.1	0,99	---	3,31	4,70	---	3,38	9,00	9,68	0,63	2,01	3,02	2,86	9,20	13,81	95
	1.5+6.0+6.0	1,00	---	4,00	4,00	---	3,36	9,00	10,13	0,63	2,02	3,08	2,86	9,25	14,09	95
	1.5+6.0+7.1	1,19	---	3,58	4,23	---	3,51	9,00	10,15	0,65	2,00	3,08	2,99	9,16	14,09	95
	2.0+2.0+2.0	2,00	2,00	2,00	---	---	2,31	6,00	6,76	0,46	1,23	1,74	2,11	5,63	7,98	95
	2.0+2.0+2.5	2,00	2,00	2,50	---	---	2,36	6,50	7,11	0,46	1,39	1,93	2,11	6,37	8,84	95
	2.0+2.0+3.5	2,00	2,00	3,50	---	---	2,48	7,50	7,79	0,50	1,72	2,29	2,27	7,88	10,47	95
	2.0+2.0+4.2	2,00	2,00	4,20	---	---	2,58	8,20	8,24	0,50	2,04	2,56	2,27	9,34	11,73	95
	2.0+2.0+5.0	1,78	1,78	4,44	---	---	2,70	8,00	8,70	0,52	1,95	2,75	2,40	8,93	12,59	95
	2.0+2.0+6.0	1,70	1,70	5,10	---	---	2,85	8,50	9,21	0,53	2,20	2,87	2,44	10,07	13,12	95
	2.0+2.0+7.1	1,62	1,62	5,76	---	---	3,01	9,00	9,49	0,56	2,36	2,99	2,57	10,81	13,69	95
	2.0+2.5+2.5	2,00	2,50	2,50	---	---	2,42	7,00	7,46	0,46	1,52	2,14	2,11	6,96	9,78	95
	2.0+2.5+3.5	1,88	2,34	3,28	---	---	2,55	7,50	8,12	0,50	1,72	2,50	2,27	7,88	11,45	95

Notes

- 1.The total capacity of each connected indoor unit is up to ·14.6·kW.
- 2.The values above are for connecting with the following indoor unit types:
·1.5,2.0,2.5,3.5,4.2,5.0,6.0,7.1· kW class
Wall-mounted ·FTXM-M, FTXM-N, FTXM-R· series
- 3.These indoor units can only be used in a multi-unit setup.
- 4.Cooling capacity conditions
Indoor temperature ·27·°C DB / ·19·°C WB
Outdoor temperature ·35·°C DB

3D105425A

4 Combination table

4 - 1 Combination Table

5MXM-N9

Cooling · (50Hz 230V) ·

Outdoor unit	Indoor unit	Cooling capacity [kW]					Total capacity [kW]			Power input [kW]			Total current [A]			Power factor [%]
		Room · A ·	Room · B ·	Room · C ·	Room · D ·	Room · E ·	Min.	Nom.	Max.	Min.	Nom.	Max.	Min.	Nom.	Max.	
5MXM90N2V1B	2.0+2.5+4.2	1,84	2,30	3,86	---	---	2,66	8,00	8,53	0,52	1,99	2,73	2,40	9,11	12,50	95
	2.0+2.5+5.0	1,68	2,11	4,21	---	---	2,77	8,00	8,82	0,52	1,95	2,80	2,40	8,93	12,83	95
	2.0+2.5+6.0	1,66	2,07	4,97	---	---	2,92	8,70	9,28	0,56	2,29	2,87	2,57	10,49	13,12	95
	2.0+2.5+7.1	1,55	1,94	5,51	---	---	3,08	9,00	9,49	0,59	2,35	2,99	2,69	10,76	13,69	95
	2.0+3.5+3.5	1,78	3,11	3,11	---	---	2,70	8,00	8,64	0,52	1,98	2,79	2,40	9,07	12,75	95
	2.0+3.5+4.2	1,75	3,07	3,68	---	---	2,80	8,50	8,65	0,55	2,17	2,79	2,53	9,94	12,75	95
	2.0+3.5+5.0	1,66	2,90	4,14	---	---	2,92	8,70	8,83	0,56	2,28	2,81	2,57	10,44	12,87	95
	2.0+3.5+6.0	1,57	2,74	4,70	---	---	3,07	9,00	9,48	0,59	2,35	2,99	2,69	10,76	13,69	95
	2.0+3.5+7.1	1,43	2,50	5,07	---	---	3,23	9,00	9,50	0,63	2,32	2,99	2,86	10,62	13,69	95
	2.0+4.2+4.2	1,67	---	3,51	3,51	---	2,91	8,70	8,83	0,55	2,24	2,79	2,53	10,26	12,75	95
	2.0+4.2+5.0	1,61	---	3,38	4,02	---	3,02	9,00	9,02	0,59	2,36	2,93	2,69	10,81	13,40	95
	2.0+4.2+6.0	1,48	---	3,10	4,43	---	3,17	9,00	9,49	0,59	2,33	2,99	2,69	10,67	13,69	95
	2.0+4.2+7.1	1,35	---	2,84	4,80	---	3,33	9,00	9,51	0,63	2,30	2,99	2,86	10,53	13,69	95
	2.0+5.0+5.0	1,50	---	3,75	3,75	---	3,14	9,00	9,20	0,59	2,22	2,95	2,69	10,17	13,52	95
	2.0+5.0+6.0	1,38	---	3,46	4,15	---	3,29	9,00	9,66	0,63	2,19	3,02	2,86	10,03	13,81	95
	2.0+5.0+7.1	1,28	---	3,19	4,53	---	3,45	9,00	9,68	0,65	2,17	3,02	2,99	9,94	13,81	95
	2.0+6.0+6.0	1,29	---	3,86	3,86	---	3,43	9,00	10,13	0,63	2,18	3,08	2,86	9,98	14,09	95
	2.0+6.0+7.1	1,19	---	3,58	4,23	---	3,59	9,00	10,61	0,65	2,16	3,56	2,99	9,89	16,29	95
	2.5+2.5+2.5	2,50	2,50	2,50	---	---	2,48	7,50	7,79	0,50	1,71	2,29	2,27	7,83	10,47	95
	2.5+2.5+3.5	2,35	2,35	3,29	---	---	2,63	8,00	8,42	0,52	1,98	2,67	2,40	9,07	12,22	95
	2.5+2.5+4.2	2,17	2,17	3,65	---	---	2,73	8,00	8,64	0,52	1,97	2,79	2,40	9,02	12,75	95
	2.5+2.5+5.0	2,13	2,13	4,25	---	---	2,85	8,50	8,82	0,56	2,20	2,80	2,57	10,07	12,83	95
	2.5+2.5+6.0	2,05	2,05	4,91	---	---	2,99	9,00	9,28	0,56	2,35	2,87	2,57	10,76	13,12	95
	2.5+2.5+7.1	1,86	1,86	5,28	---	---	3,16	9,00	9,49	0,59	2,32	2,99	2,69	10,62	13,69	95
	2.5+3.5+3.5	2,11	2,95	2,95	---	---	2,77	8,00	8,64	0,55	1,96	2,79	2,53	8,98	12,75	95
	2.5+3.5+4.2	2,08	2,92	3,50	---	---	2,88	8,50	8,65	0,55	2,19	2,79	2,53	10,03	12,75	95
	2.5+3.5+5.0	2,05	2,86	4,09	---	---	2,99	9,00	9,09	0,59	2,33	2,84	2,69	10,67	13,02	95
	2.5+3.5+6.0	1,88	2,63	4,50	---	---	3,14	9,00	9,48	0,59	2,30	2,99	2,69	10,53	13,69	95
	2.5+3.5+7.1	1,72	2,40	4,88	---	---	3,30	9,00	9,50	0,63	2,27	2,99	2,86	10,39	13,69	95
	2.5+4.2+4.2	2,00	---	3,35	3,35	---	2,98	8,70	8,86	0,59	2,33	2,85	2,69	10,67	13,04	95
	2.5+4.2+5.0	1,92	---	3,23	3,85	---	3,10	9,00	9,02	0,59	2,35	2,93	2,69	10,76	13,40	95
	2.5+4.2+6.0	1,77	---	2,98	4,25	---	3,24	9,00	9,49	0,63	2,32	2,99	2,86	10,62	13,69	95
	2.5+4.2+7.1	1,63	---	2,74	4,63	---	3,41	9,00	9,51	0,65	2,29	2,99	2,99	10,49	13,69	95
	2.5+5.0+5.0	1,80	---	3,60	3,60	---	3,21	9,00	9,20	0,62	2,21	3,00	2,82	10,12	13,73	95
	2.5+5.0+6.0	1,67	---	3,33	4,00	---	3,36	9,00	9,66	0,63	2,18	3,02	2,86	9,98	13,81	95
	2.5+5.0+7.1	1,54	---	3,08	4,38	---	3,51	9,00	9,68	0,65	2,16	3,02	2,99	9,89	13,81	95
	2.5+6.0+6.0	1,55	---	3,72	3,72	---	3,50	9,00	10,13	0,65	2,17	3,08	2,99	9,94	14,09	95
	2.5+6.0+7.1	1,44	---	3,46	4,10	---	3,66	9,00	10,61	0,65	2,15	3,56	2,99	9,84	16,29	95
	3.5+3.5+3.5	2,90	2,90	2,90	---	---	2,92	8,70	8,77	0,59	2,23	2,90	2,69	10,21	13,28	95
	3.5+3.5+4.2	2,75	2,75	3,30	---	---	3,02	8,80	8,83	0,59	2,34	2,90	2,69	10,71	13,28	95
	3.5+3.5+5.0	2,63	2,63	3,75	---	---	3,14	9,00	9,02	0,62	2,33	2,95	2,82	10,67	13,52	95
	3.5+3.5+6.0	2,42	2,42	4,15	---	---	3,29	9,00	9,49	0,63	2,30	2,99	2,86	10,53	13,69	95
	3.5+3.5+7.1	2,23	2,23	4,53	---	---	3,45	9,00	9,51	0,65	2,28	2,99	2,99	10,44	13,69	95
	3.5+4.2+4.2	2,65	---	3,18	3,18	---	3,13	9,00	9,14	0,62	2,38	2,93	2,82	10,90	13,43	95

Notes

1. The total capacity of each connected indoor unit is up to ·15.6·kW.
2. The values above are for connecting with the following indoor unit types:
·2.0,2.5,3.5,4.2,5.0,6.0,7.1· kW class
Wall-mounted ·FTXM-M, FTXM-N, FTXM-R· series
3. These indoor units can only be used in a multi-unit setup.
4. Cooling capacity conditions
Indoor temperature ·27·°C DB / ·19·°C WB
Outdoor temperature ·35·°C DB

3D105426A

4 Combination table

4 - 1 Combination Table

5MXM-N9

Cooling ·(50Hz 230V)·

Outdoor unit	Indoor unit	Cooling capacity [kW]					Total capacity [kW]			Power input [kW]			Total current [A]			Power factor [%]
		Room ·A·	Room ·B·	Room ·C·	Room ·D·	Room ·E·	Min.	Nom.	Max.	Min.	Nom.	Max.	Min.	Nom.	Max.	
5MXM90N2V1B 5MXM90N2V1B9	3.5+4.2+5.0	2,48	---	2,98	3,54	---	3,24	9,00	9,18	0,62	2,32	2,93	2,82	10,62	13,40	95
	3.5+4.2+6.0	2,30	---	2,76	3,94	---	3,39	9,00	9,50	0,65	2,29	2,99	2,99	10,49	13,69	95
	3.5+4.2+7.1	2,13	---	2,55	4,32	---	3,54	9,00	10,01	0,69	2,26	3,52	3,16	10,35	16,09	95
	3.5+5.0+5.0	2,33	---	3,33	3,33	---	3,36	9,00	9,20	0,65	2,19	2,98	2,99	10,03	13,65	95
	3.5+5.0+6.0	2,17	---	3,10	3,72	---	3,50	9,00	9,67	0,65	2,16	3,02	2,99	9,89	13,81	95
	3.5+5.0+7.1	2,02	---	2,88	4,10	---	3,66	9,00	10,14	0,69	2,14	3,48	3,16	9,80	15,93	95
	3.5+6.0+6.0	2,03	---	3,48	3,48	---	3,65	9,00	10,59	0,65	2,15	3,56	2,99	9,84	16,29	95
	4.2+4.2+4.2	3,00	---	3,00	3,00	---	3,23	9,00	9,18	0,65	2,37	2,91	2,99	10,85	13,32	95
	4.2+4.2+5.0	2,82	---	2,82	3,36	---	3,35	9,00	9,26	0,65	2,31	2,93	2,99	10,58	13,40	95
	4.2+4.2+6.0	2,63	---	2,63	3,75	---	3,48	9,00	9,51	0,65	2,28	2,99	2,99	10,44	13,69	95
	4.2+4.2+7.1	2,44	---	2,44	4,12	---	3,65	9,00	10,02	0,69	2,25	3,52	3,16	10,30	16,09	95
	4.2+5.0+5.0	2,66	---	3,17	3,17	---	3,46	9,00	9,21	0,68	2,30	2,95	3,12	10,53	13,52	95
	4.2+5.0+6.0	2,49	---	2,96	3,55	---	3,60	9,00	10,18	0,69	2,27	3,54	3,16	10,39	16,21	95
	5.0+5.0+5.0	3,00	---	3,00	3,00	---	3,57	9,00	9,98	0,69	2,29	3,62	3,16	10,49	16,58	95
	1.5+1.5+1.5+1.5	1,50	1,50	1,50	1,50	---	2,31	6,00	6,73	0,44	1,25	1,44	2,02	5,73	6,60	95
	1.5+1.5+1.5+2.0	1,50	1,50	1,50	2,00	---	2,36	6,50	7,11	0,47	1,38	1,62	2,15	6,32	7,41	95
	1.5+1.5+1.5+2.5	1,50	1,50	1,50	2,50	---	2,42	7,00	7,46	0,47	1,50	1,76	2,15	6,87	8,06	95
	1.5+1.5+1.5+3.5	1,41	1,41	1,41	3,28	---	2,55	7,50	8,12	0,50	1,63	2,06	2,27	7,46	9,45	95
	1.5+1.5+1.5+4.2	1,38	1,38	1,38	3,86	---	2,66	8,00	8,53	0,50	1,94	2,39	2,27	8,88	10,96	95
	1.5+1.5+1.5+5.0	1,26	1,26	1,26	4,21	---	2,77	8,00	8,96	0,53	1,90	2,58	2,44	8,70	11,81	95
	1.5+1.5+1.5+6.0	1,24	1,24	1,24	4,97	---	2,92	8,70	9,44	0,53	2,34	2,63	2,44	10,71	12,02	95
	1.5+1.5+1.5+7.1	1,16	1,16	1,16	5,51	---	3,08	9,00	9,86	0,56	2,39	2,88	2,57	10,94	13,20	95
	1.5+1.5+2.0+2.0	1,50	1,50	2,00	2,00	---	2,42	7,00	7,46	0,47	1,50	1,76	2,15	6,87	8,06	95
	1.5+1.5+2.0+2.5	1,50	1,50	2,00	2,50	---	2,48	7,50	7,79	0,47	1,63	1,91	2,15	7,46	8,76	95
	1.5+1.5+2.0+3.5	1,41	1,41	1,88	3,29	---	2,63	8,00	8,42	0,50	1,94	2,23	2,27	8,88	10,18	95
	1.5+1.5+2.0+4.2	1,30	1,30	1,74	3,65	---	2,73	8,00	8,80	0,53	1,94	2,56	2,44	8,88	11,73	95
	1.5+1.5+2.0+5.0	1,28	1,28	1,70	4,25	---	2,85	8,50	9,21	0,53	2,23	2,77	2,44	10,21	12,67	95
	1.5+1.5+2.0+6.0	1,23	1,23	1,64	4,91	---	2,99	9,00	9,64	0,56	2,39	2,75	2,57	10,94	12,59	95
	1.5+1.5+2.0+7.1	1,12	1,12	1,49	5,28	---	3,16	9,00	10,04	0,60	2,36	3,02	2,74	10,81	13,81	95
	1.5+1.5+2.5+2.5	1,41	1,41	2,34	2,34	---	2,55	7,50	8,12	0,50	1,63	2,06	2,27	7,46	9,45	95
	1.5+1.5+2.5+3.5	1,33	1,33	2,22	3,11	---	2,70	8,00	8,70	0,53	1,94	2,51	2,44	8,88	11,49	95
	1.5+1.5+2.5+4.2	1,31	1,31	2,19	3,68	---	2,80	8,50	9,06	0,53	2,25	2,74	2,44	10,30	12,55	95
	1.5+1.5+2.5+5.0	1,24	1,24	2,07	4,14	---	2,92	8,70	9,44	0,56	2,33	2,89	2,57	10,67	13,24	95
	1.5+1.5+2.5+6.0	1,17	1,17	1,96	4,70	---	3,07	9,00	9,83	0,56	2,43	2,88	2,57	11,13	13,20	95
	1.5+1.5+2.5+7.1	1,07	1,07	1,79	5,07	---	3,23	9,00	10,16	0,60	2,40	3,08	2,74	10,99	14,09	95
	1.5+1.5+3.5+3.5	1,28	1,28	2,98	2,98	---	2,85	8,50	9,21	0,53	2,25	2,80	2,44	10,30	12,83	95
	1.5+1.5+3.5+4.2	1,26	1,26	2,94	3,53	---	2,95	9,00	9,32	0,56	2,47	2,87	2,57	11,31	13,12	95
	1.5+1.5+3.5+5.0	1,17	1,17	2,74	3,91	---	3,07	9,00	9,68	0,59	2,40	3,02	2,69	10,99	13,81	95
	1.5+1.5+3.5+6.0	1,08	1,08	2,52	4,32	---	3,21	9,00	10,15	0,59	2,37	3,08	2,69	10,85	14,09	95
	1.5+1.5+3.5+7.1	0,99	0,99	2,32	4,70	---	3,38	9,00	10,17	0,63	2,34	3,08	2,86	10,71	14,09	95
	1.5+1.5+4.2+4.2	1,18	1,18	3,32	3,32	---	3,05	9,00	9,52	0,59	2,45	2,99	2,69	11,22	13,69	95
	1.5+1.5+4.2+5.0	1,11	1,11	3,10	3,69	---	3,17	9,00	9,69	0,59	2,39	3,02	2,69	10,94	13,81	95
	1.5+1.5+4.2+6.0	1,02	1,02	2,86	4,09	---	3,32	9,00	10,16	0,60	2,36	3,08	2,74	10,81	14,09	95
	1.5+1.5+4.2+7.1	0,94	0,94	2,64	4,47	---	3,47	9,00	10,18	0,63	2,33	3,08	2,86	10,67	14,09	95

Notes

1. The total capacity of each connected indoor unit is up to ·15.2·kW.
2. The values above are for connecting with the following indoor unit types:
·1.5,2.0,2.5,3.5,4.2,5.0,6.0,7.1· kW class
Wall-mounted ·FTXM-M, FTXM-N, FTXM-R· series
3. These indoor units can only be used in a multi-unit setup.
4. Cooling capacity conditions
Indoor temperature ·27·°C DB / ·19·°C WB
Outdoor temperature ·35·°C DB

3D105427A

4 Combination table

4 - 1 Combination Table

5MXM-N9

Cooling ·(50Hz 230V)·

Outdoor unit	Indoor unit	Cooling capacity [kW]					Total capacity [kW]			Power input [kW]			Total current [A]			Power factor [%]
		Room ·A·	Room ·B·	Room ·C·	Room ·D·	Room ·E·	Min.	Nom.	Max.	Min.	Nom.	Max.	Min.	Nom.	Max.	
5MXM90N2V1B 5MXM90N2V1B9	1.5+1.5+5.0+5.0	1,04	1,04	3,46	3,46	---	3,29	9,00	9,87	0,63	2,24	3,04	2,86	10,26	13,93	95
	1.5+1.5+5.0+6.0	0,96	0,96	3,21	3,86	---	3,43	9,00	10,34	0,63	2,21	3,11	2,86	10,12	14,22	95
	1.5+1.5+5.0+7.1	0,89	0,89	2,98	4,23	---	3,59	9,00	10,67	0,65	2,19	3,45	2,99	10,03	15,80	95
	1.5+1.5+6.0+6.0	0,90	0,90	3,60	3,60	---	3,57	9,00	10,66	0,63	2,20	3,10	2,86	10,07	14,17	95
	1.5+2.0+2.0+2.0	1,50	2,00	2,00	2,00	---	2,48	7,50	7,79	0,47	1,63	1,91	2,15	7,46	8,76	95
	1.5+2.0+2.0+2.5	1,41	1,88	1,88	2,34	---	2,55	7,50	8,12	0,50	1,62	2,06	2,27	7,42	9,45	95
	1.5+2.0+2.0+3.5	1,33	1,78	1,78	3,11	---	2,70	8,00	8,70	0,53	1,94	2,34	2,44	8,88	10,71	95
	1.5+2.0+2.0+4.2	1,31	1,75	1,75	3,68	---	2,80	8,50	9,06	0,53	2,25	2,74	2,44	10,30	12,55	95
	1.5+2.0+2.0+5.0	1,24	1,66	1,66	4,14	---	2,92	8,70	9,44	0,56	2,34	2,89	2,57	10,71	13,24	95
	1.5+2.0+2.0+6.0	1,17	1,57	1,57	4,70	---	3,07	9,00	9,83	0,56	2,43	2,88	2,57	11,13	13,20	95
	1.5+2.0+2.0+7.1	1,07	1,43	1,43	5,07	---	3,23	9,00	10,16	0,60	2,40	3,08	2,74	10,99	14,09	95
	1.5+2.0+2.5+2.5	1,41	1,88	2,35	2,35	---	2,63	8,00	8,42	0,50	1,95	2,23	2,27	8,93	10,18	95
	1.5+2.0+2.5+3.5	1,26	1,68	2,11	2,95	---	2,77	8,00	8,96	0,53	1,94	2,69	2,44	8,88	12,30	95
	1.5+2.0+2.5+4.2	1,25	1,67	2,08	3,50	---	2,88	8,50	9,30	0,56	2,24	2,87	2,57	10,26	13,12	95
	1.5+2.0+2.5+5.0	1,23	1,64	2,05	4,09	---	2,99	9,00	9,49	0,56	2,44	2,89	2,57	11,17	13,24	95
	1.5+2.0+2.5+6.0	1,13	1,50	1,88	4,50	---	3,14	9,00	10,01	0,59	2,41	3,01	2,69	11,03	13,77	95
	1.5+2.0+2.5+7.1	1,03	1,37	1,72	4,88	---	3,30	9,00	10,16	0,60	2,38	3,08	2,74	10,90	14,09	95
	1.5+2.0+3.5+3.5	1,24	1,66	2,90	2,90	---	2,92	8,70	9,31	0,56	2,34	2,87	2,57	10,71	13,12	95
	1.5+2.0+3.5+4.2	1,21	1,61	2,81	3,38	---	3,02	9,00	9,51	0,56	2,45	2,99	2,57	11,22	13,69	95
	1.5+2.0+3.5+5.0	1,13	1,50	2,63	3,75	---	3,14	9,00	9,68	0,59	2,39	3,02	2,69	10,94	13,81	95
	1.5+2.0+3.5+6.0	1,04	1,38	2,42	4,15	---	3,29	9,00	10,15	0,59	2,36	3,08	2,69	10,81	14,09	95
	1.5+2.0+3.5+7.1	0,96	1,28	2,23	4,53	---	3,45	9,00	10,17	0,63	2,33	3,08	2,86	10,67	14,09	95
	1.5+2.0+4.2+4.2	1,13	1,51	3,18	3,18	---	3,13	9,00	9,52	0,59	2,44	2,99	2,69	11,17	13,69	95
	1.5+2.0+4.2+5.0	1,06	1,42	2,98	3,54	---	3,24	9,00	9,69	0,63	2,38	3,02	2,86	10,90	13,81	95
	1.5+2.0+4.2+6.0	0,99	1,31	2,76	3,94	---	3,39	9,00	10,16	0,63	2,35	3,08	2,86	10,76	14,09	95
	1.5+2.0+4.2+7.1	0,91	1,22	2,55	4,32	---	3,54	9,00	10,63	0,65	2,32	3,57	2,99	10,62	16,33	95
	1.5+2.0+5.0+5.0	1,00	1,33	3,33	3,33	---	3,36	9,00	9,87	0,63	2,26	3,04	2,86	10,35	13,93	95
	1.5+2.0+5.0+6.0	0,93	1,24	3,10	3,72	---	3,50	9,00	10,34	0,63	2,23	3,11	2,86	10,21	14,22	95
	1.5+2.0+5.0+7.1	0,87	1,15	2,88	4,10	---	3,66	9,00	10,71	0,65	2,20	3,45	2,99	10,07	15,80	95
	1.5+2.0+6.0+6.0	0,87	1,16	3,48	3,48	---	3,65	9,00	10,70	0,65	2,22	3,10	2,99	10,17	14,17	95
	1.5+2.5+2.5+2.5	1,33	2,22	2,22	2,22	---	2,70	8,00	8,70	0,53	1,94	2,39	2,44	8,88	10,96	95
	1.5+2.5+2.5+3.5	1,28	2,13	2,13	2,98	---	2,85	8,50	9,21	0,53	2,24	2,87	2,44	10,26	13,12	95
	1.5+2.5+2.5+4.2	1,26	2,10	2,10	3,53	---	2,95	9,00	9,31	0,56	2,44	2,87	2,57	11,17	13,12	95
	1.5+2.5+2.5+5.0	1,17	1,96	1,96	3,91	---	3,07	9,00	9,68	0,59	2,38	3,02	2,69	10,90	13,81	95
	1.5+2.5+2.5+6.0	1,08	1,80	1,80	4,32	---	3,21	9,00	10,14	0,59	2,35	3,08	2,69	10,76	14,09	95
	1.5+2.5+2.5+7.1	0,99	1,65	1,65	4,70	---	3,38	9,00	10,16	0,63	2,32	3,08	2,86	10,62	14,09	95
	1.5+2.5+3.5+3.5	1,23	2,05	2,86	2,86	---	2,99	9,00	9,31	0,56	2,36	2,87	2,57	10,81	13,12	95
	1.5+2.5+3.5+4.2	1,15	1,92	2,69	3,23	---	3,10	9,00	9,51	0,59	2,35	2,99	2,69	10,76	13,69	95
	1.5+2.5+3.5+5.0	1,08	1,80	2,52	3,60	---	3,21	9,00	9,68	0,59	2,29	3,02	2,69	10,49	13,81	95
	1.5+2.5+3.5+6.0	1,00	1,67	2,33	4,00	---	3,36	9,00	10,15	0,63	2,26	3,08	2,86	10,35	14,09	95
	1.5+2.5+3.5+7.1	0,92	1,54	2,16	4,38	---	3,51	9,00	10,17	0,65	2,23	3,08	2,99	10,21	14,09	95
	1.5+2.5+4.2+4.2	1,09	1,81	3,05	3,05	---	3,20	9,00	9,52	0,59	2,33	2,99	2,69	10,67	13,69	95
	1.5+2.5+4.2+5.0	1,02	1,70	2,86	3,41	---	3,32	9,00	9,69	0,63	2,28	3,02	2,86	10,44	13,81	95
	1.5+2.5+4.2+6.0	0,95	1,58	2,66	3,80	---	3,46	9,00	10,16	0,63	2,25	3,08	2,86	10,30	14,09	95

Notes

- 1.The total capacity of each connected indoor unit is up to ·15.1·kW.
2. The values above are for connecting with the following indoor unit types:
·1.5,2.0,2.5,3.5,4.2,5.0,6.0,7.1· kW class
Wall-mounted ·FTXM-M, FTXM-N, FTXM-R· series
- 3.These indoor units can only be used in a multi-unit setup.
4. Cooling capacity conditions
Indoor temperature ·27·°C DB / ·19·°C WB
Outdoor temperature ·35·°C DB

3D105428A

4 Combination table

4 - 1 Combination Table

5MXM-N9

Cooling (50Hz 230V)

Outdoor unit	Indoor unit	Cooling capacity [kW]					Total capacity [kW]			Power input [kW]			Total current [A]			Power factor [%]
		Room · A ·	Room · B ·	Room · C ·	Room · D ·	Room · E ·	Min.	Nom.	Max.	Min.	Nom.	Max.	Min.	Nom.	Max.	
5MXM90N2V1B 5MXM90N2V1B9	1.5+2.5+4.2+7.1	0,88	1,47	2,47	4,18	---	3,62	9,00	10,68	0,65	2,22	3,64	2,99	10,17	16,66	95
	1.5+2.5+5.0+5.0	0,96	1,61	3,21	3,21	---	3,20	9,00	9,52	0,59	2,26	2,99	2,69	10,35	13,69	95
	1.5+2.5+5.0+6.0	0,90	1,50	3,00	3,60	---	3,32	9,00	9,69	0,63	2,24	3,02	2,86	10,26	13,81	95
	1.5+3.5+3.5+3.5	1,13	2,63	2,63	2,63	---	3,14	9,00	9,51	0,59	2,35	2,99	2,69	10,76	13,69	95
	1.5+3.5+3.5+4.2	1,06	2,48	2,48	2,98	---	3,24	9,00	9,52	0,63	2,33	2,99	2,86	10,67	13,69	95
	1.5+3.5+3.5+5.0	1,00	2,33	2,33	3,33	---	3,36	9,00	9,69	0,63	2,28	3,02	2,86	10,44	13,81	95
	1.5+3.5+3.5+6.0	0,93	2,17	2,17	3,72	---	3,50	9,00	10,16	0,63	2,25	3,08	2,86	10,30	14,09	95
	1.5+3.5+3.5+7.1	0,87	2,02	2,02	4,10	---	3,66	9,00	10,71	0,65	2,22	3,71	2,99	10,17	16,99	95
	1.5+3.5+4.2+4.2	1,01	2,35	2,82	2,82	---	3,35	9,00	9,52	0,63	2,32	3,00	2,86	10,62	13,73	95
	1.5+3.5+4.2+5.0	0,95	2,22	2,66	3,17	---	3,46	9,00	9,70	0,65	2,26	3,02	2,99	10,35	13,81	95
	1.5+3.5+4.2+6.0	0,89	2,07	2,49	3,55	---	3,60	9,00	10,68	0,65	2,24	3,71	2,99	10,26	16,99	95
	1.5+3.5+5.0+5.0	0,90	2,10	3,00	3,00	---	3,57	9,00	10,47	0,65	2,25	3,73	2,99	10,30	17,07	95
	1.5+4.2+4.2+4.2	0,96	---	2,68	2,68	2,68	3,45	9,00	9,53	0,65	2,31	3,00	2,99	10,58	13,73	95
	1.5+4.2+4.2+5.0	0,91	---	2,54	2,54	3,02	3,56	9,00	10,29	0,65	2,25	3,69	2,99	10,30	16,90	95
	2.0+2.0+2.0+2.0	1,88	1,88	1,88	1,88	---	2,55	7,50	8,12	0,50	1,63	2,06	2,27	7,46	9,45	95
	2.0+2.0+2.0+2.5	1,88	1,88	1,88	2,35	---	2,63	8,00	8,42	0,50	1,90	2,23	2,27	8,70	10,18	95
	2.0+2.0+2.0+3.5	1,68	1,68	1,68	2,95	---	2,77	8,00	8,96	0,53	1,89	2,51	2,44	8,65	11,49	95
	2.0+2.0+2.0+4.2	1,67	1,67	1,67	3,50	---	2,88	8,50	9,30	0,56	2,33	2,87	2,57	10,67	13,12	95
	2.0+2.0+2.0+5.0	1,64	1,64	1,64	4,09	---	2,99	9,00	9,49	0,56	2,54	2,89	2,57	11,63	13,24	95
	2.0+2.0+2.0+6.0	1,50	1,50	1,50	4,50	---	3,14	9,00	10,01	0,60	2,50	3,01	2,74	11,45	13,77	95
	2.0+2.0+2.0+7.1	1,37	1,37	1,37	4,88	---	3,30	9,00	10,16	0,60	2,48	3,08	2,74	11,36	14,09	95
	2.0+2.0+2.5+2.5	1,73	1,73	2,17	2,17	---	2,70	7,80	8,70	0,53	1,81	2,39	2,44	8,29	10,96	95
	2.0+2.0+2.5+3.5	1,70	1,70	2,13	2,98	---	2,85	8,50	9,21	0,53	2,33	2,87	2,44	10,67	13,12	95
	2.0+2.0+2.5+4.2	1,68	1,68	2,10	3,53	---	2,95	9,00	9,31	0,56	2,61	2,87	2,57	11,95	13,12	95
	2.0+2.0+2.5+5.0	1,57	1,57	1,96	3,91	---	3,07	9,00	9,68	0,59	2,54	3,02	2,69	11,63	13,81	95
	2.0+2.0+2.5+6.0	1,44	1,44	1,80	4,32	---	3,21	9,00	10,14	0,60	2,50	3,08	2,74	11,45	14,09	95
	2.0+2.0+2.5+7.1	1,32	1,32	1,65	4,70	---	3,38	9,00	10,16	0,63	2,47	3,08	2,86	11,31	14,09	95
	2.0+2.0+3.5+3.5	1,64	1,64	2,86	2,86	---	2,99	9,00	9,31	0,56	2,46	2,87	2,57	11,26	13,12	95
	2.0+2.0+3.5+4.2	1,54	1,54	2,69	3,23	---	3,10	9,00	9,51	0,59	2,44	2,99	2,69	11,17	13,69	95
	2.0+2.0+3.5+5.0	1,44	1,44	2,52	3,60	---	3,21	9,00	9,68	0,59	2,38	3,02	2,69	10,90	13,81	95
	2.0+2.0+3.5+6.0	1,33	1,33	2,33	4,00	---	3,36	9,00	10,15	0,63	2,35	3,08	2,86	10,76	14,09	95
	2.0+2.0+3.5+7.1	1,23	1,23	2,16	4,38	---	3,51	9,00	10,17	0,65	2,32	3,08	2,99	10,62	14,09	95
	2.0+2.0+4.2+4.2	1,45	1,45	3,05	3,05	---	3,20	9,00	9,52	0,59	2,43	2,99	2,69	11,13	13,69	95
	2.0+2.0+4.2+5.0	1,36	1,36	2,86	3,41	---	3,32	9,00	9,69	0,63	2,37	3,02	2,86	10,85	13,81	95
	2.0+2.0+4.2+6.0	1,27	1,27	2,66	3,80	---	3,46	9,00	10,16	0,63	2,33	3,08	2,86	10,67	14,09	95
	2.0+2.0+4.2+7.1	1,18	1,18	2,47	4,18	---	3,62	9,00	10,68	0,65	2,31	3,57	2,99	10,58	16,33	95
	2.0+2.0+5.0+5.0	1,29	1,29	3,21	3,21	---	3,43	9,00	9,87	0,63	2,35	3,04	2,86	10,76	13,93	95
	2.0+2.0+5.0+6.0	1,20	1,20	3,00	3,60	---	3,57	9,00	10,66	0,65	2,32	3,45	2,99	10,62	15,80	95
	2.0+2.5+2.5+2.5	1,68	2,11	2,11	2,11	---	2,77	8,00	8,96	0,53	1,89	2,51	2,44	8,65	11,49	95
	2.0+2.5+2.5+3.5	1,66	2,07	2,07	2,90	---	2,92	8,70	9,30	0,56	2,39	2,87	2,57	10,94	13,12	95
	2.0+2.5+2.5+4.2	1,61	2,01	2,01	3,38	---	3,02	9,00	9,50	0,56	2,61	2,99	2,57	11,95	13,69	95
	2.0+2.5+2.5+5.0	1,50	1,88	1,88	3,75	---	3,14	9,00	9,68	0,59	2,54	3,02	2,69	11,63	13,81	95
	2.0+2.5+2.5+6.0	1,38	1,73	1,73	4,15	---	3,29	9,00	10,14	0,60	2,50	3,08	2,74	11,45	14,09	95
	2.0+2.5+2.5+7.1	1,28	1,60	1,60	4,53	---	3,45	9,00	10,16	0,63	2,47	3,08	2,86	11,31	14,09	95

Notes

- 1.The total capacity of each connected indoor unit is up to ·15.3·kW.
- 2.The values above are for connecting with the following indoor unit types:
·1.5.2.0.2.5.3.5.4.2.5.0.6.0.7.1· kW class
Wall-mounted ·FTXM-M, FTXM-N, FTXM-R· series
3. These indoor units can only be used in a multi-unit setup.
4. Cooling capacity conditions
Indoor temperature ·27·°C DB / ·19·°C WB
Outdoor temperature ·35·°C DB

3D105429A

4 Combination table

4 - 1 Combination Table

5MXM-N9

Cooling · (50Hz 230V)·

Outdoor unit	Indoor unit	Cooling capacity [kW]					Total capacity [kW]			Power input [kW]			Total current [A]			Power factor [%]
		Room · A ·	Room · B ·	Room · C ·	Room · D ·	Room · E ·	Min.	Nom.	Max.	Min.	Nom.	Max.	Min.	Nom.	Max.	
5MXM90N2V1B 5MXM90N2V1B9	2.0+2.5+3.5+3.5	1,57	1,96	2,74	2,74	---	3,07	9,00	9,50	0,59	2,46	2,99	2,69	11,26	13,69	95
	2.0+2.5+3.5+4.2	1,48	1,84	2,58	3,10	---	3,17	9,00	9,51	0,59	2,44	2,99	2,69	11,17	13,69	95
	2.0+2.5+3.5+5.0	1,38	1,73	2,42	3,46	---	3,29	9,00	9,68	0,63	2,38	3,02	2,86	10,90	13,81	95
	2.0+2.5+3.5+6.0	1,29	1,61	2,25	3,86	---	3,43	9,00	10,15	0,63	2,35	3,08	2,86	10,76	14,09	95
	2.0+2.5+3.5+7.1	1,19	1,49	2,09	4,23	---	3,59	9,00	10,63	0,65	2,32	3,57	2,99	10,62	16,33	95
	2.0+2.5+4.2+4.2	1,40	1,74	2,93	2,93	---	3,27	9,00	9,52	0,63	2,43	2,99	2,86	11,13	13,69	95
	2.0+2.5+4.2+5.0	1,31	1,64	2,76	3,28	---	3,39	9,00	9,69	0,63	2,37	3,02	2,86	10,85	13,81	95
	2.0+2.5+4.2+6.0	1,22	1,53	2,57	3,67	---	3,53	9,00	10,62	0,65	2,33	3,56	2,99	10,67	16,29	95
	2.0+2.5+5.0+5.0	1,24	1,55	3,10	3,10	---	3,50	9,00	9,87	0,65	2,35	3,04	2,99	10,76	13,93	95
	2.0+2.5+5.0+6.0	1,16	1,45	2,90	3,48	---	3,65	9,00	10,70	0,65	2,32	3,52	2,99	10,62	16,13	95
	2.0+3.5+3.5+3.5	1,44	2,52	2,52	2,52	---	3,21	9,00	9,51	0,63	2,43	2,99	2,86	11,13	13,69	95
	2.0+3.5+3.5+4.2	1,36	2,39	2,39	2,86	---	3,32	9,00	9,52	0,63	2,42	2,99	2,86	11,08	13,69	95
	2.0+3.5+3.5+5.0	1,29	2,25	2,25	3,21	---	3,43	9,00	9,69	0,65	2,35	3,02	2,99	10,76	13,81	95
	2.0+3.5+3.5+6.0	1,20	2,10	2,10	3,60	---	3,57	9,00	10,61	0,65	2,32	3,57	2,99	10,62	16,33	95
	2.0+3.5+4.2+4.2	1,29	2,27	2,72	2,72	---	3,42	9,00	9,52	0,65	2,40	3,00	2,99	10,99	13,73	95
	2.0+3.5+4.2+5.0	1,22	2,14	2,57	3,06	---	3,53	9,00	10,20	0,65	2,34	3,55	2,99	10,71	16,25	95
	2.0+3.5+5.0+5.0	1,16	2,03	2,90	2,90	---	3,65	9,00	10,47	0,69	2,34	3,73	3,16	10,71	17,07	95
	2.0+4.2+4.2+4.2	1,23	---	2,59	2,59	2,59	3,51	9,00	9,53	0,65	2,39	3,00	2,99	10,94	13,73	95
	2.0+4.2+4.2+5.0	1,17	---	2,45	2,45	2,92	3,63	9,00	10,21	0,69	2,33	3,55	3,16	10,67	16,25	95
	2.5+2.5+2.5+2.5	2,13	2,13	2,13	2,13	---	2,85	8,50	9,21	0,53	2,28	2,87	2,44	10,44	13,12	95
	2.5+2.5+2.5+3.5	2,05	2,05	2,05	2,86	---	2,99	9,00	9,30	0,56	2,48	2,87	2,57	11,36	13,12	95
	2.5+2.5+2.5+4.2	1,92	1,92	1,92	3,23	---	3,10	9,00	9,50	0,59	2,47	2,99	2,69	11,31	13,69	95
	2.5+2.5+2.5+5.0	1,80	1,80	1,80	3,60	---	3,21	9,00	9,68	0,59	2,40	3,02	2,69	10,99	13,81	95
	2.5+2.5+2.5+6.0	1,67	1,67	1,67	4,00	---	3,36	9,00	10,14	0,63	2,37	3,08	2,86	10,85	14,09	95
	2.5+2.5+2.5+7.1	1,54	1,54	1,54	4,38	---	3,51	9,00	10,16	0,65	2,34	3,08	2,99	10,71	14,09	95
	2.5+2.5+3.5+3.5	1,88	1,88	2,63	2,63	---	3,14	9,00	9,50	0,59	2,47	2,99	2,69	11,31	13,69	95
	2.5+2.5+3.5+4.2	1,77	1,77	2,48	2,98	---	3,24	9,00	9,51	0,63	2,46	2,99	2,86	11,26	13,69	95
	2.5+2.5+3.5+5.0	1,67	1,67	2,33	3,33	---	3,36	9,00	9,68	0,63	2,39	3,02	2,86	10,94	13,81	95
	2.5+2.5+3.5+6.0	1,55	1,55	2,17	3,72	---	3,50	9,00	10,15	0,65	2,36	3,08	2,99	10,81	14,09	95
	2.5+2.5+3.5+7.1	1,44	1,44	2,02	4,10	---	3,66	9,00	10,63	0,65	2,33	3,57	2,99	10,67	16,33	95
	2.5+2.5+4.2+4.2	1,68	1,68	2,82	2,82	---	3,35	9,00	9,52	0,63	2,44	2,99	2,86	11,17	13,69	95
	2.5+2.5+4.2+5.0	1,58	1,58	2,66	3,17	---	3,46	9,00	9,69	0,65	2,38	3,02	2,99	10,90	13,81	95
	2.5+2.5+4.2+6.0	1,48	1,48	2,49	3,55	---	3,60	9,00	10,68	0,65	2,35	3,56	2,99	10,76	16,29	95
	2.5+2.5+5.0+5.0	1,50	1,50	3,00	3,00	---	3,57	9,00	10,46	0,65	2,37	3,72	2,99	10,85	17,03	95
	2.5+3.5+3.5+3.5	1,73	2,42	2,42	2,42	---	3,29	9,00	9,53	0,63	2,46	2,99	2,86	11,26	13,69	95
	2.5+3.5+3.5+4.2	1,64	2,30	2,30	2,76	---	3,39	9,00	9,52	0,65	2,44	2,99	2,99	11,17	13,69	95
	2.5+3.5+3.5+5.0	1,55	2,17	2,17	3,10	---	3,50	9,00	9,69	0,65	2,38	3,02	2,99	10,90	13,81	95
	2.5+3.5+3.5+6.0	1,45	2,03	2,03	3,48	---	3,65	9,00	10,61	0,65	2,35	3,57	2,99	10,76	16,33	95
	2.5+3.5+4.2+4.2	1,56	2,19	2,63	2,63	---	3,48	9,00	9,52	0,65	2,43	3,00	2,99	11,13	13,73	95
	2.5+3.5+4.2+5.0	1,48	2,07	2,49	2,96	---	3,60	9,00	10,20	0,69	2,37	3,55	3,16	10,85	16,25	95
	2.5+4.2+4.2+4.2	1,56	2,19	2,63	2,63	---	3,59	9,00	10,03	0,69	2,42	3,52	3,16	11,08	16,09	95
	3.5+3.5+3.5+3.5	2,25	2,25	2,25	2,25	---	3,43	9,00	9,51	0,65	2,44	2,99	2,99	11,17	13,69	95
	3.5+3.5+3.5+4.2	2,14	2,14	2,14	2,57	---	3,53	9,00	10,02	0,69	2,43	3,52	3,16	11,13	16,09	95
	3.5+3.5+3.5+5.0	2,03	2,03	2,03	2,90	---	3,65	9,00	10,15	0,69	2,37	3,48	3,16	10,85	15,93	95

Notes

1. The total capacity of each connected indoor unit is up to ·15.5·kW.
2. The values above are for connecting with the following indoor unit types:
·2.0,2.5,3.5,4.2,5.0,6.0,7.1· kW class
Wall-mounted ·FTXM-M, FTXM-N, FTXM-R· series
3. These indoor units can only be used in a multi-unit setup.
4. Cooling capacity conditions

Indoor temperature ·27·°C DB / ·19·°C WB

Outdoor temperature ·35·°C DB

3D105430A

4 Combination table

4 - 1 Combination Table

5MXM-N9

Cooling · (50Hz 230V)·

Outdoor unit	Indoor unit	Cooling capacity [kW]					Total capacity [kW]			Power input [kW]			Total current [A]			Power factor [%]
		Room ·A·	Room ·B·	Room ·C·	Room ·D·	Room ·E·	Min.	Nom.	Max.	Min.	Nom.	Max.	Min.	Nom.	Max.	
5MXM90N2V1B 5MXM90N2V1B9	3.5+3.5+4.2+4.2	2,05	2,05	2,45	2,45	---	3,63	9,00	10,03	0,69	2,42	3,52	3,16	11,08	16,09	95
	1.5+1.5+1.5+1.5+1.5	1,50	1,50	1,50	1,50	1,50	2,48	7,50	7,79	0,48	1,55	1,79	2,19	7,10	8,19	95
	1.5+1.5+1.5+1.5+2.0	1,41	1,41	1,41	1,41	1,88	2,55	7,50	8,12	0,48	1,55	1,94	2,19	7,10	8,88	95
	1.5+1.5+1.5+1.5+2.5	1,41	1,41	1,41	1,41	2,35	2,63	8,00	8,42	0,51	1,75	2,10	2,32	8,01	9,61	95
	1.5+1.5+1.5+1.5+3.5	1,26	1,26	1,26	1,26	2,95	2,77	8,00	8,96	0,53	1,73	2,39	2,44	7,92	10,92	95
	1.5+1.5+1.5+1.5+4.2	1,32	1,32	1,32	1,32	3,71	2,88	9,00	9,30	0,53	2,20	2,56	2,44	10,07	11,73	95
	1.5+1.5+1.5+1.5+5.0	1,23	1,23	1,23	1,23	4,09	2,99	9,00	9,64	0,56	2,15	2,64	2,57	9,84	12,10	95
	1.5+1.5+1.5+1.5+6.0	1,13	1,13	1,13	1,13	4,50	3,14	9,00	10,01	0,57	2,12	2,69	2,61	9,71	12,30	95
	1.5+1.5+1.5+1.5+7.1	1,03	1,03	1,03	1,03	4,88	3,30	9,00	10,32	0,60	2,10	2,82	2,74	9,62	12,91	95
	1.5+1.5+1.5+2.0+2.0	1,41	1,41	1,41	1,88	1,88	2,63	8,00	8,42	0,51	1,75	2,10	2,32	8,01	9,61	95
	1.5+1.5+1.5+2.0+2.5	1,33	1,33	1,33	1,78	2,22	2,70	8,00	8,70	0,51	1,75	2,22	2,32	8,01	10,14	95
	1.5+1.5+1.5+2.0+3.5	1,28	1,28	1,28	1,70	2,98	2,85	8,50	9,21	0,53	1,95	2,50	2,44	8,93	11,45	95
	1.5+1.5+1.5+2.0+4.2	1,26	1,26	1,26	1,68	3,53	2,95	9,00	9,52	0,53	2,06	2,69	2,44	9,43	12,30	95
	1.5+1.5+1.5+2.0+5.0	1,17	1,17	1,17	1,57	3,91	3,07	9,00	9,83	0,56	2,02	2,78	2,57	9,25	12,71	95
	1.5+1.5+1.5+2.0+6.0	1,08	1,08	1,08	1,44	4,32	3,21	9,00	10,16	0,57	2,00	2,75	2,61	9,16	12,59	95
	1.5+1.5+1.5+2.0+7.1	0,99	0,99	0,99	1,32	4,70	3,38	9,00	10,43	0,60	1,97	2,96	2,74	9,02	13,56	95
	1.5+1.5+1.5+2.5+2.5	1,26	1,26	1,26	2,11	2,11	2,77	8,00	8,96	0,53	1,74	2,39	2,44	7,97	10,92	95
	1.5+1.5+1.5+2.5+3.5	1,24	1,24	1,24	2,07	2,90	2,92	8,70	9,44	0,53	2,06	2,63	2,44	9,43	12,02	95
	1.5+1.5+1.5+2.5+4.2	1,21	1,21	1,21	2,01	3,38	3,02	9,00	9,72	0,56	2,19	2,82	2,57	10,03	12,91	95
	1.5+1.5+1.5+2.5+5.0	1,13	1,13	1,13	1,88	3,75	3,14	9,00	10,01	0,56	2,14	2,90	2,57	9,80	13,28	95
	1.5+1.5+1.5+2.5+6.0	1,04	1,04	1,04	1,73	4,15	3,29	9,00	10,29	0,60	2,11	2,82	2,74	9,66	12,91	95
	1.5+1.5+1.5+2.5+7.1	0,96	0,96	0,96	1,60	4,53	3,45	9,00	10,53	0,60	2,09	2,96	2,74	9,57	13,56	95
	1.5+1.5+1.5+3.5+3.5	1,17	1,17	1,17	2,74	2,74	3,07	9,00	9,83	0,56	2,18	2,88	2,57	9,98	13,20	95
	1.5+1.5+1.5+3.5+4.2	1,11	1,11	1,11	2,58	3,10	3,17	9,00	10,07	0,60	2,17	3,02	2,74	9,94	13,81	95
	1.5+1.5+1.5+3.5+5.0	1,04	1,04	1,04	2,42	3,46	3,29	9,00	10,29	0,60	2,12	3,11	2,74	9,71	14,22	95
	1.5+1.5+1.5+3.5+6.0	0,96	0,96	0,96	2,25	3,86	3,43	9,00	10,52	0,60	2,09	2,95	2,74	9,57	13,52	95
	1.5+1.5+1.5+3.5+7.1	0,89	0,89	0,89	2,09	4,23	3,59	9,00	10,67	0,63	2,07	3,10	2,86	9,48	14,17	95
	1.5+1.5+1.5+4.2+4.2	1,05	1,05	1,05	2,93	2,93	3,27	9,00	10,19	0,60	2,16	3,09	2,74	9,89	14,13	95
	1.5+1.5+1.5+4.2+5.0	0,99	0,99	0,99	2,76	3,28	3,39	9,00	10,36	0,63	2,11	3,11	2,86	9,66	14,22	95
	1.5+1.5+1.5+4.2+6.0	0,92	0,92	0,92	2,57	3,67	3,53	9,00	10,62	0,63	2,08	3,03	2,86	9,52	13,85	95
	1.5+1.5+1.5+5.0+5.0	0,93	0,93	0,93	3,10	3,10	3,50	9,00	10,55	0,63	2,10	3,13	2,86	9,62	14,34	95
	1.5+1.5+1.5+5.0+6.0	0,87	0,87	0,87	2,90	3,48	3,65	9,00	10,70	0,63	2,07	2,98	2,86	9,48	13,65	95
	1.5+1.5+2.0+2.0+2.0	1,30	1,30	1,73	1,73	1,73	2,70	7,80	8,70	0,51	1,65	2,22	2,32	7,56	10,14	95
	1.5+1.5+2.0+2.0+2.5	1,26	1,26	1,68	1,68	2,11	2,77	8,00	8,96	0,53	1,74	2,39	2,44	7,97	10,92	95
	1.5+1.5+2.0+2.0+3.5	1,24	1,24	1,66	1,66	2,90	2,92	8,70	9,44	0,53	2,05	2,63	2,44	9,39	12,02	95
	1.5+1.5+2.0+2.0+4.2	1,21	1,21	1,61	1,61	3,38	3,02	9,00	9,72	0,56	2,18	2,82	2,57	9,98	12,91	95
	1.5+1.5+2.0+2.0+5.0	1,13	1,13	1,50	1,50	3,75	3,14	9,00	10,01	0,56	2,13	2,90	2,57	9,75	13,28	95
	1.5+1.5+2.0+2.0+6.0	1,04	1,04	1,38	1,38	4,15	3,29	9,00	10,29	0,60	2,10	2,82	2,74	9,62	12,91	95
	1.5+1.5+2.0+2.0+7.1	0,96	0,96	1,28	1,28	4,53	3,45	9,00	10,53	0,60	2,08	2,96	2,74	9,52	13,56	95
	1.5+1.5+2.0+2.5+2.5	1,28	1,28	1,70	2,13	2,13	2,85	8,50	9,21	0,53	1,84	2,50	2,44	8,43	11,45	95
	1.5+1.5+2.0+2.5+3.5	1,23	1,23	1,64	2,05	2,86	2,99	9,00	9,64	0,56	2,18	2,75	2,57	9,98	12,59	95
	1.5+1.5+2.0+2.5+4.2	1,15	1,15	1,54	1,92	3,23	3,10	9,00	9,90	0,56	2,17	2,95	2,57	9,94	13,48	95
	1.5+1.5+2.0+2.5+5.0	1,08	1,08	1,44	1,80	3,60	3,21	9,00	10,16	0,60	2,12	3,03	2,74	9,71	13,89	95
	1.5+1.5+2.0+2.5+6.0	1,00	1,00	1,33	1,67	4,00	3,36	9,00	10,41	0,60	2,09	2,95	2,74	9,57	13,52	95

Notes

1. The total capacity of each connected indoor unit is up to ·15.5·kW.
2. The values above are for connecting with the following indoor unit types:
·2.0,2.5,3.5,4.2,5.0,6.0,7.1· kW class
Wall-mounted ·FTXM-M, FTXM-N, FTXM-R· series
3. These indoor units can only be used in a multi-unit setup.
4. Cooling capacity conditions
Indoor temperature ·27·°C DB / ·19·°C WB
Outdoor temperature ·35·°C DB

3D105431A

4 Combination table

4 - 1 Combination Table

5MXM-N9

Cooling (50Hz 230V)·

Outdoor unit	Indoor unit	Cooling capacity [kW]					Total capacity [kW]			Power input [kW]			Total current [A]			Power factor [%]
		Room ·A·	Room ·B·	Room ·C·	Room ·D·	Room ·E·	Min.	Nom.	Max.	Min.	Nom.	Max.	Min.	Nom.	Max.	
5MXM90N2V1B 5MXM90N2V1B9	1.5+1.5+2.0+2.5+7.1	0,92	0,92	1,23	1,54	4,38	3,51	9,00	10,61	0,63	2,07	3,03	2,86	9,48	13,85	95
	1.5+1.5+2.0+3.5+3.5	1,13	1,13	1,50	2,63	2,63	3,14	9,00	10,01	0,56	2,17	3,02	2,57	9,94	13,81	95
	1.5+1.5+2.0+3.5+4.2	1,06	1,06	1,42	2,48	2,98	3,24	9,00	10,18	0,60	2,16	3,08	2,74	9,89	14,09	95
	1.5+1.5+2.0+3.5+5.0	1,00	1,00	1,33	2,33	3,33	3,36	9,00	10,36	0,60	2,11	3,11	2,74	9,66	14,22	95
	1.5+1.5+2.0+3.5+6.0	0,93	0,93	1,24	2,17	3,72	3,50	9,00	10,59	0,63	2,08	3,03	2,86	9,52	13,85	95
	1.5+1.5+2.0+3.5+7.1	0,87	0,87	1,15	2,02	4,10	3,66	9,00	10,71	0,65	2,06	3,10	2,99	9,43	14,17	95
	1.5+1.5+2.0+4.2+2.2	1,01	1,01	1,34	2,82	2,82	3,35	9,00	10,19	0,63	2,15	3,09	2,86	9,84	14,13	95
	1.5+1.5+2.0+4.2+5.0	0,95	0,95	1,27	2,66	3,17	3,46	9,00	10,36	0,63	2,10	3,11	2,86	9,62	14,22	95
	1.5+1.5+2.0+4.2+6.0	0,89	0,89	1,18	2,49	3,55	3,60	9,00	10,68	0,63	2,07	3,10	2,86	9,48	14,17	95
	1.5+1.5+2.0+5.0+5.0	0,90	0,90	1,20	3,00	3,00	3,57	9,00	10,66	0,63	2,00	3,28	2,86	9,16	14,99	95
	1.5+1.5+2.5+2.5+2.5	1,24	1,24	2,07	2,07	2,07	2,92	8,70	9,44	0,53	2,04	2,63	2,44	9,34	12,02	95
	1.5+1.5+2.5+2.5+3.5	1,17	1,17	1,96	1,96	2,74	3,07	9,00	9,83	0,56	2,17	2,88	2,57	9,94	13,20	95
	1.5+1.5+2.5+2.5+4.2	1,11	1,11	1,84	1,84	3,10	3,17	9,00	10,07	0,60	2,16	3,02	2,74	9,89	13,81	95
	1.5+1.5+2.5+2.5+5.0	1,04	1,04	1,73	1,73	3,46	3,29	9,00	10,29	0,60	2,11	3,11	2,74	9,66	14,22	95
	1.5+1.5+2.5+2.5+6.0	0,96	0,96	1,61	1,61	3,86	3,43	9,00	10,52	0,60	2,08	3,03	2,74	9,52	13,85	95
	1.5+1.5+2.5+2.5+7.1	0,89	0,89	1,49	1,49	4,23	3,59	9,00	10,67	0,63	2,06	3,10	2,86	9,43	14,17	95
	1.5+1.5+2.5+3.5+3.5	1,08	1,08	1,80	2,52	2,52	3,21	9,00	10,16	0,60	2,16	3,08	2,74	9,89	14,09	95
	1.5+1.5+2.5+3.5+4.2	1,02	1,02	1,70	2,39	2,86	3,32	9,00	10,18	0,60	2,15	3,08	2,74	9,84	14,09	95
	1.5+1.5+2.5+3.5+5.0	0,96	0,96	1,61	2,25	3,21	3,43	9,00	10,36	0,63	2,10	3,11	2,86	9,62	14,22	95
	1.5+1.5+2.5+3.5+6.0	0,90	0,90	1,50	2,10	3,60	3,57	9,00	10,66	0,63	2,07	3,10	2,86	9,48	14,17	95
	1.5+1.5+2.5+4.2+4.2	0,97	0,97	1,62	2,72	2,72	3,42	9,00	10,19	0,63	2,14	3,09	2,86	9,80	14,13	95
	1.5+1.5+2.5+4.2+5.0	0,92	0,92	1,53	2,57	3,06	3,53	9,00	10,62	0,63	2,09	3,39	2,86	9,57	15,52	95
	1.5+1.5+2.5+5.0+5.0	0,87	0,87	1,45	2,90	2,90	3,65	9,00	10,70	0,65	2,02	3,28	2,99	9,25	14,99	95
	1.5+1.5+3.5+3.5+3.5	1,00	1,00	2,33	2,33	2,33	3,36	9,00	10,18	0,63	2,15	3,08	2,86	9,84	14,09	95
	1.5+1.5+3.5+3.5+4.2	0,95	0,95	2,22	2,22	2,66	3,46	9,00	10,19	0,63	2,14	3,09	2,86	9,80	14,13	95
	1.5+1.5+3.5+3.5+5.0	0,90	0,90	2,10	2,10	3,00	3,57	9,00	10,66	0,65	2,09	3,38	2,99	9,57	15,48	95
	1.5+1.5+3.5+4.2+4.2	0,91	0,91	2,11	2,54	2,54	3,56	9,00	10,65	0,65	2,13	3,57	2,99	9,75	16,33	95
	1.5+2.0+2.0+2.0+2.0	1,26	1,68	1,68	1,68	1,68	2,77	8,00	8,96	0,53	1,73	2,39	2,44	7,92	10,92	95
	1.5+2.0+2.0+2.0+2.5	1,28	1,70	1,70	1,70	2,13	2,85	8,50	9,21	0,53	1,83	2,50	2,44	8,38	11,45	95
	1.5+2.0+2.0+2.0+3.5	1,23	1,64	1,64	1,64	2,86	2,99	9,00	9,64	0,56	2,17	2,75	2,57	9,94	12,59	95
	1.5+2.0+2.0+2.0+4.2	1,15	1,54	1,54	1,54	3,23	3,10	9,00	9,90	0,56	2,16	2,95	2,57	9,89	13,48	95
	1.5+2.0+2.0+2.0+5.0	1,08	1,44	1,44	1,44	3,60	3,21	9,00	10,16	0,60	2,11	3,03	2,74	9,66	13,89	95
	1.5+2.0+2.0+2.0+6.0	1,00	1,33	1,33	1,33	4,00	3,36	9,00	10,41	0,60	2,08	2,95	2,74	9,52	13,52	95
	1.5+2.0+2.0+2.0+7.1	0,92	1,23	1,23	1,23	4,38	3,51	9,00	10,61	0,63	2,06	3,03	2,86	9,43	13,85	95
	1.5+2.0+2.0+2.5+2.5	1,24	1,66	1,66	2,07	2,07	2,92	8,70	9,44	0,53	1,87	2,63	2,44	8,56	12,02	95
	1.5+2.0+2.0+2.5+3.5	1,17	1,57	1,57	1,96	2,74	3,07	9,00	9,83	0,56	1,92	2,88	2,57	8,79	13,20	95
	1.5+2.0+2.0+2.5+4.2	1,11	1,48	1,48	1,84	3,10	3,17	9,00	10,07	0,60	1,91	3,02	2,74	8,75	13,81	95
	1.5+2.0+2.0+2.5+5.0	1,04	1,38	1,38	1,73	3,46	3,29	9,00	10,29	0,60	1,87	3,11	2,74	8,56	14,22	95
	1.5+2.0+2.0+2.5+6.0	0,96	1,29	1,29	1,61	3,86	3,43	9,00	10,52	0,60	1,85	3,03	2,74	8,47	13,85	95
	1.5+2.0+2.0+2.5+7.1	0,89	1,19	1,19	1,49	4,23	3,59	9,00	10,67	0,63	1,83	3,10	2,86	8,38	14,17	95
	1.5+2.0+2.0+3.5+3.5	1,08	1,44	1,44	2,52	2,52	3,21	9,00	10,16	0,60	1,91	3,08	2,74	8,75	14,09	95
	1.5+2.0+2.0+3.5+4.2	1,02	1,36	1,36	2,39	2,86	3,32	9,00	10,18	0,60	1,90	3,08	2,74	8,70	14,09	95
	1.5+2.0+2.0+3.5+5.0	0,96	1,29	1,29	2,25	3,21	3,43	9,00	10,36	0,63	1,86	3,11	2,86	8,52	14,22	95
	1.5+2.0+2.0+3.5+6.0	0,90	1,20	1,20	2,10	3,60	3,57	9,00	10,66	0,63	1,84	3,10	2,86	8,43	14,17	95

Notes

- 1.The total capacity of each connected indoor unit is up to ·15.5·kW.
- 2.The values above are for connecting with the following indoor unit types:
·1.5,2.0,2.5,3.5,4.2,5.0,6.0,7.1· kW class
Wall-mounted ·FTXM-M, FTXM-N, FTXM-R· series
- 3.These indoor units can only be used in a multi-unit setup.
4. Cooling capacity conditions
Indoor temperature ·27·°C DB / ·19·°C WB
Outdoor temperature ·35·°C DB

3D105432A

4 Combination table

4 - 1 Combination Table

5MXM-N9

Cooling (50Hz 230V)

Outdoor unit	Indoor unit	Cooling capacity [kW]					Total capacity [kW]			Power input [kW]			Total current [A]			Power factor [%]
		Room ·A·	Room ·B·	Room ·C·	Room ·D·	Room ·E·	Min.	Nom.	Max.	Min.	Nom.	Max.	Min.	Nom.	Max.	
5MXM90N2V1B 5MXM90N2V1B9	1.5+2.0+2.0+4.2+4.2	0.97	1.29	1.29	2.72	2.72	3.42	9.00	10.19	0.63	1.89	3.09	2.86	8.65	14.13	95
	1.5+2.0+2.0+4.2+5.0	0.92	1.22	1.22	2.57	3.06	3.53	9.00	10.62	0.63	1.85	3.39	2.86	8.47	15.52	95
	1.5+2.0+2.0+5.0+5.0	0.87	1.16	1.16	2.90	2.90	3.65	9.00	10.70	0.65	1.85	3.28	2.99	8.47	14.99	95
	1.5+2.0+2.5+2.5+2.5	1.23	1.64	2.05	2.05	2.05	2.99	9.00	9.64	0.56	1.92	2.75	2.57	8.79	12.59	95
	1.5+2.0+2.5+2.5+3.5	1.13	1.50	1.88	1.88	2.63	3.14	9.00	10.01	0.56	1.90	3.02	2.57	8.70	13.81	95
	1.5+2.0+2.5+2.5+4.2	1.06	1.42	1.77	1.77	2.98	3.24	9.00	10.17	0.60	1.89	3.08	2.74	8.65	14.09	95
	1.5+2.0+2.5+2.5+5.0	1.00	1.33	1.67	1.67	3.33	3.36	9.00	10.35	0.60	1.85	3.11	2.74	8.47	14.22	95
	1.5+2.0+2.5+2.5+6.0	0.93	1.24	1.55	1.55	3.72	3.50	9.00	10.59	0.63	1.83	3.03	2.86	8.38	13.85	95
	1.5+2.0+2.5+2.5+7.1	0.87	1.15	1.44	1.44	4.10	3.66	9.00	10.71	0.65	1.82	3.10	2.99	8.33	14.17	95
	1.5+2.0+2.5+3.5+3.5	1.04	1.38	1.73	2.42	2.42	3.29	9.00	10.17	0.60	1.89	3.08	2.74	8.65	14.09	95
	1.5+2.0+2.5+3.5+4.2	0.99	1.31	1.64	2.30	2.76	3.39	9.00	10.18	0.63	1.88	3.08	2.86	8.61	14.09	95
	1.5+2.0+2.5+3.5+5.0	0.93	1.24	1.55	2.17	3.10	3.50	9.00	10.36	0.63	1.85	3.11	2.86	8.47	14.22	95
	1.5+2.0+2.5+3.5+6.0	0.87	1.16	1.45	2.03	3.48	3.65	9.00	10.70	0.65	1.83	3.10	2.99	8.38	14.17	95
	1.5+2.0+2.5+4.2+4.2	0.94	1.25	1.56	2.63	2.63	3.48	9.00	10.19	0.63	1.88	3.09	2.86	8.61	14.13	95
	1.5+2.0+2.5+4.2+5.0	0.89	1.18	1.48	2.49	2.96	3.60	9.00	10.68	0.65	1.84	3.46	2.99	8.43	15.84	95
	1.5+2.0+3.5+3.5+3.5	0.96	1.29	2.25	2.25	2.25	3.43	9.00	10.18	0.63	1.88	3.08	2.86	8.61	14.09	95
	1.5+2.0+3.5+3.5+4.2	0.92	1.22	2.14	2.14	2.57	3.53	9.00	10.62	0.65	1.88	3.57	2.99	8.61	16.33	95
	1.5+2.0+3.5+3.5+5.0	0.87	1.16	2.03	2.03	2.90	3.65	9.00	10.70	0.65	1.84	3.45	2.99	8.43	15.80	95
	1.5+2.0+3.5+4.2+4.2	0.88	1.17	2.05	2.45	2.45	3.63	9.00	10.69	0.65	1.87	3.64	2.99	8.56	16.66	95
	1.5+2.5+2.5+2.5+2.5	1.17	1.96	1.96	1.96	1.96	3.07	9.00	9.83	0.56	1.91	2.88	2.57	8.75	13.20	95
	1.5+2.5+2.5+2.5+3.5	1.08	1.80	1.80	1.80	2.52	3.21	9.00	10.16	0.60	1.89	3.08	2.74	8.65	14.09	95
	1.5+2.5+2.5+2.5+4.2	1.02	1.70	1.70	1.70	2.86	3.32	9.00	10.17	0.60	1.88	3.08	2.74	8.61	14.09	95
	1.5+2.5+2.5+2.5+5.0	0.96	1.61	1.61	1.61	3.21	3.43	9.00	10.35	0.63	1.85	3.11	2.86	8.47	14.22	95
	1.5+2.5+2.5+2.5+6.0	0.90	1.50	1.50	1.50	3.60	3.57	9.00	10.66	0.63	1.83	3.10	2.86	8.38	14.17	95
	1.5+2.5+2.5+3.5+3.5	1.00	1.67	1.67	2.33	2.33	3.36	9.00	10.17	0.63	1.88	3.08	2.86	8.61	14.09	95
	1.5+2.5+2.5+3.5+4.2	0.95	1.58	1.58	2.22	2.66	3.46	9.00	10.18	0.63	1.88	3.08	2.86	8.61	14.09	95
	1.5+2.5+2.5+3.5+5.0	0.90	1.50	1.50	2.10	3.00	3.57	9.00	10.66	0.65	1.84	3.38	2.99	8.43	15.48	95
	1.5+2.5+2.5+4.2+4.2	0.91	1.51	1.51	2.54	2.54	3.56	9.00	10.65	0.65	1.87	3.64	2.99	8.56	16.66	95
	1.5+2.5+3.5+3.5+3.5	0.93	1.55	2.17	2.17	2.17	3.50	9.00	10.18	0.63	1.88	3.08	2.86	8.61	14.09	95
	1.5+2.5+3.5+3.5+4.2	0.89	1.48	2.07	2.07	2.49	3.60	9.00	10.68	0.65	1.87	3.64	2.99	8.56	16.66	95
	1.5+3.5+3.5+3.5+3.5	0.87	2.03	2.03	2.03	2.03	3.65	9.00	10.70	0.65	1.87	3.71	2.99	8.56	16.99	95
	2.0+2.0+2.0+2.0+2.0	1.70	1.70	1.70	1.70	1.70	2.85	8.50	9.21	0.53	1.83	2.50	2.44	8.38	11.45	95
	2.0+2.0+2.0+2.0+2.5	1.66	1.66	1.66	1.66	2.07	2.92	8.70	9.44	0.53	2.03	2.63	2.44	9.30	12.02	95
	2.0+2.0+2.0+2.0+3.5	1.57	1.57	1.57	1.57	2.74	3.07	9.00	9.83	0.56	1.90	2.88	2.57	8.70	13.20	95
	2.0+2.0+2.0+2.0+4.2	1.48	1.48	1.48	1.48	3.10	3.17	9.00	10.07	0.60	1.89	3.02	2.74	8.65	13.81	95
	2.0+2.0+2.0+2.0+5.0	1.38	1.38	1.38	1.38	3.46	3.29	9.00	10.29	0.60	1.85	3.11	2.74	8.47	14.22	95
	2.0+2.0+2.0+2.0+6.0	1.29	1.29	1.29	1.29	3.86	3.43	9.00	10.52	0.60	1.83	3.03	2.74	8.38	13.85	95
	2.0+2.0+2.0+2.0+7.1	1.19	1.19	1.19	1.19	4.23	3.59	9.00	10.67	0.63	1.82	3.10	2.86	8.33	14.17	95
	2.0+2.0+2.0+2.5+2.5	1.64	1.64	1.64	2.05	2.05	2.99	9.00	9.64	0.56	2.09	2.75	2.57	9.57	12.59	95
	2.0+2.0+2.0+2.5+3.5	1.50	1.50	1.50	1.88	2.63	3.14	9.00	10.01	0.56	2.07	3.02	2.57	9.48	13.81	95
	2.0+2.0+2.0+2.5+4.2	1.42	1.42	1.42	1.77	2.98	3.24	9.00	10.17	0.60	2.06	3.08	2.74	9.43	14.09	95
	2.0+2.0+2.0+2.5+5.0	1.33	1.33	1.33	1.67	3.33	3.36	9.00	10.35	0.60	2.01	3.11	2.74	9.20	14.22	95
	2.0+2.0+2.0+2.5+6.0	1.24	1.24	1.24	1.55	3.72	3.50	9.00	10.59	0.63	1.99	3.03	2.86	9.11	13.85	95
	2.0+2.0+2.0+2.5+7.1	1.15	1.15	1.15	1.44	4.10	3.66	9.00	10.71	0.65	1.97	3.10	2.99	9.02	14.17	95

Notes

1. The total capacity of each connected indoor unit is up to ·15.6·kW.
2. The values above are for connecting with the following indoor unit types:
·1.5.2.0.2.5.3.5.4.2.5.0.6.0.7.1· kW class
Wall-mounted ·FTXM-M, FTXM-N, FTXM-R· series
3. These indoor units can only be used in a multi-unit setup.
4. Cooling capacity conditions
Indoor temperature ·27·°C DB / ·19·°C WB
Outdoor temperature ·35·°C DB

3D105433A

4 Combination table

4 - 1 Combination Table

5MXM-N9

Cooling ·(50Hz 230V)·

Outdoor unit	Indoor unit	Cooling capacity [kW]					Total capacity [kW]			Power input [kW]			Total current [A]			Power factor [%]
		Room ·A·	Room ·B·	Room ·C·	Room ·D·	Room ·E·	Min.	Nom.	Max.	Min.	Nom.	Max.	Min.	Nom.	Max.	
5MXM90N2V1B 5MXM90N2V1B9	2.0+2.0+2.0+3.5+3.5	1,38	1,38	1,38	2,42	2,42	2,99	9,00	9,64	0,56	2,06	2,75	2,57	9,43	12,59	95
	2.0+2.0+2.0+3.5+4.2	1,31	1,31	1,31	2,30	2,76	3,39	9,00	10,18	0,63	2,05	3,08	2,86	9,39	14,09	95
	2.0+2.0+2.0+3.5+5.0	1,24	1,24	1,24	2,17	3,10	3,50	9,00	10,36	0,63	2,00	3,11	2,86	9,16	14,22	95
	2.0+2.0+2.0+3.5+6.0	1,16	1,16	1,16	2,03	3,48	3,65	9,00	10,70	0,65	1,98	3,10	2,99	9,07	14,17	95
	2.0+2.0+2.0+4.2+4.2	1,25	1,25	1,25	2,63	2,63	3,48	9,00	10,19	0,63	2,04	3,09	2,86	9,34	14,13	95
	2.0+2.0+2.0+4.2+5.0	1,18	1,18	1,18	2,49	2,96	3,60	9,00	10,68	0,65	2,00	3,46	2,99	9,16	15,84	95
	2.0+2.0+2.5+2.5+2.5	1,57	1,57	1,96	1,96	1,96	3,07	9,00	9,83	0,56	2,08	2,88	2,57	9,52	13,20	95
	2.0+2.0+2.5+2.5+3.5	1,44	1,44	1,80	1,80	2,52	3,21	9,00	10,16	0,60	2,06	3,08	2,74	9,43	14,09	95
	2.0+2.0+2.5+2.5+4.2	1,36	1,36	1,70	1,70	2,86	3,32	9,00	9,85	0,60	2,05	3,08	2,74	9,39	14,09	95
	2.0+2.0+2.5+2.5+5.0	1,29	1,29	1,61	1,61	3,21	3,43	9,00	10,35	0,63	2,00	3,11	2,86	9,16	14,22	95
	2.0+2.0+2.5+2.5+6.0	1,20	1,20	1,50	1,50	3,60	3,57	9,00	10,66	0,63	1,98	3,10	2,86	9,07	14,17	95
	2.0+2.0+2.5+3.5+3.5	1,33	1,33	1,67	2,33	2,33	3,36	9,00	10,17	0,63	2,05	3,08	2,86	9,39	14,09	95
	2.0+2.0+2.5+3.5+4.2	1,27	1,27	1,58	2,22	2,66	3,46	9,00	9,85	0,63	2,04	3,08	2,86	9,34	14,09	95
	2.0+2.0+2.5+3.5+5.0	1,20	1,20	1,50	2,10	3,00	3,57	9,00	10,66	0,65	2,00	3,38	2,99	9,16	15,48	95
	2.0+2.0+2.5+4.2+4.2	1,21	1,21	1,51	2,54	2,54	3,56	9,00	10,65	0,65	2,03	3,57	2,99	9,30	16,33	95
	2.0+2.0+3.5+3.5+3.5	1,24	1,24	2,17	2,17	2,17	3,50	9,00	10,18	0,63	2,04	3,08	2,86	9,34	14,09	95
	2.0+2.0+3.5+3.5+4.2	1,18	1,18	2,07	2,07	2,49	3,60	9,00	10,68	0,65	2,03	3,57	2,99	9,30	16,33	95
	2.0+2.5+2.5+2.5+2.5	1,50	1,88	1,88	1,88	1,88	3,14	9,00	10,01	0,56	2,07	3,02	2,57	9,48	13,81	95
	2.0+2.5+2.5+2.5+3.5	1,38	1,73	1,73	1,73	2,42	3,29	9,00	10,16	0,60	2,05	3,08	2,74	9,39	14,09	95
	2.0+2.5+2.5+2.5+4.2	1,31	1,64	1,64	1,64	2,76	3,39	9,00	10,17	0,63	2,04	3,08	2,86	9,34	14,09	95
	2.0+2.5+2.5+2.5+5.0	1,24	1,55	1,55	1,55	3,10	3,50	9,00	10,35	0,63	2,00	3,11	2,86	9,16	14,22	95
	2.0+2.5+2.5+2.5+6.0	1,16	1,45	1,45	1,45	3,48	3,65	9,00	10,70	0,65	1,97	3,10	2,99	9,02	14,17	95
	2.0+2.5+2.5+3.5+3.5	1,29	1,61	1,61	2,25	2,25	3,43	9,00	10,17	0,63	2,04	3,08	2,86	9,34	14,09	95
	2.0+2.5+2.5+3.5+4.2	1,22	1,53	1,53	2,14	2,57	3,53	9,00	10,62	0,65	2,03	3,57	2,99	9,30	16,33	95
	2.0+2.5+2.5+3.5+5.0	1,16	1,45	1,45	2,03	2,90	3,65	9,00	10,70	0,65	1,97	3,45	2,99	9,02	15,80	95
	2.0+2.5+2.5+4.2+4.2	1,17	1,46	1,46	2,45	2,45	3,60	9,00	10,68	0,65	2,03	3,57	2,99	9,30	16,33	95
	2.0+2.5+3.5+3.5+3.5	1,20	1,50	2,10	2,10	2,10	3,57	9,00	10,63	0,65	2,02	3,57	2,99	9,25	16,33	95
	2.5+2.5+2.5+2.5+2.5	1,80	1,80	1,80	1,80	1,80	3,21	9,00	10,15	0,60	2,02	3,08	2,74	9,25	14,09	95
	2.5+2.5+2.5+2.5+3.5	1,67	1,67	1,67	1,67	2,33	3,36	9,00	10,16	0,63	2,01	3,08	2,86	9,20	14,09	95
	2.5+2.5+2.5+2.5+4.2	1,58	1,58	1,58	1,58	2,66	3,46	9,00	10,17	0,63	2,01	3,08	2,86	9,20	14,09	95
	2.5+2.5+2.5+2.5+5.0	1,50	1,50	1,50	1,50	3,00	3,57	9,00	10,66	0,65	2,00	3,45	2,99	9,16	15,80	95
	2.5+2.5+2.5+3.5+3.5	1,55	1,55	1,55	2,17	2,17	3,50	9,00	10,17	0,63	2,00	3,08	2,86	9,16	14,09	95
	2.5+2.5+2.5+3.5+4.2	1,48	1,48	1,48	2,07	2,49	3,60	9,00	10,68	0,65	1,99	3,57	2,99	9,11	16,33	95
	2.5+2.5+3.5+3.5+3.5	1,45	1,45	2,03	2,03	2,03	3,65	9,00	10,63	0,65	1,99	3,57	2,99	9,11	16,33	95

Notes

1The total capacity of each connected indoor unit is up to ·15.5·kW.

2The values above are for connecting with the following indoor unit types:

·2.0,2.5,3.5,4.2,5.0,6.0· kW class

Wall-mounted ·FTXM-M, FTXM-N, FTXM-R· series

3.These indoor units can only be used in a multi-unit setup.

4.Cooling capacity conditions

Indoor temperature ·27·°C DB / ·19·°C WB

Outdoor temperature ·35·°C DB

3D105434A

4 Combination table

4 - 1 Combination Table

5MXM-N9

Heating · (50Hz 230V)·

Outdoor unit	Indoor unit	Heating capacity [kW]					Total capacity [kW]			Power input [kW]			Total current [A]			Power factor [%]
		Room ·A·	Room ·B·	Room ·C·	Room ·D·	Room ·E·	Minimum	Nominal	Maximum	Minimum	Nominal	Maximum	Minimum	Nominal	Maximum	
5MXM90M2V1B 5MXM90N2V1B 5MXM90N2V1B9	1,5	1,90	---	---	---	---	1,28	1,90	4,15	0,28	0,53	1,31	1,29	2,43	5,98	95
	2,0	2,49	---	---	---	---	1,33	2,49	4,37	0,34	0,67	1,37	1,55	3,05	6,25	95
	2,5	3,11	---	---	---	---	1,39	3,11	4,84	0,36	0,88	1,47	1,64	4,04	6,71	95
	3,5	4,36	---	---	---	---	1,51	4,36	5,31	0,38	1,40	1,93	1,73	6,42	8,84	95
	4,2	5,23	---	---	---	---	1,56	5,23	6,16	0,40	1,63	2,06	1,82	7,45	9,42	95
	5,0	6,21	---	---	---	---	1,94	6,21	7,75	0,47	1,76	2,39	2,13	8,08	10,92	95
	6,0	7,46	---	---	---	---	2,23	7,46	9,05	0,58	2,25	2,86	2,66	10,32	13,09	95
	7,1	8,82	---	---	---	---	2,55	8,82	9,38	0,65	2,81	3,01	2,97	12,88	13,77	95
	1.5+1.5	1,85	1,85	---	---	---	1,51	3,70	7,45	0,37	0,88	1,85	1,68	4,03	8,47	95
	1.5+2.0	1,84	2,46	---	---	---	1,57	4,30	7,83	0,35	1,04	2,01	1,59	4,76	9,20	95
	1.5+2.5	1,84	3,06	---	---	---	1,72	4,90	8,02	0,37	1,20	2,08	1,68	5,50	9,52	95
	1.5+3.5	1,83	4,27	---	---	---	2,02	6,10	8,57	0,44	1,68	2,37	2,02	7,69	10,85	95
	1.5+4.2	1,84	5,16	---	---	---	2,23	7,00	8,92	0,42	1,99	2,59	1,94	9,11	11,85	95
	1.5+5.0	1,85	6,15	---	---	---	2,48	8,00	10,45	0,44	2,17	2,93	2,02	9,94	13,41	95
	1.5+6.0	1,80	7,20	---	---	---	2,77	9,00	10,65	0,48	2,47	2,72	2,19	11,31	12,45	95
	1.5+7.1	1,74	8,26	---	---	---	3,09	10,00	10,67	0,52	2,90	2,70	2,37	13,28	12,36	95
	2.0+2.0	2,45	2,45	---	---	---	1,72	4,90	8,02	0,37	1,19	2,33	1,68	5,45	10,66	95
	2.0+2.5	2,44	3,06	---	---	---	1,88	5,50	8,19	0,39	1,37	2,34	1,76	6,28	10,71	95
	2.0+3.5	2,44	4,26	---	---	---	2,17	6,70	8,74	0,47	1,75	2,45	2,15	8,01	11,21	95
	2.0+4.2	2,45	5,15	---	---	---	2,39	7,60	9,10	0,58	2,04	2,68	2,67	9,34	12,27	95
	2.0+5.0	2,43	6,07	---	---	---	2,62	8,50	10,63	0,59	2,35	3,02	2,71	10,76	13,82	95
	2.0+6.0	2,33	6,98	---	---	---	2,92	9,30	10,82	0,61	2,62	2,72	2,80	12,00	12,45	95
	2.0+7.1	2,20	7,80	---	---	---	3,23	10,00	10,92	0,65	2,90	2,93	2,97	13,28	13,41	95
	2.5+2.5	3,05	3,05	---	---	---	2,02	6,10	8,56	0,44	1,73	2,38	2,02	7,92	10,89	95
	2.5+3.5	3,04	4,26	---	---	---	2,33	7,30	9,12	0,56	2,08	2,70	2,58	9,52	12,36	95
	2.5+4.2	3,06	5,14	---	---	---	2,54	8,20	9,38	0,61	2,35	2,93	2,80	10,76	13,41	95
	2.5+5.0	3,00	6,00	---	---	---	2,77	9,00	10,72	0,62	2,58	3,11	2,84	11,81	14,23	95
	2.5+6.0	2,82	6,78	---	---	---	3,06	9,60	10,92	0,63	2,76	2,79	2,88	12,64	12,77	95
	2.5+7.1	2,60	7,40	---	---	---	3,38	10,00	11,20	0,68	2,89	3,18	3,10	13,23	14,55	95
	3.5+3.5	4,25	4,25	---	---	---	2,62	8,50	9,57	0,61	2,54	2,90	2,80	11,63	13,27	95
	3.5+4.2	4,09	4,91	---	---	---	2,83	9,00	10,18	0,66	2,77	3,25	3,01	12,68	14,87	95
	3.5+5.0	3,91	5,59	---	---	---	3,06	9,50	10,94	0,67	2,73	3,15	3,05	12,50	14,42	95
	3.5+6.0	3,68	6,32	---	---	---	3,35	10,00	11,18	0,68	2,77	3,16	3,10	12,68	14,46	95
	3.5+7.1	3,30	6,70	---	---	---	3,66	10,00	11,21	0,72	2,73	3,08	3,31	12,50	13,78	95
	4.2+4.2	4,75	4,75	---	---	---	3,03	9,50	9,99	0,68	2,62	3,25	3,10	12,00	14,87	95
	4.2+5.0	4,57	5,43	---	---	---	3,26	10,00	10,95	0,69	2,78	3,21	3,14	12,73	14,69	95
	4.2+6.0	4,12	5,88	---	---	---	3,55	10,00	11,19	0,71	2,74	3,15	3,23	12,55	14,42	95
	4.2+7.1	3,72	6,28	---	---	---	3,87	10,00	11,21	0,74	2,69	3,07	3,40	12,32	14,05	95
	5.0+5.0	5,00	5,00	---	---	---	3,49	10,00	11,12	0,71	2,71	3,13	3,27	12,41	14,32	95
	5.0+6.0	4,55	5,45	---	---	---	3,77	10,00	11,32	0,71	2,67	3,05	3,23	12,22	13,96	95
	5.0+7.1	4,13	5,87	---	---	---	4,09	10,00	11,35	0,78	2,63	2,83	3,57	12,04	12,95	95
	6.0+6.0	5,00	5,00	---	---	---	4,07	10,00	11,14	0,71	2,65	2,80	3,27	12,13	12,81	95
	6.0+7.1	4,58	5,42	---	---	---	4,39	10,00	11,17	0,79	2,62	2,79	3,61	12,00	12,77	95
	7.1+7.1	5,00	5,00	---	---	---	4,70	10,00	11,20	0,84	2,60	2,78	3,83	11,90	12,72	95

Notes

- The total capacity of each connected indoor unit is up to ·15.6-kW.
- The values above are for connecting with the following indoor unit types:
·1.5, 2.0, 2.5, 3.5, 4.2, 5.0, 6.0, 7.1· kW class
Wall-mounted ·FTXM-M, FTXM-N, FTXM-R· series
- Heating capacity conditions
Indoor temperature ·20°C DB
Outdoor temperature ·7°C DB / ·6°C WB
- For additional information on the connection of the DHW generator for Multi and the Hybrid for Multi, see ·3D106169·.

3D105435B

4 Combination table

4 - 1 Combination Table

5MXM-N9

4

Heating (50Hz 230V)

Outdoor unit	Indoor unit	Heating capacity [kW]					Total capacity [kW]			Power input [kW]			Total current [A]			Power factor [%]
		Room ·A·	Room ·B·	Room ·C·	Room ·D·	Room ·E·	Minimum	Nominal	Maximum	Minimum	Nominal	Maximum	Minimum	Nominal	Maximum	
5MXM90M2V1B 5MXM90N2V1B 5MXM90N2V1B9	1.5+1.5+1.5	1,83	1,83	1,83	---	---	1,88	5,50	9,97	0,44	1,20	2,28	2,02	5,50	10,43	95
	1.5+1.5+2.0	1,83	1,83	2,44	---	---	2,02	6,10	10,15	0,46	1,38	2,36	2,11	6,32	10,80	95
	1.5+1.5+2.5	1,83	1,83	3,05	---	---	2,17	6,70	10,23	0,48	1,59	2,39	2,19	7,28	10,94	95
	1.5+1.5+3.5	1,85	1,85	4,31	---	---	2,48	8,00	10,34	0,52	2,05	2,51	2,37	9,39	11,49	95
	1.5+1.5+4.2	1,81	1,81	5,08	---	---	2,68	8,70	10,34	0,56	2,29	2,51	2,58	10,49	11,49	95
	1.5+1.5+5.0	1,74	1,74	5,81	---	---	2,92	9,30	10,51	0,56	2,48	2,61	2,58	11,36	11,95	95
	1.5+1.5+6.0	1,58	1,58	6,33	---	---	3,20	9,50	11,14	0,57	2,48	2,80	2,62	11,36	12,81	95
	1.5+1.5+7.1	1,49	1,49	7,03	---	---	3,52	10,00	11,18	0,61	2,70	2,79	2,80	12,36	12,77	95
	1.5+2.0+2.0	1,83	2,44	2,44	---	---	2,17	6,70	10,31	0,48	1,60	2,43	2,19	7,33	11,12	95
	1.5+2.0+2.5	1,83	2,43	3,04	---	---	2,33	7,30	10,41	0,50	1,77	2,46	2,28	8,11	11,26	95
	1.5+2.0+3.5	1,82	2,43	4,25	---	---	2,63	8,50	10,50	0,54	2,21	2,60	2,45	10,12	11,90	95
	1.5+2.0+4.2	1,75	2,34	4,91	---	---	2,83	9,00	10,51	0,58	2,39	2,66	2,67	10,94	12,17	95
	1.5+2.0+5.0	1,76	2,35	5,88	---	---	3,06	10,00	10,93	0,58	2,77	2,66	2,67	12,68	12,17	95
	1.5+2.0+6.0	1,58	2,11	6,32	---	---	3,35	10,00	11,14	0,60	2,71	2,80	2,75	12,41	12,81	95
	1.5+2.0+7.1	1,42	1,89	6,70	---	---	3,66	10,00	11,18	0,64	2,69	2,79	2,93	12,32	12,77	95
	1.5+2.5+2.5	1,85	3,08	3,08	---	---	2,48	8,00	10,52	0,52	2,00	2,46	2,37	9,16	11,26	95
	1.5+2.5+3.5	1,80	3,00	4,20	---	---	2,77	9,00	10,63	0,56	2,35	2,66	2,58	10,76	12,17	95
	1.5+2.5+4.2	1,83	3,05	5,12	---	---	2,97	10,00	10,63	0,60	2,74	2,66	2,75	12,55	12,17	95
	1.5+2.5+5.0	1,67	2,78	5,56	---	---	3,20	10,00	11,05	0,61	2,63	2,82	2,80	12,04	12,91	95
	1.5+2.5+6.0	1,50	2,50	6,00	---	---	3,49	10,00	11,14	0,62	2,58	2,80	2,84	11,81	12,81	95
	1.5+2.5+7.1	1,35	2,25	6,40	---	---	3,80	10,00	11,18	0,66	2,53	2,79	3,01	11,58	12,77	95
	1.5+3.5+3.5	1,76	4,12	4,12	---	---	3,06	10,00	10,64	0,60	2,74	2,66	2,75	12,55	12,17	95
	1.5+3.5+4.2	1,63	3,80	4,57	---	---	3,26	10,00	10,78	0,65	2,72	2,87	2,97	12,45	13,14	95
	1.5+3.5+5.0	1,50	3,50	5,00	---	---	3,49	10,00	10,98	0,66	2,61	2,82	3,01	11,95	12,91	95
	1.5+3.5+6.0	1,36	3,18	5,45	---	---	3,77	10,00	11,15	0,67	2,56	2,80	3,05	11,72	12,81	95
	1.5+3.5+7.1	1,24	2,89	5,87	---	---	4,09	10,00	11,18	0,73	2,51	2,79	3,36	11,49	12,77	95
	1.5+4.2+4.2	1,52	4,24	4,24	---	---	3,46	10,00	10,90	0,68	2,69	2,92	3,10	12,32	13,36	95
	1.5+4.2+5.0	1,40	3,93	4,67	---	---	3,69	10,00	11,03	0,71	2,59	2,82	3,23	11,86	12,91	95
	1.5+4.2+6.0	1,28	3,59	5,13	---	---	3,98	10,00	11,27	0,71	2,54	2,80	3,27	11,63	12,81	95
	1.5+4.2+7.1	1,17	3,28	5,55	---	---	4,29	10,00	11,30	0,76	2,49	2,78	3,48	11,40	12,72	95
	1.5+5.0+5.0	1,30	4,35	4,35	---	---	3,92	10,00	11,17	0,71	2,50	2,83	3,23	11,45	12,95	95
	1.5+5.0+6.0	1,20	4,00	4,80	---	---	4,21	10,00	11,41	0,71	2,46	2,75	3,27	11,26	12,59	95
	1.5+5.0+7.1	1,10	3,68	5,22	---	---	4,53	10,00	11,44	0,79	2,41	2,73	3,61	11,03	12,49	95
	1.5+6.0+6.0	1,11	4,44	4,44	---	---	4,50	10,00	11,65	0,72	2,42	2,67	3,31	11,08	12,22	95
	1.5+6.0+7.1	1,32	3,97	4,70	---	---	4,81	10,00	11,68	0,79	2,40	2,66	3,61	10,99	12,17	95
	2.0+2.0+2.0	2,50	2,50	2,50	---	---	2,33	7,50	10,49	0,50	1,77	2,50	2,28	8,11	11,44	95
	2.0+2.0+2.5	2,46	2,46	3,08	---	---	2,48	8,00	10,57	0,52	1,92	2,54	2,37	8,79	11,62	95
	2.0+2.0+3.5	2,40	2,40	4,20	---	---	2,77	9,00	10,68	0,56	2,27	2,66	2,58	10,39	12,17	95
	2.0+2.0+4.2	2,29	2,29	4,81	---	---	2,97	9,40	10,68	0,60	2,47	2,66	2,75	11,31	12,17	95
	2.0+2.0+5.0	2,22	2,22	5,56	---	---	3,20	10,00	10,90	0,61	2,76	2,82	2,80	12,64	12,91	95
	2.0+2.0+6.0	2,00	2,00	6,00	---	---	3,49	10,00	11,14	0,62	2,72	2,80	2,84	12,45	12,81	95
	2.0+2.0+7.1	1,80	1,80	6,40	---	---	3,80	10,00	11,18	0,66	2,67	2,79	3,01	12,22	12,77	95
	2.0+2.5+2.5	2,43	3,04	3,04	---	---	2,62	8,50	10,59	0,54	2,15	2,63	2,45	9,84	12,04	95
	2.0+2.5+3.5	2,33	2,91	4,07	---	---	2,92	9,30	10,68	0,58	2,45	2,66	2,67	11,22	12,17	95

Notes

- The total capacity of each connected indoor unit is up to ·15.6·kW.
- The values above are for connecting with the following indoor unit types:
·1.5, 2.0, 2.5, 3.5, 4.2, 5.0, 6.0, 7.1· kW class
Wall-mounted ·FTXM-M, FTXM-N, FTXM-R· series
- Heating capacity conditions
Indoor temperature ·20·°C DB
Outdoor temperature ·7·°C DB / ·6·°C WB
- For additional information on the connection of the DHW generator for Multi and the Hybrid for Multi, see ·3D106169·.

3D105436B

4 Combination table

4 - 1 Combination Table

5MXM-N9

Heating ·(50Hz 230V)·

Outdoor unit	Indoor unit	Heating capacity [kW]					Total capacity [kW]			Power input [kW]			Total current [A]			Power factor [%]
		Room ·A·	Room ·B·	Room ·C·	Room ·D·	Room ·E·	Minimum	Nominal	Maximum	Minimum	Nominal	Maximum	Minimum	Nominal	Maximum	
5MXM90M2V1B 5MXM90N2V1B 5MXM90N2V1B9	2.0+2.5+4.2	2,30	2,87	4,83	---	---	3,12	10,00	10,77	0,63	2,77	2,87	2,88	12,68	13,14	95
	2.0+2.5+5.0	2,11	2,63	5,26	---	---	3,35	10,00	11,11	0,63	2,73	2,82	2,88	12,50	12,91	95
	2.0+2.5+6.0	1,90	2,38	5,71	---	---	3,63	10,00	11,14	0,64	2,68	2,80	2,93	12,27	12,81	95
	2.0+2.5+7.1	1,72	2,16	6,12	---	---	3,95	10,00	11,18	0,69	2,66	2,79	3,14	12,18	12,77	95
	2.0+3.5+3.5	2,22	3,89	3,89	---	---	3,20	10,00	10,77	0,65	2,76	2,87	2,97	12,64	13,14	95
	2.0+3.5+4.2	2,06	3,61	4,33	---	---	3,41	10,00	10,97	0,68	2,75	2,97	3,10	12,59	13,59	95
	2.0+3.5+5.0	1,90	3,33	4,76	---	---	3,63	10,00	11,34	0,68	2,73	3,04	3,10	12,50	13,91	95
	2.0+3.5+6.0	1,74	3,04	5,22	---	---	3,92	10,00	11,34	0,69	2,68	2,80	3,14	12,27	12,81	95
	2.0+3.5+7.1	1,59	2,78	5,63	---	---	4,23	10,00	11,35	0,76	2,72	2,79	3,48	12,45	12,77	95
	2.0+4.2+4.2	1,92	4,04	4,04	---	---	3,60	10,00	10,98	0,70	2,73	2,97	3,18	12,50	13,59	95
	2.0+4.2+5.0	1,79	3,75	4,46	---	---	3,84	10,00	11,35	0,72	2,71	3,04	3,31	12,41	13,91	95
	2.0+4.2+6.0	1,64	3,44	4,92	---	---	4,12	10,00	11,37	0,73	2,60	2,80	3,36	11,90	12,81	95
	2.0+4.2+7.1	1,50	3,16	5,34	---	---	4,44	10,00	11,40	0,78	2,55	2,78	3,57	11,68	12,72	95
	2.0+5.0+5.0	1,67	4,17	4,17	---	---	4,07	10,00	11,06	0,75	2,59	2,83	3,44	11,86	12,95	95
	2.0+5.0+6.0	1,54	3,85	4,62	---	---	4,36	10,00	11,29	0,74	2,55	2,75	3,40	11,68	12,59	95
	2.0+5.0+7.1	1,42	3,55	5,04	---	---	4,67	10,00	11,33	0,81	2,53	2,73	3,70	11,58	12,49	95
	2.0+6.0+6.0	1,43	4,29	4,29	---	---	4,64	10,00	11,53	0,77	2,44	2,67	3,53	11,17	12,22	95
	2.0+6.0+7.1	1,32	3,97	4,70	---	---	4,96	10,00	11,56	0,82	2,39	2,66	3,74	10,94	12,17	95
	2.5+2.5+2.5	3,33	3,33	3,33	---	---	2,77	10,00	10,72	0,56	2,67	2,66	2,58	12,22	12,17	95
	2.5+2.5+3.5	2,94	2,94	4,12	---	---	3,06	10,00	10,92	0,63	2,63	2,74	2,88	12,04	12,54	95
	2.5+2.5+4.2	2,72	2,72	4,57	---	---	3,26	10,00	11,04	0,65	2,61	2,87	2,97	11,95	13,14	95
	2.5+2.5+5.0	2,50	2,50	5,00	---	---	3,49	10,00	11,33	0,66	2,51	3,04	3,01	11,49	13,91	95
	2.5+2.5+6.0	2,27	2,27	5,45	---	---	3,77	10,00	11,35	0,67	2,46	2,80	3,05	11,26	12,81	95
	2.5+2.5+7.1	2,07	2,07	5,87	---	---	4,09	10,00	11,37	0,73	2,41	2,79	3,36	11,03	12,77	95
	2.5+3.5+3.5	2,63	3,68	3,68	---	---	3,35	10,00	11,19	0,68	2,57	3,08	3,10	11,77	14,10	95
	2.5+3.5+4.2	2,45	3,43	4,12	---	---	3,55	10,00	11,20	0,70	2,55	3,08	3,18	11,68	14,10	95
	2.5+3.5+5.0	2,27	3,18	4,55	---	---	3,77	10,00	11,34	0,71	2,45	3,04	3,23	11,22	13,91	95
	2.5+3.5+6.0	2,08	2,92	5,00	---	---	4,07	10,00	11,35	0,71	2,40	2,80	3,27	10,99	12,81	95
	2.5+3.5+7.1	1,91	2,67	5,42	---	---	4,39	10,00	11,40	0,78	2,36	2,79	3,57	10,81	12,77	95
	2.5+4.2+4.2	2,29	3,85	3,85	---	---	3,75	10,00	11,20	0,72	2,53	3,08	3,31	11,58	14,10	95
	2.5+4.2+5.0	2,14	3,59	4,27	---	---	3,98	10,00	11,35	0,75	2,43	3,04	3,44	11,13	13,91	95
	2.5+4.2+6.0	1,97	3,31	4,72	---	---	4,26	10,00	11,37	0,76	2,39	2,80	3,48	10,94	12,81	95
	2.5+4.2+7.1	1,81	3,04	5,14	---	---	4,58	10,00	11,40	0,81	2,34	2,78	3,70	10,71	12,72	95
	2.5+5.0+5.0	2,00	4,00	4,00	---	---	4,21	10,00	11,06	0,78	2,41	2,83	3,57	11,03	12,95	95
	2.5+5.0+6.0	1,85	3,70	4,44	---	---	4,50	10,00	11,29	0,79	2,37	2,75	3,61	10,85	12,59	95
	2.5+5.0+7.1	1,71	3,42	4,86	---	---	4,81	10,00	11,33	0,84	2,33	2,73	3,83	10,67	12,49	95
	2.5+6.0+6.0	1,72	4,14	4,14	---	---	4,78	10,00	11,53	0,80	2,35	2,67	3,66	10,76	12,22	95
	2.5+6.0+7.1	1,60	3,85	4,55	---	---	5,10	10,00	11,56	0,85	2,31	2,66	3,87	10,58	12,17	95
	3.5+3.5+3.5	3,33	3,33	3,33	---	---	3,63	10,00	11,19	0,72	2,66	3,08	3,31	12,18	14,10	95
	3.5+3.5+4.2	3,13	3,13	3,75	---	---	3,84	10,00	11,20	0,75	2,63	3,08	3,44	12,04	14,10	95
	3.5+3.5+5.0	2,92	2,92	4,17	---	---	4,07	10,00	11,35	0,78	2,53	3,04	3,57	11,58	13,91	95
	3.5+3.5+6.0	2,69	2,69	4,62	---	---	4,36	10,00	11,38	0,79	2,48	2,80	3,61	11,36	12,81	95
	3.5+3.5+7.1	2,48	2,48	5,04	---	---	4,67	10,00	11,39	0,84	2,43	2,78	3,83	11,13	12,72	95
	3.5+4.2+4.2	2,94	3,53	3,53	---	---	4,04	10,00	11,21	0,80	2,61	3,07	3,66	11,95	14,05	95

Notes

- The total capacity of each connected indoor unit is up to ·15.6·kW.
- The values above are for connecting with the following indoor unit types:
·1.5, 2.0, 2.5, 3.5, 4.2, 5.0, 6.0, 7.1· kW class
Wall-mounted ·FTXM-M, FTXM-N, FTXM-R· series
- Heating capacity conditions
Indoor temperature ·20·°C DB
Outdoor temperature ·7·°C DB / ·6·°C WB
- For additional information on the connection of the DHW generator for Multi and the Hybrid for Multi, see ·3D106169·.

3D105437B

4 Combination table

4 - 1 Combination Table

5MXM-N9

Heating (50Hz 230V)•

Outdoor unit	Indoor unit	Heating capacity [kW]					Total capacity [kW]			Power input [kW]			Total current [A]			Power factor [%]
		Room ·A·	Room ·B·	Room ·C·	Room ·D·	Room ·E·	Minimum	Nominal	Maximum	Minimum	Nominal	Maximum	Minimum	Nominal	Maximum	
5MXM90M2V1B 5MXM90N2V1B 5MXM90N2V1B9	3.5+4.2+5.0	2,76	3,31	3,94	---	---	4,26	10,00	11,22	0,80	2,51	2,87	3,66	11,49	13,14	95
	3.5+4.2+6.0	2,55	3,07	4,38	---	---	4,55	10,00	11,25	0,82	2,46	2,79	3,74	11,26	12,77	95
	3.5+4.2+7.1	2,36	2,84	4,80	---	---	4,88	10,00	11,27	0,89	2,41	2,78	4,09	11,03	12,72	95
	3.5+5.0+5.0	2,59	3,70	3,70	---	---	4,50	10,00	11,07	0,84	2,49	2,82	3,83	11,40	12,91	95
	3.5+5.0+6.0	2,41	3,45	4,14	---	---	4,78	10,00	11,29	0,85	2,44	2,74	3,87	11,17	12,54	95
	3.5+5.0+7.1	2,24	3,21	4,55	---	---	5,10	10,00	11,34	0,89	2,39	2,73	4,09	10,94	12,49	95
	3.5+6.0+6.0	2,26	3,87	3,87	---	---	5,07	10,00	11,53	0,86	2,42	2,67	3,91	11,08	12,22	95
	4.2+4.2+4.2	3,33	3,33	3,33	---	---	4,23	10,00	11,22	0,83	2,59	3,07	3,79	11,86	14,05	95
	4.2+4.2+5.0	3,13	3,13	3,73	---	---	4,47	10,00	11,25	0,86	2,49	2,87	3,91	11,40	13,14	95
	4.2+4.2+6.0	2,92	2,92	4,17	---	---	4,75	10,00	11,27	0,86	2,44	2,79	3,96	11,17	12,77	95
	4.2+4.2+7.1	2,71	2,71	4,58	---	---	5,07	10,00	11,30	0,92	2,39	2,78	4,22	10,94	12,72	95
	4.2+5.0+5.0	2,96	3,52	3,52	---	---	4,70	10,00	11,07	0,86	2,47	2,82	3,91	11,31	12,91	95
	4.2+5.0+6.0	2,76	3,29	3,95	---	---	4,99	10,00	11,30	0,87	2,42	2,74	4,00	11,08	12,54	95
	5.0+5.0+5.0	3,33	3,33	3,33	---	---	4,93	10,00	11,20	0,89	2,45	2,78	4,09	11,22	12,72	95
	1.5+1.5+1.5+1.5	1,83	1,83	1,83	1,83	---	2,33	7,30	10,12	0,43	1,71	2,14	1,98	7,83	9,79	95
	1.5+1.5+1.5+2.0	1,85	1,85	1,85	2,46	---	2,48	8,00	10,30	0,45	1,93	2,24	2,06	8,84	10,25	95
	1.5+1.5+1.5+2.5	1,82	1,82	1,82	3,04	---	2,63	8,50	10,41	0,47	2,07	2,24	2,15	9,48	10,25	95
	1.5+1.5+1.5+3.5	1,74	1,74	1,74	4,07	---	2,92	9,30	10,60	0,51	2,32	2,53	2,32	10,62	11,58	95
	1.5+1.5+1.5+4.2	1,72	1,72	1,72	4,83	---	3,12	10,00	11,17	0,55	2,60	2,79	2,54	11,90	12,77	95
	1.5+1.5+1.5+5.0	1,58	1,58	1,58	5,26	---	3,35	10,00	11,29	0,55	2,50	2,74	2,54	11,45	12,54	95
	1.5+1.5+1.5+6.0	1,43	1,43	1,43	5,71	---	3,63	10,00	11,53	0,56	2,45	2,67	2,58	11,22	12,22	95
	1.5+1.5+1.5+7.1	1,29	1,29	1,29	6,12	---	3,95	10,00	11,56	0,62	2,40	2,65	2,84	10,99	12,13	95
	1.5+1.5+2.0+2.0	1,82	1,82	2,43	2,43	---	2,63	8,50	10,49	0,47	2,04	2,28	2,15	9,34	10,43	95
	1.5+1.5+2.0+2.5	1,80	1,80	2,40	3,00	---	2,77	9,00	10,59	0,49	2,19	2,54	2,24	10,03	11,62	95
	1.5+1.5+2.0+3.5	1,76	1,76	2,35	4,12	---	3,06	10,00	10,69	0,55	2,52	2,53	2,54	11,54	11,58	95
	1.5+1.5+2.0+4.2	1,63	1,63	2,17	4,57	---	3,26	10,00	11,17	0,57	2,50	2,79	2,62	11,45	12,77	95
	1.5+1.5+2.0+5.0	1,50	1,50	2,00	5,00	---	3,49	10,00	11,29	0,60	2,40	2,74	2,75	10,99	12,54	95
	1.5+1.5+2.0+6.0	1,36	1,36	1,82	5,45	---	3,77	10,00	11,53	0,58	2,35	2,67	2,67	10,76	12,22	95
	1.5+1.5+2.0+7.1	1,24	1,24	1,65	5,87	---	4,09	10,00	11,56	0,65	2,31	2,65	2,97	10,58	12,13	95
	1.5+1.5+2.5+2.5	1,88	1,88	3,13	3,13	---	2,92	10,00	10,59	0,54	2,54	2,54	2,45	11,63	11,62	95
	1.5+1.5+2.5+3.5	1,67	1,67	2,78	3,89	---	3,20	10,00	11,16	0,57	2,50	2,80	2,62	11,45	12,81	95
	1.5+1.5+2.5+4.2	1,55	1,55	2,58	4,33	---	3,41	10,00	11,17	0,59	2,48	2,79	2,71	11,36	12,77	95
	1.5+1.5+2.5+5.0	1,43	1,43	2,38	4,76	---	3,63	10,00	11,29	0,62	2,38	2,74	2,84	10,90	12,54	95
	1.5+1.5+2.5+6.0	1,30	1,30	2,17	5,22	---	3,92	10,00	11,53	0,63	2,34	2,67	2,88	10,71	12,22	95
	1.5+1.5+2.5+7.1	1,19	1,19	1,98	5,63	---	4,23	10,00	11,56	0,67	2,29	2,65	3,05	10,49	12,13	95
	1.5+1.5+3.5+3.5	1,50	1,50	3,50	3,50	---	3,49	10,00	11,17	0,62	2,48	2,79	2,84	11,36	12,77	95
	1.5+1.5+3.5+4.2	1,40	1,40	3,27	3,93	---	3,69	10,00	11,17	0,64	2,46	2,79	2,93	11,26	12,77	95
	1.5+1.5+3.5+5.0	1,30	1,30	3,04	4,35	---	3,92	10,00	11,30	0,67	2,36	2,74	3,05	10,81	12,54	95
	1.5+1.5+3.5+6.0	1,20	1,20	2,80	4,80	---	4,21	10,00	11,54	0,68	2,32	2,66	3,10	10,62	12,17	95
	1.5+1.5+3.5+7.1	1,10	1,10	2,57	5,22	---	4,53	10,00	11,58	0,74	2,28	2,65	3,40	10,44	12,13	95
	1.5+1.5+4.2+4.2	1,32	1,32	3,68	3,68	---	3,90	10,00	11,18	0,69	2,44	2,79	3,14	11,17	12,77	95
	1.5+1.5+4.2+5.0	1,23	1,23	3,44	4,10	---	4,12	10,00	11,32	0,71	2,34	2,74	3,27	10,71	12,54	95
	1.5+1.5+4.2+6.0	1,14	1,14	3,18	4,55	---	4,41	10,00	11,55	0,72	2,30	2,66	3,31	10,53	12,17	95
	1.5+1.5+4.2+7.1	1,05	1,05	2,94	4,97	---	4,72	10,00	11,59	0,76	2,26	2,65	3,48	10,35	12,13	95

Notes

- The total capacity of each connected indoor unit is up to ·15.6·kW.
- The values above are for connecting with the following indoor unit types:
·1.5, 2.0, 2.5, 3.5, 4.2, 5.0, 6.0, 7.1· kW class
Wall-mounted ·FTXM-M, FTXM-N, FTXM-R· series
- Heating capacity conditions
Indoor temperature ·20·°C DB
Outdoor temperature ·7·°C DB / ·6·°C WB
- For additional information on the connection of the DHW generator for Multi and the Hybrid for Multi, see
·3D106169·.

3D105438B

4 Combination table

4 - 1 Combination Table

5MXM-N9

Heating (50Hz 230V)

Outdoor unit	Indoor unit	Heating capacity [kW]					Total capacity [kW]			Power input [kW]			Total current [A]			Power factor [%]
		Room · A ·	Room · B ·	Room · C ·	Room · D ·	Room · E ·	Minimum	Nominal	Maximum	Minimum	Nominal	Maximum	Minimum	Nominal	Maximum	
5MXM90M2V1B 5MXM90N2V1B 5MXM90N2V1B9	1.5+1.5+5.0+5.0	1,15	1,15	3,85	3,85	---	4,36	10,00	11,45	0,71	2,33	2,70	3,27	10,67	12,36	95
	1.5+1.5+5.0+6.0	1,07	1,07	3,57	4,29	---	4,64	10,00	11,68	0,72	2,28	2,67	3,31	10,44	12,22	95
	1.5+1.5+5.0+7.1	0,99	0,99	3,31	4,70	---	4,96	10,00	11,72	0,79	2,24	2,65	3,61	10,26	12,13	95
	1.5+1.5+6.0+6.0	1,00	1,00	4,00	4,00	---	4,93	10,00	11,92	0,75	2,27	2,59	3,44	10,39	11,85	95
	1.5+2.0+2.0+2.0	1,90	2,53	2,53	2,53	---	2,77	9,50	10,68	0,49	2,31	2,54	2,24	10,58	11,62	95
	1.5+2.0+2.0+2.5	1,88	2,50	2,50	3,13	---	2,92	10,00	10,77	0,54	2,42	2,54	2,45	11,08	11,62	95
	1.5+2.0+2.0+3.5	1,67	2,22	2,22	3,89	---	3,20	10,00	11,16	0,57	2,40	2,80	2,62	10,99	12,81	95
	1.5+2.0+2.0+4.2	1,55	2,06	2,06	4,33	---	3,41	10,00	11,17	0,59	2,38	2,79	2,71	10,90	12,77	95
	1.5+2.0+2.0+5.0	1,43	1,90	1,90	4,76	---	3,63	10,00	11,29	0,62	2,35	2,74	2,84	10,76	12,54	95
	1.5+2.0+2.0+6.0	1,30	1,74	1,74	5,22	---	3,92	10,00	11,53	0,63	2,31	2,67	2,88	10,58	12,22	95
	1.5+2.0+2.0+7.1	1,19	1,59	1,59	5,63	---	4,23	10,00	11,56	0,67	2,29	2,65	3,05	10,49	12,13	95
	1.5+2.0+2.5+2.5	1,76	2,35	2,94	2,94	---	3,06	10,00	10,77	0,55	2,51	2,54	2,54	11,49	11,62	95
	1.5+2.0+2.5+3.5	1,58	2,11	2,63	3,68	---	3,35	10,00	11,16	0,59	2,47	2,80	2,71	11,31	12,81	95
	1.5+2.0+2.5+4.2	1,47	1,96	2,45	4,12	---	3,55	10,00	11,17	0,62	2,45	2,79	2,84	11,22	12,77	95
	1.5+2.0+2.5+5.0	1,36	1,82	2,27	4,55	---	3,77	10,00	11,29	0,64	2,36	2,74	2,93	10,81	12,54	95
	1.5+2.0+2.5+6.0	1,25	1,67	2,08	5,00	---	4,07	10,00	11,53	0,65	2,31	2,67	2,97	10,58	12,22	95
	1.5+2.0+2.5+7.1	1,15	1,53	1,91	5,42	---	4,39	10,00	11,56	0,70	2,27	2,65	3,18	10,39	12,13	95
	1.5+2.0+3.5+3.5	1,43	1,90	3,33	3,33	---	3,63	10,00	11,17	0,64	2,45	2,79	2,93	11,22	12,77	95
	1.5+2.0+3.5+4.2	1,34	1,79	3,13	3,75	---	3,84	10,00	11,17	0,69	2,43	2,79	3,14	11,13	12,77	95
	1.5+2.0+3.5+5.0	1,25	1,67	2,92	4,17	---	4,07	10,00	11,30	0,69	2,34	2,74	3,14	10,71	12,54	95
	1.5+2.0+3.5+6.0	1,15	1,54	2,69	4,62	---	4,36	10,00	11,54	0,70	2,30	2,66	3,18	10,53	12,17	95
	1.5+2.0+3.5+7.1	1,06	1,42	2,48	5,04	---	4,67	10,00	11,58	0,76	2,25	2,65	3,48	10,30	12,13	95
	1.5+2.0+4.2+4.2	1,26	1,68	3,53	3,53	---	4,04	10,00	11,18	0,71	2,41	2,79	3,23	11,03	12,77	95
	1.5+2.0+4.2+5.0	1,18	1,57	3,31	3,94	---	4,26	10,00	11,32	0,73	2,32	2,74	3,36	10,62	12,54	95
	1.5+2.0+4.2+6.0	1,09	1,46	3,07	4,38	---	4,55	10,00	11,55	0,74	2,28	2,66	3,40	10,44	12,17	95
	1.5+2.0+4.2+7.1	1,01	1,35	2,84	4,80	---	4,88	10,00	11,59	0,79	2,24	2,65	3,61	10,26	12,13	95
	1.5+2.0+5.0+5.0	1,11	1,48	3,70	3,70	---	4,50	10,00	11,45	0,74	2,31	2,70	3,40	10,58	12,36	95
	1.5+2.0+5.0+6.0	1,03	1,38	3,45	4,14	---	4,78	10,00	11,68	0,77	2,26	2,67	3,53	10,35	12,22	95
	1.5+2.0+5.0+7.1	0,96	1,28	3,21	4,55	---	5,10	10,00	11,72	0,82	2,22	2,65	3,74	10,17	12,13	95
	1.5+2.0+6.0+6.0	0,97	1,29	3,87	3,87	---	5,07	10,00	11,92	0,78	2,25	2,59	3,57	10,30	11,85	95
	1.5+2.5+2.5+2.5	1,67	2,78	2,78	2,78	---	3,20	10,00	11,15	0,57	2,49	2,80	2,62	11,40	12,81	95
	1.5+2.5+2.5+3.5	1,50	2,50	2,50	3,50	---	3,49	10,00	11,16	0,62	2,45	2,80	2,84	11,22	12,81	95
	1.5+2.5+2.5+4.2	1,40	2,34	2,34	3,93	---	3,69	10,00	11,17	0,64	2,43	2,79	2,93	11,13	12,77	95
	1.5+2.5+2.5+5.0	1,30	2,17	2,17	4,35	---	3,92	10,00	11,29	0,67	2,34	2,74	3,05	10,71	12,54	95
	1.5+2.5+2.5+6.0	1,20	2,00	2,00	4,80	---	4,21	10,00	11,53	0,68	2,30	2,67	3,10	10,53	12,22	95
	1.5+2.5+2.5+7.1	1,10	1,84	1,84	5,22	---	4,53	10,00	11,56	0,74	2,25	2,65	3,40	10,30	12,13	95
	1.5+2.5+3.5+3.5	1,36	2,27	3,18	3,18	---	3,77	10,00	11,17	0,67	2,43	2,79	3,05	11,13	12,77	95
	1.5+2.5+3.5+4.2	1,28	2,14	2,99	3,59	---	3,98	10,00	11,17	0,71	2,41	2,79	3,27	11,03	12,77	95
	1.5+2.5+3.5+5.0	1,20	2,00	2,80	4,00	---	4,21	10,00	11,30	0,71	2,32	2,74	3,27	10,62	12,54	95
	1.5+2.5+3.5+6.0	1,11	1,85	2,59	4,44	---	4,50	10,00	11,54	0,72	2,28	2,66	3,31	10,44	12,17	95
	1.5+2.5+3.5+7.1	1,03	1,71	2,40	4,86	---	4,81	10,00	11,58	0,79	2,24	2,65	3,61	10,26	12,13	95
	1.5+2.5+4.2+4.2	1,21	2,02	3,39	3,39	---	4,18	10,00	11,18	0,73	2,40	2,79	3,36	10,99	12,77	95
	1.5+2.5+4.2+5.0	1,14	1,89	3,18	3,79	---	4,41	10,00	11,32	0,76	2,31	2,74	3,48	10,58	12,54	95
	1.5+2.5+4.2+6.0	1,06	1,76	2,96	4,23	---	4,70	10,00	11,55	0,77	2,26	2,66	3,53	10,35	12,17	95

Notes

- The total capacity of each connected indoor unit is up to ·15.6·kW.
- The values above are for connecting with the following indoor unit types:
·1.5, 2.0, 2.5, 3.5, 4.2, 5.0, 6.0, 7.1· kW class
Wall-mounted ·FTXM-M, FTXM-N, FTXM-R· series
- Heating capacity conditions
Indoor temperature ·20·°C DB
Outdoor temperature ·7·°C DB / ·6·°C WB
- For additional information on the connection of the DHW generator for Multi and the Hybrid for Multi, see ·3D106169·.

3D105439B

4 Combination table

4 - 1 Combination Table

5MXM-N9

Heating (50Hz 230V)·

Outdoor unit	Indoor unit	Heating capacity [kW]					Total capacity [kW]			Power input [kW]			Total current [A]			Power factor [%]
		Room ·A·	Room ·B·	Room ·C·	Room ·D·	Room ·E·	Minimum	Nominal	Maximum	Minimum	Nominal	Maximum	Minimum	Nominal	Maximum	
5MXM90M2V1B 5MXM90N2V1B 5MXM90N2V1B9	1.5+2.5+4.2+7.1	0,98	1,63	2,75	4,64	---	5,02	10,00	11,59	0,85	2,22	2,65	3,87	10,17	12,13	95
	1.5+2.5+5.0+5.0	1,07	1,79	3,57	3,57	---	4,18	10,00	11,46	0,73	2,29	2,79	3,36	10,49	12,77	95
	1.5+2.5+5.0+6.0	1,00	1,67	3,33	4,00	---	4,41	10,00	11,48	0,76	2,25	2,74	3,48	10,30	12,54	95
	1.5+3.5+3.5+3.5	1,25	2,92	2,92	2,92	---	4,07	10,00	11,17	0,71	2,43	2,79	3,27	11,13	12,77	95
	1.5+3.5+3.5+4.2	1,18	2,76	2,76	3,31	---	4,26	10,00	11,18	0,76	2,41	2,79	3,48	11,03	12,77	95
	1.5+3.5+3.5+5.0	1,11	2,59	2,59	3,70	---	4,50	10,00	11,32	0,79	2,32	2,74	3,61	10,62	12,54	95
	1.5+3.5+3.5+6.0	1,03	2,41	2,41	4,14	---	4,78	10,00	11,55	0,80	2,28	2,66	3,66	10,44	12,17	95
	1.5+3.5+3.5+7.1	0,96	2,24	2,24	4,55	---	5,10	10,00	11,59	0,85	2,24	2,65	3,87	10,26	12,13	95
	1.5+3.5+4.2+4.2	1,12	2,61	3,13	3,13	---	4,47	10,00	11,19	0,78	2,40	2,78	3,57	10,99	12,72	95
	1.5+3.5+4.2+5.0	1,06	2,46	2,96	3,52	---	4,70	10,00	11,33	0,81	2,31	2,74	3,70	10,58	12,54	95
	1.5+3.5+4.2+6.0	0,99	2,30	2,76	3,95	---	4,99	10,00	11,56	0,82	2,26	2,66	3,74	10,35	12,17	95
	1.5+3.5+5.0+5.0	1,00	2,33	3,33	3,33	---	4,93	10,00	11,45	0,85	2,29	2,70	3,87	10,49	12,36	95
	1.5+4.2+4.2+4.2	1,06	2,98	2,98	2,98	---	4,67	10,00	11,20	0,84	2,38	2,78	3,83	10,90	12,72	95
	1.5+4.2+4.2+5.0	1,01	2,82	2,82	3,36	---	4,90	10,00	11,34	0,86	2,29	2,73	3,96	10,49	12,49	95
	2.0+2.0+2.0+2.0	2,50	2,50	2,50	2,50	---	2,92	10,00	10,86	0,54	2,53	2,54	2,45	11,58	11,62	95
	2.0+2.0+2.0+2.5	2,35	2,35	2,35	2,94	---	3,06	10,00	10,95	0,55	2,51	2,54	2,54	11,49	11,62	95
	2.0+2.0+2.0+3.5	2,11	2,11	2,11	3,68	---	3,35	10,00	11,16	0,59	2,47	2,80	2,71	11,31	12,81	95
	2.0+2.0+2.0+4.2	1,96	1,96	1,96	4,12	---	3,55	10,00	11,17	0,62	2,45	2,79	2,84	11,22	12,77	95
	2.0+2.0+2.0+5.0	1,82	1,82	1,82	4,55	---	3,77	10,00	11,29	0,64	2,36	2,75	2,93	10,81	12,59	95
	2.0+2.0+2.0+6.0	1,67	1,67	1,67	5,00	---	4,07	10,00	11,53	0,65	2,31	2,67	2,97	10,58	12,22	95
	2.0+2.0+2.0+7.1	1,53	1,53	1,53	5,42	---	4,39	10,00	11,56	0,70	2,27	2,65	3,18	10,39	12,13	95
	2.0+2.0+2.5+2.5	2,22	2,22	2,78	2,78	---	3,20	10,00	11,15	0,57	2,49	2,80	2,62	11,40	12,81	95
	2.0+2.0+2.5+3.5	2,00	2,00	2,50	3,50	---	3,49	10,00	11,16	0,62	2,45	2,80	2,84	11,22	12,81	95
	2.0+2.0+2.5+4.2	1,87	1,87	2,34	3,93	---	3,69	10,00	11,17	0,64	2,43	2,79	2,93	11,13	12,77	95
	2.0+2.0+2.5+5.0	1,74	1,74	2,17	4,35	---	3,92	10,00	11,29	0,67	2,34	2,75	3,05	10,71	12,59	95
	2.0+2.0+2.5+6.0	1,60	1,60	2,00	4,80	---	4,21	10,00	11,53	0,68	2,30	2,67	3,10	10,53	12,22	95
	2.0+2.0+2.5+7.1	1,47	1,47	1,84	5,22	---	4,53	10,00	11,56	0,74	2,25	2,65	3,40	10,30	12,13	95
	2.0+2.0+3.5+3.5	1,82	1,82	3,18	3,18	---	3,77	10,00	11,17	0,67	2,43	2,79	3,05	11,13	12,77	95
	2.0+2.0+3.5+4.2	1,71	1,71	2,99	3,59	---	3,98	10,00	11,17	0,71	2,41	2,79	3,27	11,03	12,77	95
	2.0+2.0+3.5+5.0	1,60	1,60	2,80	4,00	---	4,21	10,00	11,30	0,71	2,32	2,74	3,27	10,62	12,54	95
	2.0+2.0+3.5+6.0	1,48	1,48	2,59	4,44	---	4,50	10,00	11,54	0,72	2,28	2,66	3,31	10,44	12,17	95
	2.0+2.0+3.5+7.1	1,37	1,37	2,40	4,86	---	4,81	10,00	11,58	0,79	2,24	2,65	3,61	10,26	12,13	95
	2.0+2.0+4.2+4.2	1,61	1,61	3,39	3,39	---	4,18	10,00	11,18	0,73	2,40	2,79	3,36	10,99	12,77	95
	2.0+2.0+4.2+5.0	1,52	1,52	3,18	3,79	---	4,41	10,00	11,32	0,76	2,31	2,74	3,48	10,58	12,54	95
	2.0+2.0+4.2+6.0	1,41	1,41	2,96	4,23	---	4,70	10,00	11,55	0,77	2,26	2,66	3,53	10,35	12,17	95
	2.0+2.0+4.2+7.1	1,31	1,31	2,75	4,64	---	5,02	10,00	11,59	0,85	2,22	2,65	3,87	10,17	12,13	95
	2.0+2.0+5.0+5.0	1,43	1,43	3,57	3,57	---	4,64	10,00	11,45	0,79	2,29	2,70	3,61	10,49	12,36	95
	2.0+2.0+5.0+6.0	1,33	1,33	3,33	4,00	---	4,93	10,00	11,68	0,80	2,25	2,67	3,66	10,30	12,22	95
	2.0+2.5+2.5+2.5	2,11	2,63	2,63	2,63	---	3,35	10,00	11,15	0,60	2,47	2,80	2,75	11,31	12,81	95
	2.0+2.5+2.5+3.5	1,90	2,38	2,38	3,33	---	3,63	10,00	11,16	0,64	2,43	2,80	2,93	11,13	12,81	95
	2.0+2.5+2.5+4.2	1,79	2,23	2,23	3,75	---	3,84	10,00	11,17	0,69	2,41	2,79	3,14	11,03	12,77	95
	2.0+2.5+2.5+5.0	1,67	2,08	2,08	4,17	---	4,07	10,00	11,29	0,69	2,32	2,75	3,14	10,62	12,59	95
	2.0+2.5+2.5+6.0	1,54	1,92	1,92	4,62	---	4,36	10,00	11,53	0,70	2,28	2,67	3,18	10,44	12,22	95
	2.0+2.5+2.5+7.1	1,42	1,77	1,77	5,04	---	4,67	10,00	11,56	0,77	2,24	2,65	3,53	10,26	12,13	95

Notes

- The total capacity of each connected indoor unit is up to ·15.6·kW.
- The values above are for connecting with the following indoor unit types:
·1.5, 2.0, 2.5, 3.5, 4.2, 5.0, 6.0, 7.1· kW class
Wall-mounted ·FTXM-M, FTXM-N, FTXM-R· series
- Heating capacity conditions
Indoor temperature ·20·°C DB
Outdoor temperature ·7·°C DB / ·6·°C WB
- For additional information on the connection of the DHW generator for Multi and the Hybrid for Multi, see ·3D106169·.

3D105440B

4 Combination table

4 - 1 Combination Table

5MXM-N9

Heating (50Hz 230V)

Outdoor unit	Indoor unit	Heating capacity [kW]					Total capacity [kW]			Power input [kW]			Total current [A]			Power factor [%]
		Room -A-	Room -B-	Room -C-	Room -D-	Room -E-	Minimum	Nominal	Maximum	Minimum	Nominal	Maximum	Minimum	Nominal	Maximum	
5MXM90M2V1B 5MXM90N2V1B 5MXM90N2V1B9	2.0+2.5+3.5+3.5	1,74	2,17	3,04	3,04	---	3,92	10,00	11,17	0,69	2,41	2,79	3,14	11,03	12,77	95
	2.0+2.5+3.5+4.2	1,64	2,05	2,87	3,44	---	4,12	10,00	11,17	0,73	2,40	2,79	3,36	10,99	12,77	95
	2.0+2.5+3.5+5.0	1,54	1,92	2,69	3,85	---	4,36	10,00	11,30	0,73	2,31	2,74	3,36	10,58	12,54	95
	2.0+2.5+3.5+6.0	1,43	1,79	2,50	4,29	---	4,64	10,00	11,54	0,77	2,26	2,66	3,53	10,35	12,17	95
	2.0+2.5+3.5+7.1	1,32	1,66	2,32	4,70	---	4,96	10,00	11,58	0,82	2,22	2,65	3,74	10,17	12,13	95
	2.0+2.5+4.2+4.2	1,55	1,94	3,26	3,26	---	4,32	10,00	11,18	0,76	2,38	2,79	3,48	10,90	12,77	95
	2.0+2.5+4.2+5.0	1,46	1,82	3,07	3,65	---	4,55	10,00	11,32	0,79	2,29	2,74	3,61	10,49	12,54	95
	2.0+2.5+4.2+6.0	1,36	1,70	2,86	4,08	---	4,85	10,00	11,55	0,80	2,25	2,66	3,66	10,30	12,17	95
	2.0+2.5+5.0+5.0	1,38	1,72	3,45	3,45	---	4,78	10,00	11,45	0,82	2,27	2,70	3,74	10,39	12,36	95
	2.0+2.5+5.0+6.0	1,29	1,61	3,23	3,87	---	5,07	10,00	11,68	0,83	2,23	2,67	3,79	10,21	12,22	95
	2.0+3.5+3.5+3.5	1,60	2,80	2,80	2,80	---	4,21	10,00	11,17	0,73	2,41	2,79	3,36	11,03	12,77	95
	2.0+3.5+3.5+4.2	1,52	2,65	2,65	3,18	---	4,41	10,00	11,18	0,79	2,40	2,79	3,61	10,99	12,77	95
	2.0+3.5+3.5+5.0	1,43	2,50	2,50	3,57	---	4,64	10,00	11,32	0,82	2,31	2,74	3,74	10,58	12,54	95
	2.0+3.5+3.5+6.0	1,33	2,33	2,33	4,00	---	4,93	10,00	11,55	0,82	2,26	2,66	3,74	10,35	12,17	95
	2.0+3.5+4.2+4.2	1,44	2,52	3,02	3,02	---	4,61	10,00	11,19	0,84	2,38	2,78	3,83	10,90	12,72	95
	2.0+3.5+4.2+5.0	1,36	2,38	2,86	3,40	---	4,85	10,00	11,33	0,84	2,29	2,74	3,83	10,49	12,54	95
	2.0+3.5+5.0+5.0	1,29	2,26	3,23	3,23	---	5,07	10,00	11,45	0,86	2,29	2,70	3,96	10,49	12,36	95
	2.0+4.2+4.2+4.2	1,37	2,88	2,88	2,88	---	4,81	10,00	11,20	0,86	2,36	2,78	3,96	10,81	12,72	95
	2.0+4.2+4.2+5.0	1,30	2,73	2,73	3,25	---	5,04	10,00	11,34	0,89	2,27	2,73	4,09	10,39	12,49	95
	2.5+2.5+2.5+2.5	2,50	2,50	2,50	2,50	---	3,49	10,00	11,15	0,62	2,45	2,80	2,84	11,22	12,81	95
	2.5+2.5+2.5+3.5	2,27	2,27	2,27	3,18	---	3,77	10,00	11,16	0,67	2,41	2,80	3,05	11,03	12,81	95
	2.5+2.5+2.5+4.2	2,14	2,14	2,14	3,59	---	3,98	10,00	11,17	0,71	2,40	2,79	3,27	10,99	12,77	95
	2.5+2.5+2.5+5.0	2,00	2,00	2,00	4,00	---	4,21	10,00	11,29	0,71	2,31	2,75	3,27	10,58	12,59	95
	2.5+2.5+2.5+6.0	1,85	1,85	1,85	4,44	---	4,50	10,00	11,53	0,72	2,26	2,67	3,31	10,35	12,22	95
	2.5+2.5+2.5+7.1	1,71	1,71	1,71	4,86	---	4,81	10,00	11,56	0,79	2,22	2,65	3,61	10,17	12,13	95
	2.5+2.5+3.5+3.5	2,08	2,08	2,92	2,92	---	4,07	10,00	11,17	0,71	2,40	2,79	3,27	10,99	12,77	95
	2.5+2.5+3.5+4.2	1,97	1,97	2,76	3,31	---	4,26	10,00	11,17	0,76	2,38	2,79	3,48	10,90	12,77	95
	2.5+2.5+3.5+5.0	1,85	1,85	2,59	3,70	---	4,50	10,00	11,30	0,79	2,29	2,74	3,61	10,49	12,54	95
	2.5+2.5+3.5+6.0	1,72	1,72	2,41	4,14	---	4,78	10,00	11,54	0,80	2,25	2,66	3,66	10,30	12,17	95
	2.5+2.5+3.5+7.1	1,60	1,60	2,24	4,55	---	5,10	10,00	11,58	0,85	2,21	2,65	3,87	10,12	12,13	95
	2.5+2.5+4.2+4.2	1,87	1,87	3,13	3,13	---	4,47	10,00	11,18	0,79	2,36	2,79	3,61	10,81	12,77	95
	2.5+2.5+4.2+5.0	1,76	1,76	2,96	3,52	---	4,70	10,00	11,32	0,82	2,27	2,74	3,74	10,39	12,54	95
	2.5+2.5+4.2+6.0	1,64	1,64	2,76	3,95	---	4,99	10,00	11,55	0,82	2,23	2,66	3,74	10,21	12,17	95
	2.5+2.5+5.0+5.0	1,67	1,67	3,33	3,33	---	4,93	10,00	11,45	0,85	2,25	2,70	3,87	10,30	12,36	95
	2.5+3.5+3.5+3.5	1,92	2,69	2,69	2,69	---	4,36	10,00	11,17	0,79	2,40	2,79	3,61	10,99	12,77	95
	2.5+3.5+3.5+4.2	1,82	2,55	2,55	3,07	---	4,55	10,00	11,18	0,81	2,38	2,79	3,70	10,90	12,77	95
	2.5+3.5+3.5+5.0	1,72	2,41	2,41	3,45	---	4,78	10,00	11,32	0,84	2,29	2,74	3,83	10,49	12,54	95
	2.5+3.5+3.5+6.0	1,61	2,26	2,26	3,87	---	5,07	10,00	11,55	0,85	2,25	2,66	3,87	10,30	12,17	95
	2.5+3.5+4.2+4.2	1,74	2,43	2,92	2,92	---	4,75	10,00	11,19	0,86	2,36	2,78	3,96	10,81	12,72	95
	2.5+3.5+4.2+5.0	1,64	2,30	2,76	3,29	---	4,99	10,00	11,33	0,86	2,27	2,74	3,96	10,39	12,54	95
	2.5+4.2+4.2+4.2	1,66	2,78	2,78	2,78	---	4,96	10,00	11,20	0,89	2,34	2,78	4,09	10,71	12,72	95
	3.5+3.5+3.5+3.5	2,50	2,50	2,50	2,50	---	4,64	10,00	11,18	0,84	2,33	2,79	3,83	10,67	12,77	95
	3.5+3.5+3.5+4.2	2,38	2,38	2,38	2,86	---	4,85	10,00	11,19	0,86	2,31	2,78	3,96	10,58	12,72	95
	3.5+3.5+3.5+5.0	2,26	2,26	2,26	3,23	---	5,07	10,00	11,33	0,89	2,23	2,74	4,09	10,21	12,54	95

Notes

- The total capacity of each connected indoor unit is up to 15.6 kW.
- The values above are for connecting with the following indoor unit types:
2.0, 2.5, 3.5, 4.2, 5.0, 6.0, 7.1 kW class
Wall-mounted FTXM-M, FTXM-N, FTXM-R series
- Heating capacity conditions
Indoor temperature 20°C DB
Outdoor temperature 7°C DB / -6°C WB
- For additional information on the connection of the DHW generator for Multi and the Hybrid for Multi, see 3D106169.

3D105441B

4 Combination table

4 - 1 Combination Table

5MXM-N9

Heating ·(50Hz 230V)·

Outdoor unit	Indoor unit	Heating capacity [kW]					Total capacity [kW]			Power input [kW]			Total current [A]			Power factor [%]
		Room ·A·	Room ·B·	Room ·C·	Room ·D·	Room ·E·	Minimum	Nominal	Maximum	Minimum	Nominal	Maximum	Minimum	Nominal	Maximum	
5MXM90M2V1B 5MXM90N2V1B 5MXM90N2V1B9	3.5+3.5+4.2+4.2	2,27	2,27	2,73	2,73	---	5,04	10,00	11,20	0,92	2,30	2,78	4,22	10,53	12,72	95
	1.5+1.5+1.5+1.5+1.5	2,00	2,00	2,00	2,00	2,00	2,77	10,00	10,90	0,42	2,14	2,47	1,94	9,80	11,30	95
	1.5+1.5+1.5+1.5+2.0	1,88	1,88	1,88	1,88	2,50	2,92	10,00	10,90	0,44	2,13	2,47	2,02	9,75	11,30	95
	1.5+1.5+1.5+1.5+2.5	1,76	1,76	1,76	1,76	2,94	3,06	10,00	10,90	0,48	2,11	2,47	2,19	9,66	11,30	95
	1.5+1.5+1.5+1.5+3.5	1,58	1,58	1,58	1,58	3,68	3,35	10,00	11,55	0,52	2,08	2,77	2,37	9,52	12,17	95
	1.5+1.5+1.5+1.5+4.2	1,47	1,47	1,47	1,47	4,12	3,55	10,00	11,55	0,55	2,07	2,77	2,54	9,48	12,17	95
	1.5+1.5+1.5+1.5+5.0	1,36	1,36	1,36	1,36	4,55	3,77	10,00	11,69	0,56	2,00	2,78	2,58	9,16	12,22	95
	1.5+1.5+1.5+1.5+6.0	1,25	1,25	1,25	1,25	5,00	4,07	10,00	11,93	0,56	1,99	2,70	2,58	9,11	11,85	95
	1.5+1.5+1.5+1.5+7.1	1,15	1,15	1,15	1,15	5,42	4,39	10,00	11,96	0,62	1,96	2,68	2,84	8,98	11,76	95
	1.5+1.5+1.5+2.0+2.0	1,76	1,76	1,76	2,35	2,35	3,06	10,00	10,90	0,48	2,11	2,57	2,19	9,66	11,30	95
	1.5+1.5+1.5+2.0+2.5	1,67	1,67	1,67	2,22	2,78	3,20	10,00	11,54	0,50	2,10	2,77	2,28	9,62	12,17	95
	1.5+1.5+1.5+2.0+3.5	1,50	1,50	1,50	2,00	3,50	3,49	10,00	11,55	0,54	2,07	2,77	2,45	9,48	12,17	95
	1.5+1.5+1.5+2.0+4.2	1,40	1,40	1,40	1,87	3,93	3,69	10,00	11,55	0,58	2,06	2,77	2,67	9,43	12,17	95
	1.5+1.5+1.5+2.0+5.0	1,30	1,30	1,30	1,74	4,35	3,92	10,00	11,69	0,58	1,99	2,78	2,67	9,11	12,22	95
	1.5+1.5+1.5+2.0+6.0	1,20	1,20	1,20	1,60	4,80	4,21	10,00	11,93	0,61	1,96	2,70	2,80	8,98	11,85	95
	1.5+1.5+1.5+2.0+7.1	1,10	1,10	1,10	1,47	5,22	4,53	10,00	11,96	0,65	1,93	2,68	2,97	8,84	11,76	95
	1.5+1.5+1.5+2.5+2.5	1,58	1,58	1,58	2,63	2,63	3,35	10,00	11,54	0,52	2,08	2,77	2,37	9,52	12,17	95
	1.5+1.5+1.5+2.5+3.5	1,43	1,43	1,43	2,38	3,33	3,63	10,00	11,55	0,56	2,06	2,77	2,58	9,43	12,17	95
	1.5+1.5+1.5+2.5+4.2	1,34	1,34	1,34	2,23	3,75	3,84	10,00	11,55	0,60	2,04	2,77	2,75	9,34	12,17	95
	1.5+1.5+1.5+2.5+5.0	1,25	1,25	1,25	2,08	4,17	4,07	10,00	11,69	0,62	1,98	2,78	2,84	9,07	12,22	95
	1.5+1.5+1.5+2.5+6.0	1,15	1,15	1,15	1,92	4,62	4,36	10,00	11,93	0,63	1,95	2,70	2,88	8,93	11,85	95
	1.5+1.5+1.5+2.5+7.1	1,06	1,06	1,06	1,77	5,04	4,67	10,00	11,96	0,67	1,92	2,68	3,05	8,79	11,76	95
	1.5+1.5+1.5+3.5+3.5	1,30	1,30	1,30	3,04	3,04	3,92	10,00	11,55	0,62	2,04	2,77	2,84	9,34	12,17	95
	1.5+1.5+1.5+3.5+4.2	1,23	1,23	1,23	2,87	3,44	4,12	10,00	11,56	0,65	2,03	2,77	2,97	9,30	12,17	95
	1.5+1.5+1.5+3.5+5.0	1,15	1,15	1,15	2,69	3,85	4,36	10,00	11,70	0,67	1,97	2,77	3,05	9,02	12,17	95
	1.5+1.5+1.5+3.5+6.0	1,07	1,07	1,07	2,50	4,29	4,64	10,00	11,94	0,68	1,94	2,69	3,10	8,88	11,81	95
	1.5+1.5+1.5+3.5+7.1	0,99	0,99	0,99	2,32	4,70	4,96	10,00	11,97	0,74	1,91	2,68	3,40	8,75	11,76	95
	1.5+1.5+1.5+4.2+4.2	1,16	1,16	1,16	3,26	3,26	4,32	10,00	11,58	0,69	2,02	2,76	3,14	9,25	12,13	95
	1.5+1.5+1.5+4.2+5.0	1,09	1,09	1,09	3,07	3,65	4,55	10,00	11,71	0,71	1,97	2,77	3,27	9,02	12,17	95
	1.5+1.5+1.5+4.2+6.0	1,02	1,02	1,02	2,86	4,08	4,85	10,00	11,95	0,72	1,91	2,69	3,31	8,75	11,81	95
	1.5+1.5+1.5+5.0+5.0	1,03	1,03	1,03	3,45	3,45	4,78	10,00	11,84	0,71	1,90	2,73	3,27	8,70	11,95	95
	1.5+1.5+1.5+5.0+6.0	0,97	0,97	0,97	3,23	3,87	5,07	10,00	12,07	0,74	1,87	2,64	3,40	8,56	11,58	95
	1.5+1.5+2.0+2.0+2.0	1,67	1,67	2,22	2,22	2,22	3,20	10,00	11,54	0,50	2,10	2,77	2,28	9,62	12,17	95
	1.5+1.5+2.0+2.0+2.5	1,58	1,58	2,11	2,11	2,63	3,35	10,00	11,54	0,52	2,09	2,77	2,37	9,57	12,17	95
	1.5+1.5+2.0+2.0+3.5	1,43	1,43	1,90	1,90	3,33	3,63	10,00	11,55	0,56	2,09	2,77	2,58	9,57	12,17	95
	1.5+1.5+2.0+2.0+4.2	1,34	1,34	1,79	1,79	3,75	3,84	10,00	11,55	0,60	2,08	2,77	2,75	9,52	12,17	95
	1.5+1.5+2.0+2.0+5.0	1,25	1,25	1,67	1,67	4,17	4,07	10,00	11,69	0,62	2,07	2,78	2,84	9,48	12,22	95
	1.5+1.5+2.0+2.0+6.0	1,15	1,15	1,54	1,54	4,62	4,36	10,00	11,93	0,63	2,07	2,70	2,88	9,48	11,85	95
	1.5+1.5+2.0+2.0+7.1	1,06	1,06	1,42	1,42	5,04	4,67	10,00	11,96	0,67	2,06	2,68	3,05	9,43	11,76	95
	1.5+1.5+2.0+2.5+2.5	1,50	1,50	2,00	2,50	2,50	3,49	10,00	11,54	0,55	2,09	2,77	2,50	9,57	12,17	95
	1.5+1.5+2.0+2.5+3.5	1,36	1,36	1,82	2,27	3,18	3,77	10,00	11,55	0,58	2,08	2,77	2,67	9,52	12,17	95
	1.5+1.5+2.0+2.5+4.2	1,28	1,28	1,71	2,14	3,59	3,98	10,00	11,55	0,62	2,08	2,77	2,84	9,52	12,17	95
	1.5+1.5+2.0+2.5+5.0	1,20	1,20	1,60	2,00	4,00	4,21	10,00	11,69	0,65	2,07	2,78	2,97	9,48	12,22	95
	1.5+1.5+2.0+2.5+6.0	1,11	1,11	1,48	1,85	4,44	4,50	10,00	11,93	0,65	2,03	2,70	2,97	9,30	11,85	95

Notes

- The total capacity of each connected indoor unit is up to ·15.6·kW.
- The values above are for connecting with the following indoor unit types:
·1.5, 2.0, 2.5, 3.5, 4.2, 5.0, 6.0, 7.1· kW class
Wall-mounted ·FTXM-M, FTXM-N, FTXM-R· series
- Heating capacity conditions
Indoor temperature ·20·°C DB
Outdoor temperature ·7·°C DB / ·6·°C WB
- For additional information on the connection of the DHW generator for Multi and the Hybrid for Multi, see ·3D106169·.

3D105442B

4 Combination table

4 - 1 Combination Table

5MXM-N9

Heating (50Hz 230V)

Outdoor unit	Indoor unit	Heating capacity [kW]					Total capacity [kW]			Power input [kW]			Total current [A]			Power factor [%]
		Room ·A·	Room ·B·	Room ·C·	Room ·D·	Room ·E·	Minimum	Nominal	Maximum	Minimum	Nominal	Maximum	Minimum	Nominal	Maximum	
5MXM90M2V1B 5MXM90N2V1B 5MXM90N2V1B9	1.5+1.5+2.0+2.5+7.1	1,03	1,03	1,37	1,71	4,86	4,81	10,00	11,96	0,71	2,02	2,68	3,27	9,25	11,76	95
	1.5+1.5+2.0+3.5+3.5	1,25	1,25	1,67	2,92	2,92	4,07	10,00	11,55	0,65	2,08	2,77	2,97	9,52	12,17	95
	1.5+1.5+2.0+3.5+4.2	1,18	1,18	1,57	2,76	3,31	4,26	10,00	11,56	0,67	2,07	2,77	3,05	9,48	12,17	95
	1.5+1.5+2.0+3.5+5.0	1,11	1,11	1,48	2,59	3,70	4,50	10,00	11,70	0,70	2,06	2,77	3,18	9,43	12,17	95
	1.5+1.5+2.0+3.5+6.0	1,03	1,03	1,38	2,41	4,14	4,78	10,00	11,94	0,70	2,02	2,69	3,18	9,25	11,81	95
	1.5+1.5+2.0+3.5+7.1	0,96	0,96	1,28	2,24	4,55	5,10	10,00	11,97	0,76	1,99	2,68	3,48	9,11	11,76	95
	1.5+1.5+2.0+4.2+4.2	1,12	1,12	1,49	3,13	3,13	4,47	10,00	11,58	0,71	2,07	2,76	3,27	9,48	12,13	95
	1.5+1.5+2.0+4.2+5.0	1,06	1,06	1,41	2,96	3,52	4,70	10,00	11,71	0,74	2,06	2,77	3,40	9,43	12,17	95
	1.5+1.5+2.0+4.2+6.0	0,99	0,99	1,32	2,76	3,95	4,99	10,00	11,95	0,74	2,05	2,69	3,40	9,39	11,81	95
	1.5+1.5+2.0+5.0+5.0	1,00	1,00	1,33	3,33	3,33	4,93	10,00	11,84	0,77	2,00	2,73	3,53	9,16	11,95	95
	1.5+1.5+2.5+2.5+2.5	1,43	1,43	2,38	2,38	2,38	3,63	10,00	11,54	0,56	2,08	2,77	2,58	9,52	12,17	95
	1.5+1.5+2.5+2.5+3.5	1,30	1,30	2,17	2,17	3,04	3,92	10,00	11,55	0,63	2,07	2,77	2,88	9,48	12,17	95
	1.5+1.5+2.5+2.5+4.2	1,23	1,23	2,05	2,05	3,44	4,12	10,00	11,55	0,65	2,07	2,77	2,97	9,48	12,17	95
	1.5+1.5+2.5+2.5+5.0	1,15	1,15	1,92	1,92	3,85	4,36	10,00	11,69	0,67	2,06	2,78	3,05	9,43	12,22	95
	1.5+1.5+2.5+2.5+6.0	1,07	1,07	1,79	1,79	4,29	4,64	10,00	11,93	0,68	2,05	2,70	3,10	9,39	11,85	95
	1.5+1.5+2.5+2.5+7.1	0,99	0,99	1,66	1,66	4,70	4,96	10,00	11,96	0,74	2,05	2,57	3,40	9,39	11,76	95
	1.5+1.5+3.5+3.5+3.5	1,20	1,20	2,00	2,80	2,80	4,21	10,00	11,55	0,67	2,07	2,77	3,05	9,48	12,17	95
	1.5+1.5+2.5+3.5+4.2	1,14	1,14	1,89	2,65	3,18	4,41	10,00	11,56	0,71	2,07	2,77	3,27	9,48	12,17	95
	1.5+1.5+2.5+3.5+5.0	1,07	1,07	1,79	2,50	3,57	4,64	10,00	11,70	0,71	2,05	2,77	3,27	9,39	12,17	95
	1.5+1.5+2.5+3.5+6.0	1,00	1,00	1,67	2,33	4,00	4,93	10,00	11,94	0,74	2,05	2,69	3,40	9,39	11,81	95
	1.5+1.5+2.5+4.2+4.2	1,08	1,08	1,80	3,02	3,02	4,61	10,00	11,58	0,74	2,06	2,75	3,40	9,43	12,13	95
	1.5+1.5+2.5+4.2+5.0	1,02	1,02	1,70	2,86	3,40	4,85	10,00	11,71	0,77	2,05	2,77	3,53	9,39	12,17	95
	1.5+1.5+2.5+5.0+5.0	0,97	0,97	1,61	3,23	3,23	5,07	10,00	11,84	0,79	2,00	2,73	3,61	9,16	11,95	95
	1.5+1.5+3.5+3.5+3.5	1,11	1,11	2,59	2,59	2,59	4,50	10,00	11,56	0,71	2,05	2,77	3,27	9,39	12,17	95
	1.5+1.5+3.5+3.5+4.2	1,06	1,06	2,46	2,46	2,96	4,70	10,00	11,58	0,76	2,04	2,76	3,48	9,34	12,13	95
	1.5+1.5+3.5+3.5+5.0	1,00	1,00	2,33	2,33	3,33	4,93	10,00	11,71	0,79	2,03	2,77	3,61	9,30	12,17	95
	1.5+1.5+3.5+4.2+4.2	1,01	1,01	2,35	2,82	2,82	4,90	10,00	11,59	0,82	2,04	2,76	3,74	9,34	12,13	95
	1.5+2.0+2.0+2.0+2.0	1,58	2,11	2,11	2,11	2,11	3,35	10,00	11,54	0,52	2,07	2,77	2,37	9,48	12,17	95
	1.5+2.0+2.0+2.0+2.5	1,50	2,00	2,00	2,00	2,50	3,49	10,00	11,54	0,55	2,07	2,77	2,50	9,48	12,17	95
	1.5+2.0+2.0+2.0+3.5	1,36	1,82	1,82	1,82	3,18	3,77	10,00	11,55	0,58	2,06	2,77	2,67	9,43	12,17	95
	1.5+2.0+2.0+2.0+4.2	1,28	1,71	1,71	1,71	3,59	3,98	10,00	11,55	0,62	2,06	2,77	2,84	9,43	12,17	95
	1.5+2.0+2.0+2.0+5.0	1,20	1,60	1,60	1,60	4,00	4,21	10,00	11,69	0,65	2,05	2,78	2,97	9,39	12,22	95
	1.5+2.0+2.0+2.0+6.0	1,11	1,48	1,48	1,48	4,44	4,50	10,00	11,70	0,65	2,04	2,65	2,97	9,34	12,13	95
	1.5+2.0+2.0+2.0+7.1	1,03	1,37	1,37	1,37	4,86	4,81	10,00	11,71	0,71	2,00	2,66	3,27	9,16	12,17	95
	1.5+2.0+2.0+2.5+2.5	1,43	1,90	1,90	2,38	2,38	3,63	10,00	11,54	0,56	2,07	2,61	2,58	9,48	11,95	95
	1.5+2.0+2.0+2.5+3.5	1,30	1,74	1,74	2,17	3,04	3,92	10,00	11,56	0,63	2,06	2,66	2,88	9,43	12,17	95
	1.5+2.0+2.0+2.5+4.2	1,23	1,64	1,64	2,05	3,44	4,12	10,00	11,58	0,65	2,05	2,65	2,97	9,39	12,13	95
	1.5+2.0+2.0+2.5+5.0	1,15	1,54	1,54	1,92	3,85	4,36	10,00	11,71	0,67	2,04	2,66	3,05	9,34	12,17	95
	1.5+2.0+2.0+2.5+6.0	1,07	1,43	1,43	1,79	4,29	4,64	10,00	11,72	0,68	2,04	2,65	3,10	9,34	12,13	95
	1.5+2.0+2.0+2.5+7.1	0,99	1,32	1,32	1,66	4,70	4,96	10,00	11,54	0,74	2,00	2,66	3,40	9,16	12,17	95
	1.5+2.0+2.0+3.5+3.5	1,20	1,60	1,60	2,80	2,80	4,21	10,00	11,53	0,67	2,05	2,66	3,05	9,39	12,17	95
	1.5+2.0+2.0+3.5+4.2	1,14	1,52	1,52	2,65	3,18	4,41	10,00	11,55	0,71	2,05	2,66	3,27	9,39	12,17	95
	1.5+2.0+2.0+3.5+5.0	1,07	1,43	1,43	2,50	3,57	4,64	10,00	11,56	0,71	2,04	2,66	3,27	9,34	12,22	95
	1.5+2.0+2.0+3.5+6.0	1,00	1,33	1,33	2,33	4,00	4,93	10,00	11,69	0,74	2,00	2,67	3,40	9,16	12,13	95

Notes

1. The total capacity of each connected indoor unit is up to ·15.6·kW.
2. The values above are for connecting with the following indoor unit types:
·1.5, 2.0, 2.5, 3.5, 4.2, 5.0, 6.0, 7.1· kW class
Wall-mounted ·FTXM-M, FTXM-N, FTXM-R· series
3. Heating capacity conditions
Indoor temperature ·20·°C DB
Outdoor temperature ·7·°C DB / ·6·°C WB
4. For additional information on the connection of the DHW generator for Multi and the Hybrid for Multi, see ·3D106169·.

3D105443B

4 Combination table

4 - 1 Combination Table

5MXM-N9

4

Heating (50Hz 230V)-

Outdoor unit	Indoor unit	Heating capacity [kW]					Total capacity [kW]			Power input [kW]			Total current [A]			Power factor [%]
		Room -A-	Room -B-	Room -C-	Room -D-	Room -E-	Minimum	Nominal	Maximum	Minimum	Nominal	Maximum	Minimum	Nominal	Maximum	
5MXM90M2V1B 5MXM90N2V1B 5MXM90N2V1B9	1.5+2.0+2.0+4.2+4.2	1,08	1,44	1,44	3,02	3,02	4,61	10,00	11,58	0,74	2,05	2,76	3,40	9,39	12,17	95
	1.5+2.0+2.0+4.2+5.0	1,02	1,36	1,36	2,86	3,40	4,85	10,00	11,71	0,77	2,03	2,77	3,53	9,30	11,95	95
	1.5+2.0+2.0+5.0+5.0	0,97	1,29	1,29	3,23	3,23	5,07	10,00	11,84	0,79	2,00	2,73	3,61	9,16	12,17	95
	1.5+2.0+2.5+2.5+2.5	1,36	1,82	2,27	2,27	2,27	3,77	10,00	11,54	0,58	2,07	2,77	2,67	9,48	12,17	95
	1.5+2.0+2.5+2.5+3.5	1,25	1,67	2,08	2,08	2,92	4,07	10,00	11,55	0,65	2,06	2,77	2,97	9,43	12,17	95
	1.5+2.0+2.5+2.5+4.2	1,18	1,57	1,97	1,97	3,31	4,26	10,00	11,55	0,67	2,05	2,77	3,05	9,39	12,17	95
	1.5+2.0+2.5+2.5+5.0	1,11	1,48	1,85	1,85	3,70	4,50	10,00	11,69	0,70	2,04	2,78	3,18	9,34	12,22	95
	1.5+2.0+2.5+2.5+6.0	1,03	1,38	1,72	1,72	4,14	4,78	10,00	11,93	0,70	2,04	2,70	3,18	9,34	11,85	95
	1.5+2.0+2.5+2.5+7.1	0,96	1,28	1,60	1,60	4,55	5,10	10,00	11,96	0,77	2,00	2,68	3,53	9,16	11,76	95
	1.5+2.0+2.5+3.5+3.5	1,15	1,54	1,92	2,69	2,69	4,36	10,00	11,55	0,70	2,05	2,77	3,18	9,39	12,17	95
	1.5+2.0+2.5+3.5+4.2	1,09	1,46	1,82	2,55	3,07	4,55	10,00	11,56	0,74	2,05	2,77	3,40	9,39	12,17	95
	1.5+2.0+2.5+3.5+5.0	1,03	1,38	1,72	2,41	3,45	4,78	10,00	11,70	0,77	2,04	2,77	3,53	9,34	12,17	95
	1.5+2.0+2.5+3.5+6.0	0,97	1,29	1,61	2,26	3,87	5,07	10,00	11,94	0,77	2,00	2,69	3,53	9,16	12,17	95
	1.5+2.0+2.5+4.2+4.2	1,04	1,39	1,74	2,92	2,92	4,75	10,00	11,58	0,76	2,05	2,76	3,48	9,39	12,13	95
	1.5+2.0+2.5+4.2+5.0	0,99	1,32	1,64	2,76	3,29	4,99	10,00	11,71	0,79	1,99	2,77	3,61	9,11	12,17	95
	1.5+2.0+3.5+3.5+3.5	1,07	1,43	2,50	2,50	2,50	4,64	10,00	11,56	0,77	2,05	2,77	3,53	9,39	12,17	95
	1.5+2.0+3.5+3.5+4.2	1,02	1,36	2,38	2,38	2,86	4,85	10,00	11,58	0,79	2,05	2,76	3,61	9,39	12,13	95
	1.5+2.0+3.5+3.5+5.0	0,97	1,29	2,26	2,26	3,23	5,07	10,00	11,71	0,82	2,00	2,77	3,74	9,16	12,17	95
	1.5+2.0+3.5+4.2+4.2	0,97	1,30	2,27	2,73	2,73	5,04	10,00	11,59	0,85	2,04	2,76	3,87	9,34	12,13	95
	1.5+2.5+2.5+2.5+2.5	1,30	2,17	2,17	2,17	2,17	3,92	10,00	11,54	0,63	2,06	2,77	2,88	9,43	12,17	95
	1.5+2.5+2.5+2.5+3.5	1,20	2,00	2,00	2,00	2,80	4,21	10,00	11,55	0,67	2,03	2,77	3,05	9,30	12,17	95
	1.5+2.5+2.5+2.5+4.2	1,14	1,89	1,89	1,89	3,18	4,41	10,00	11,55	0,71	2,03	2,77	3,27	9,30	12,17	95
	1.5+2.5+2.5+2.5+5.0	1,07	1,79	1,79	1,79	3,57	4,64	10,00	11,69	0,71	1,98	2,78	3,27	9,07	12,22	95
	1.5+2.5+2.5+2.5+6.0	1,00	1,67	1,67	1,67	4,00	4,93	10,00	11,93	0,75	1,98	2,70	3,44	9,07	11,85	95
	1.5+2.5+2.5+3.5+3.5	1,11	1,85	1,85	2,59	2,59	4,50	10,00	11,55	0,71	2,03	2,77	3,27	9,30	12,17	95
	1.5+2.5+2.5+3.5+4.2	1,06	1,76	1,76	2,46	2,96	4,70	10,00	11,56	0,77	2,02	2,77	3,53	9,25	12,17	95
	1.5+2.5+2.5+3.5+5.0	1,00	1,67	1,67	2,33	3,33	4,93	10,00	11,70	0,79	1,97	2,77	3,61	9,02	12,17	95
	1.5+2.5+2.5+4.2+4.2	1,01	1,68	1,68	2,82	2,82	4,90	10,00	11,58	0,82	2,02	2,76	3,74	9,25	12,13	95
	1.5+2.5+3.5+3.5+3.5	1,03	1,72	2,41	2,41	2,41	4,78	10,00	11,56	0,79	2,02	2,77	3,61	9,25	12,17	95
	1.5+2.5+3.5+3.5+4.2	0,99	1,64	2,30	2,30	2,76	4,99	10,00	11,58	0,82	2,02	2,76	3,74	9,25	12,13	95
	1.5+3.5+3.5+3.5+3.5	0,97	2,26	2,26	2,26	2,26	5,07	10,00	11,58	0,85	2,00	2,76	3,87	9,16	12,13	95
	2.0+2.0+2.0+2.0+2.0	2,00	2,00	2,00	2,00	2,00	3,49	10,00	11,54	0,55	2,05	2,77	2,50	9,39	12,17	95
	2.0+2.0+2.0+2.0+2.5	1,90	1,90	1,90	1,90	2,38	3,63	10,00	11,54	0,56	2,05	2,77	2,58	9,39	12,17	95
	2.0+2.0+2.0+2.0+3.5	1,74	1,74	1,74	1,74	3,04	3,92	10,00	11,55	0,63	2,04	2,77	2,88	9,34	12,17	95
	2.0+2.0+2.0+2.0+4.2	1,64	1,64	1,64	1,64	3,44	4,12	10,00	11,55	0,65	2,03	2,77	2,97	9,30	12,17	95
	2.0+2.0+2.0+2.0+5.0	1,54	1,54	1,54	1,54	3,85	4,36	10,00	11,69	0,67	2,00	2,78	3,05	9,16	12,22	95
	2.0+2.0+2.0+2.0+6.0	1,43	1,43	1,43	1,43	4,29	4,64	10,00	11,93	0,68	1,99	2,70	3,10	9,11	11,85	95
	2.0+2.0+2.0+2.0+7.1	1,32	1,32	1,32	1,32	4,70	4,96	10,00	11,96	0,74	1,99	2,68	3,40	9,11	11,76	95
	2.0+2.0+2.0+2.5+2.5	1,82	1,82	1,82	2,27	2,27	3,77	10,00	11,54	0,58	2,04	2,77	2,67	9,34	12,17	95
	2.0+2.0+2.0+2.5+3.5	1,67	1,67	1,67	2,08	2,92	4,07	10,00	11,55	0,65	2,03	2,77	2,97	9,30	12,17	95
	2.0+2.0+2.0+2.5+4.2	1,57	1,57	1,57	1,97	3,31	4,26	10,00	11,55	0,67	2,03	2,77	3,05	9,30	12,17	95
	2.0+2.0+2.0+2.5+5.0	1,48	1,48	1,48	1,85	3,70	4,50	10,00	11,69	0,70	1,99	2,78	3,18	9,11	12,22	95
	2.0+2.0+2.0+2.5+6.0	1,38	1,38	1,38	1,72	4,14	4,78	10,00	11,93	0,70	1,99	2,70	3,18	9,11	11,85	95
	2.0+2.0+2.0+2.5+7.1	1,28	1,28	1,28	1,60	4,55	5,10	10,00	11,96	0,77	1,98	2,68	3,53	9,07	11,76	95

Notes

- The total capacity of each connected indoor unit is up to ·15.6-kW.
- The values above are for connecting with the following indoor unit types:
·1.5, 2.0, 2.5, 3.5, 4.2, 5.0, 6.0, 7.1· kW class
Wall-mounted ·FTXM-M, FTXM-N, FTXM-R· series
- Heating capacity conditions
Indoor temperature ·20·°C DB
Outdoor temperature ·7·°C DB / ·6·°C WB
- For additional information on the connection of the DHW generator for Multi and the Hybrid for Multi, see ·3D106169·.

3D105444B

4 Combination table

4 - 1 Combination Table

5MXM-N9

Heating ·(50Hz 230V)·

Outdoor unit	Indoor unit	Heating capacity [kW]					Total capacity [kW]			Power input [kW]			Total current [A]			Power factor [%]
		Room ·A·	Room ·B·	Room ·C·	Room ·D·	Room ·E·	Minimum	Nominal	Maximum	Minimum	Nominal	Maximum	Minimum	Nominal	Maximum	
5MXM90M2V1B 5MXM90N2V1B 5MXM90N2V1B9	2.0+2.0+2.0+3.5+3.5	1,54	1,54	1,54	2,69	2,69	3,77	10,00	11,54	0,58	2,03	2,77	2,67	9,30	12,17	95
	2.0+2.0+2.0+3.5+4.2	1,46	1,46	1,46	2,55	3,07	4,55	10,00	11,56	0,74	2,03	2,77	3,40	9,30	12,17	95
	2.0+2.0+2.0+3.5+5.0	1,38	1,38	1,38	2,41	3,45	4,78	10,00	11,70	0,77	1,99	2,77	3,53	9,11	12,17	95
	2.0+2.0+2.0+3.5+6.0	1,29	1,29	1,29	2,26	3,87	5,07	10,00	11,94	0,77	1,99	2,69	3,53	9,11	11,81	95
	2.0+2.0+2.0+4.2+4.2	1,39	1,39	1,39	2,92	2,92	4,75	10,00	11,58	0,76	2,02	2,76	3,48	9,25	12,13	95
	2.0+2.0+2.0+4.2+5.0	1,32	1,32	1,32	2,76	3,29	4,99	10,00	11,71	0,79	2,01	2,83	3,61	9,20	12,40	95
	2.0+2.0+2.5+2.5+2.5	1,74	1,74	2,17	2,17	2,17	3,92	10,00	11,54	0,63	2,04	2,77	2,88	9,34	12,17	95
	2.0+2.0+2.5+2.5+3.5	1,60	1,60	2,00	2,00	2,80	4,21	10,00	11,55	0,67	2,03	2,77	3,05	9,30	12,17	95
	2.0+2.0+2.5+2.5+4.2	1,52	1,52	1,89	1,89	3,18	4,41	10,00	11,55	0,70	2,03	2,77	3,18	9,30	12,17	95
	2.0+2.0+2.5+2.5+5.0	1,43	1,43	1,79	1,79	3,57	4,64	10,00	11,69	0,71	1,99	2,78	3,27	9,11	12,22	95
	2.0+2.0+2.5+2.5+6.0	1,33	1,33	1,67	1,67	4,00	4,93	10,00	11,93	0,75	1,99	2,70	3,44	9,11	11,85	95
	2.0+2.0+2.5+3.5+3.5	1,48	1,48	1,85	2,59	2,59	4,50	10,00	11,55	0,71	1,99	2,77	3,27	9,11	12,17	95
	2.0+2.0+2.5+3.5+4.2	1,41	1,41	1,76	2,46	2,96	4,70	10,00	11,56	0,77	1,99	2,77	3,53	9,11	12,17	95
	2.0+2.0+2.5+3.5+5.0	1,33	1,33	1,67	2,33	3,33	4,93	10,00	11,70	0,79	1,98	2,77	3,61	9,07	12,17	95
	2.0+2.0+2.5+4.2+4.2	1,34	1,34	1,68	2,82	2,82	4,90	10,00	11,58	0,82	1,99	2,82	3,74	9,11	12,36	95
	2.0+2.0+3.5+3.5+3.5	1,38	1,38	2,41	2,41	2,41	4,78	10,00	11,56	0,79	1,99	2,77	3,61	9,11	12,17	95
	2.0+2.0+3.5+3.5+4.2	1,32	1,32	2,30	2,30	2,76	4,99	10,00	11,58	0,82	1,99	2,82	3,74	9,11	12,36	95
	2.0+2.5+2.5+2.5+2.5	1,67	2,08	2,08	2,08	2,08	4,07	10,00	11,54	0,65	2,03	2,77	2,97	9,30	12,17	95
	2.0+2.5+2.5+2.5+3.5	1,54	1,92	1,92	1,92	2,69	4,36	10,00	11,55	0,70	2,03	2,77	3,18	9,30	12,17	95
	2.0+2.5+2.5+2.5+4.2	1,46	1,82	1,82	1,82	3,07	4,55	10,00	11,55	0,74	2,02	2,77	3,40	9,25	12,17	95
	2.0+2.5+2.5+2.5+5.0	1,38	1,72	1,72	1,72	3,45	4,78	10,00	11,69	0,77	1,99	2,78	3,53	9,11	12,22	95
	2.0+2.5+2.5+2.5+6.0	1,29	1,61	1,61	1,61	3,87	5,07	10,00	11,93	0,77	1,98	2,70	3,53	9,07	11,85	95
	2.0+2.5+2.5+3.5+3.5	1,43	1,79	1,79	2,50	2,50	4,64	10,00	11,55	0,77	1,99	2,77	3,53	9,11	12,17	95
	2.0+2.5+2.5+3.5+4.2	1,36	1,70	1,70	2,38	2,86	4,85	10,00	11,56	0,79	1,99	2,77	3,61	9,11	12,17	95
	2.0+2.5+2.5+3.5+5.0	1,29	1,61	1,61	2,26	3,23	5,07	10,00	11,70	0,82	1,98	2,77	3,74	9,07	12,17	95
	2.0+2.5+2.5+4.2+4.2	1,30	1,62	1,62	2,73	2,73	5,04	10,00	11,58	0,85	1,99	2,82	3,87	9,11	12,36	95
	2.0+2.5+3.5+3.5+3.5	1,33	1,67	2,33	2,33	2,33	4,93	10,00	11,56	0,82	1,99	2,77	3,74	9,11	12,17	95
	2.5+2.5+2.5+2.5+2.5	2,00	2,00	2,00	2,00	2,00	4,21	10,00	11,54	0,68	2,03	2,77	3,10	9,30	12,17	95
	2.5+2.5+2.5+2.5+3.5	1,85	1,85	1,85	1,85	2,59	4,50	10,00	11,55	0,72	2,02	2,66	3,31	9,25	12,17	95
	2.5+2.5+2.5+2.5+4.2	1,76	1,76	1,76	1,76	2,96	4,70	10,00	11,55	0,77	2,02	2,66	3,53	9,25	12,17	95
	2.5+2.5+2.5+2.5+5.0	1,67	1,67	1,67	1,67	3,33	4,93	10,00	11,69	0,80	2,00	2,67	3,66	9,16	12,22	95
	2.5+2.5+2.5+3.5+3.5	1,72	1,72	1,72	2,41	2,41	4,78	10,00	11,55	0,80	2,02	2,66	3,66	9,25	12,17	95
	2.5+2.5+2.5+3.5+4.2	1,64	1,64	1,64	2,30	2,76	4,99	10,00	11,56	0,82	2,01	2,66	3,74	9,20	12,17	95
	2.5+2.5+3.5+3.5+3.5	1,61	1,61	2,26	2,26	2,26	5,07	10,00	11,57	0,85	1,99	2,66	3,87	9,11	12,17	95

Notes

1. The total capacity of each connected indoor unit is up to ·15.6·kW.
2. The values above are for connecting with the following indoor unit types:
·2.0, 2.5, 3.5, 4.2, 5.0, 6.0· kW class
Wall-mounted ·FTXM-M, FTXM-N, FTXM-R· series
3. Heating capacity conditions
Indoor temperature ·20·°C DB
Outdoor temperature ·7·°C DB / ·6·°C WB
4. For additional information on the connection of the DHW generator for Multi and the Hybrid for Multi, see ·3D106169·.

3D105445B


5 Capacity tables

5 - 1 Capacity Table Legend

In order to fulfill more your requirements on quick access of data in the format you require, we have developed a tool to consult capacity tables.

Below you can find the link to the capacity table database and an overview of all the tools we have to help you select the correct product:

- **Capacity table database:** lets you find back and export quickly the capacity information you are looking for based upon unit model, refrigerant temperature and connection ratio.
- You can access the capacity table viewer here:
https://my.daikin.eu/content/denv/en_US/home/applications/software-finder/capacity-table-viewer.html




- An overview of **all software tools** that we offer can be found here:
https://my.daikin.eu/denv/en_US/home/applications/software-finder.html



6 Dimensional drawings

6 - 1 Dimensional Drawings

5MXM-N9

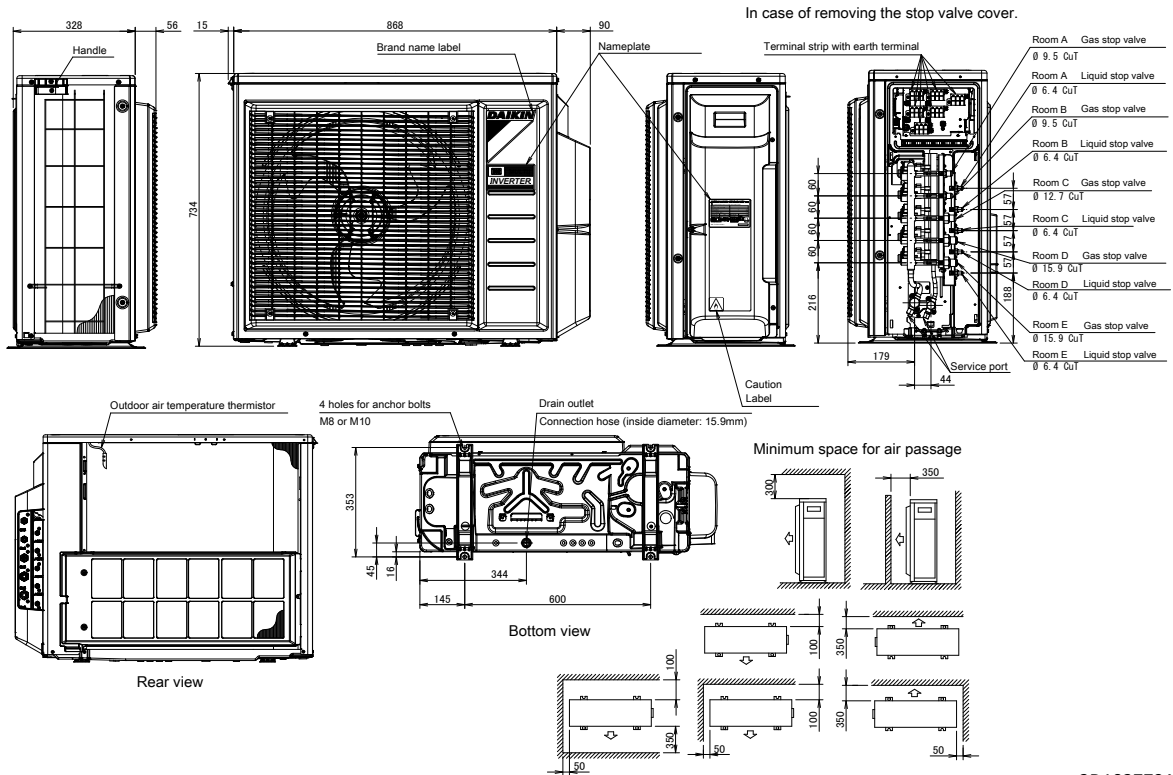


3D102779A

7 Centre of gravity

7 - 1 Centre of Gravity


5MXM-N9

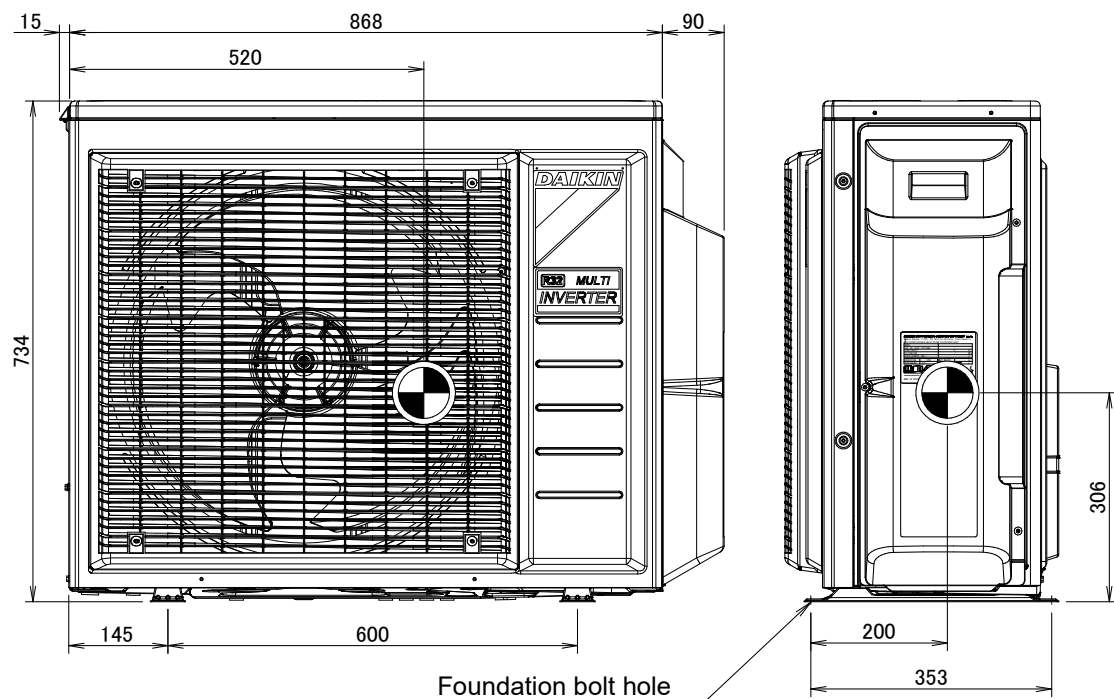

4D102821B

8 - 1 Piping Diagrams


8

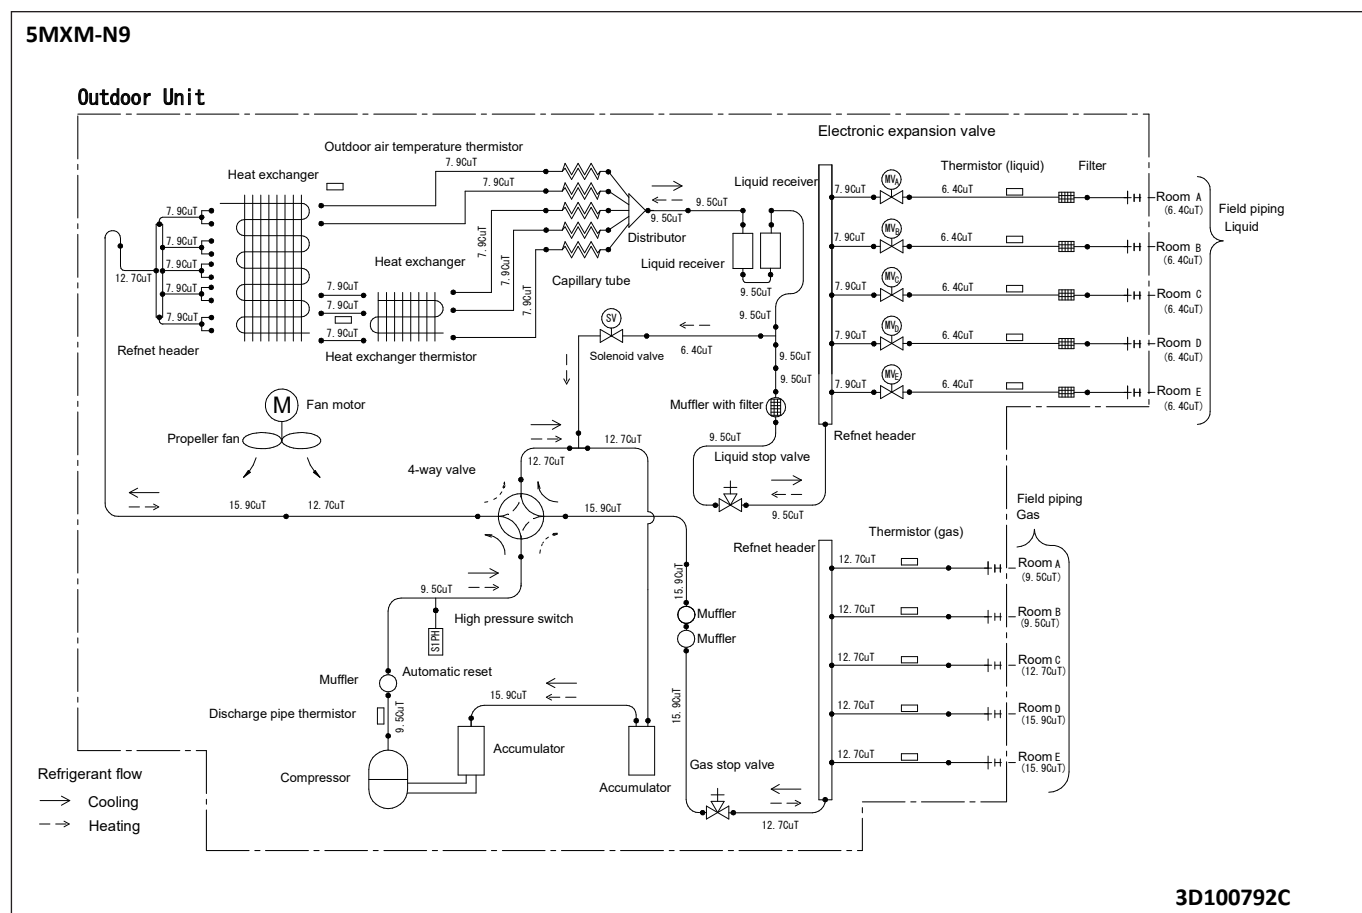

9 Wiring diagrams

9 - 1 Wiring Diagrams - Single Phase

5MXM-N9

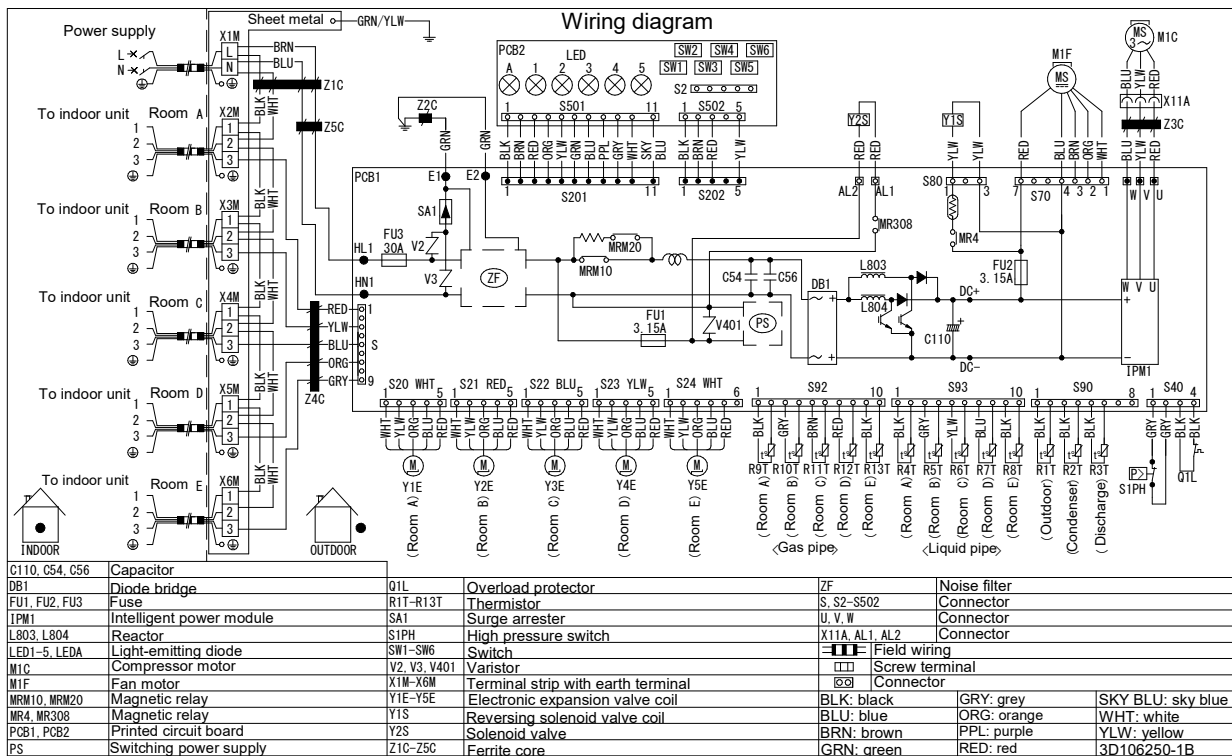


3D106250B

10 Sound data

10 - 1 Sound Pressure Spectrum


5MXM-N9

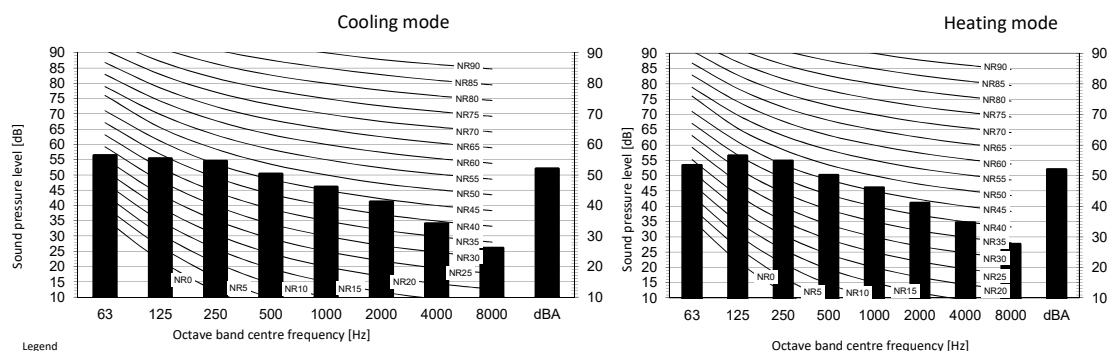

A Scale

B Fan speed: High

Location of microphone



Cooling Total dB

A	B
dBA	52

Notes

- Operating conditions: power source 220-240 V/220 V 50/60 Hz; JIS standard
- Background noise already taken into account.
- Operating noise varies depending on operation and ambient conditions.
- The operation noise measuring method is in accordance with JISC9612.
- Measuring location: anechoic chamber
- The values above are for connecting with the following indoor unit types:
1.5, 2.0, 2.5, 3.5, 4.2, 5.0, 6.0, 7.1 kW Class

Heating Total dB



A	B
dBA	52

3D106226B

11 Operation range

11 - 1 Operation Range

5MXM-N9

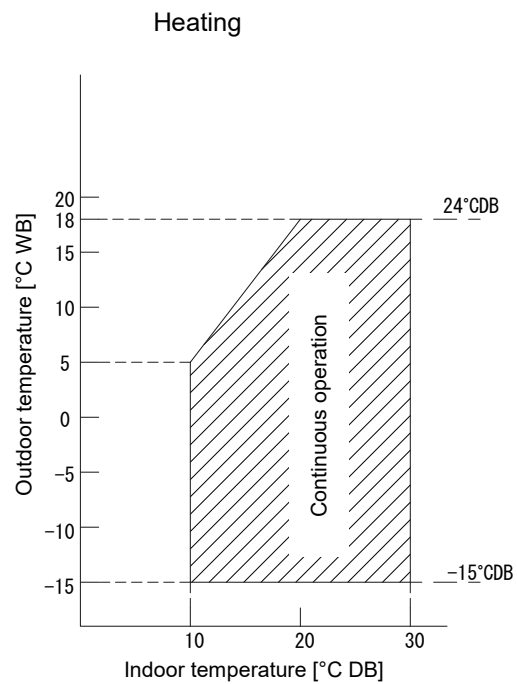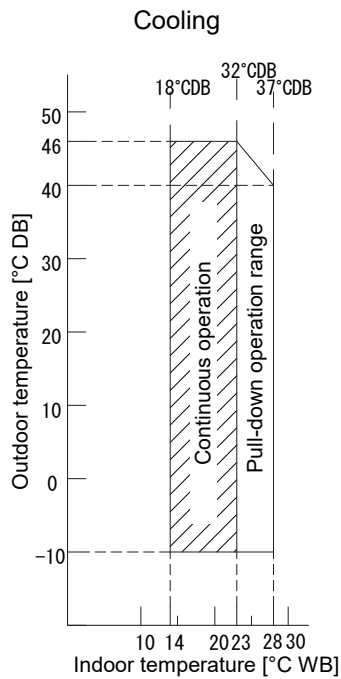

Notes

- The graph is based on the following conditions.
Corresponding refrigerant piping length: 5 m
Level difference: 0 m
Air flow rate High

3D101376D


11 Operation range

11 - 1 Operation Range


11

5MXM-N9


Hybrid unit operation only

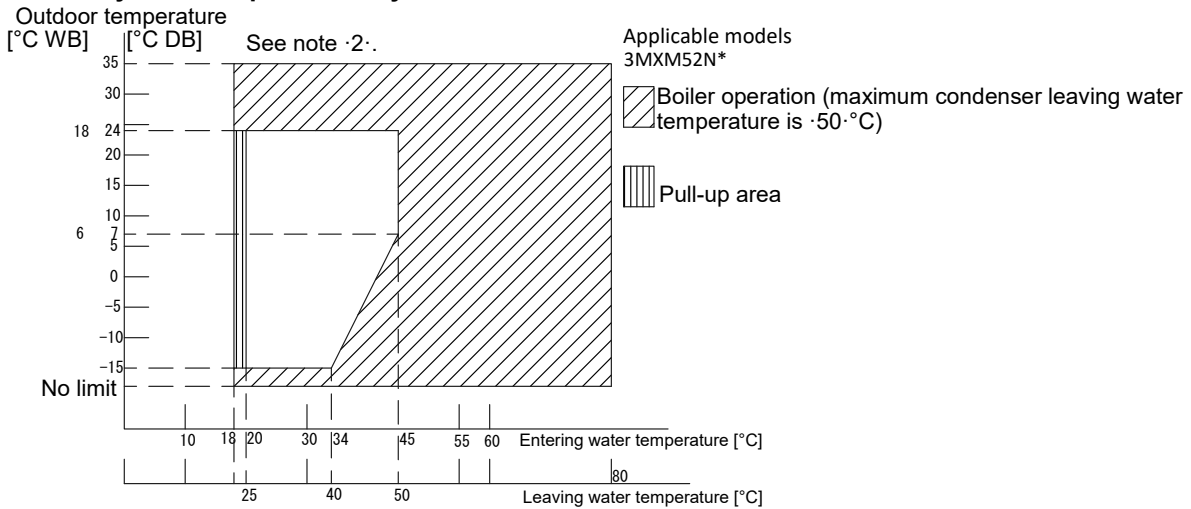

Hybrid unit operation only

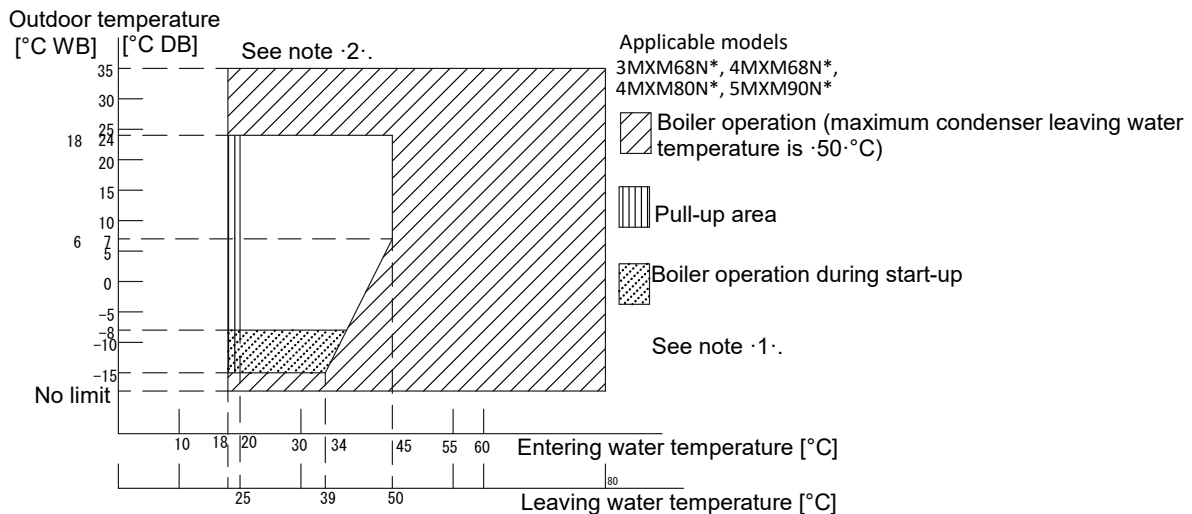

Domestic hot water heating mode

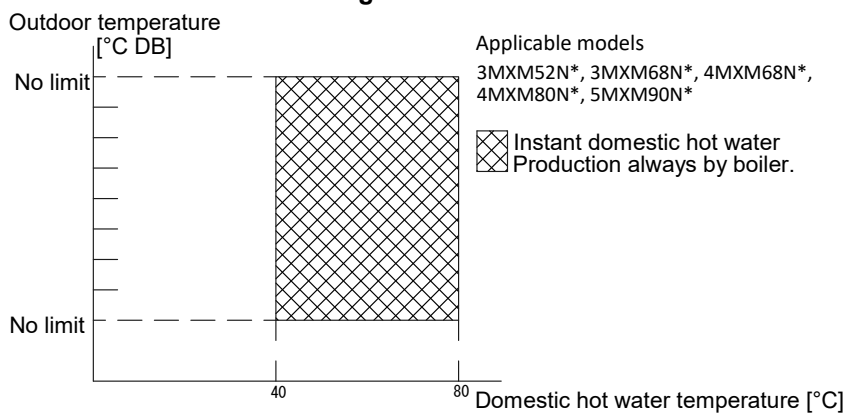


Notes

- When the heat pump is operating and the ambient temperature drops below ·-8·°C, then the heat pump will keep operating.
- The purpose of Hybrid for Multi in combination with Multi Outdoor unit is for Heating only (space heating and DHW (by boiler only)). The target use of the air conditioner indoor unit in such a system is for cooling only.

A combination of Hybrid and Air conditioner indoor unit, both in heating operation, is NOT the main objective of such a system.

Hence, the heating comfort or continuous operation of the air conditioner indoor unit cannot be guaranteed over the complete operation range.

3D109333



EEDEN20

08/2020



The present leaflet is drawn up by way of information only and does not constitute an offer binding upon Daikin Europe N.V. Daikin Europe N.V. has compiled the content of this leaflet to the best of its knowledge. No express or implied warranty is given for the completeness, accuracy, reliability or fitness for particular purpose of its content and the products and services presented therein. Specifications are subject to change without prior notice. Daikin Europe N.V. explicitly rejects any liability for any direct or indirect damage, in the broadest sense, arising from or related to the use and/or interpretation of this leaflet. All content is copyrighted by Daikin Europe N.V.