



ENERG
енергия · ενέργεια



NIBE

NIBE F2040-12



55 °C

35 °C



A++

A++



35 dB



57 dB

■ 13
■ 10
■ 12
kW

■ 12
■ 12
■ 12
kW



2015

811/2013



ENERG
енергия · ενέργεια




NIBE F2040-12 + VVM320




55°C



XL

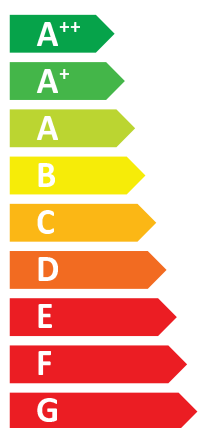

A++

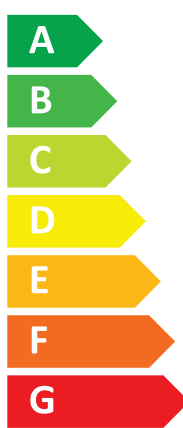

A



35 dB



57 dB



- 13 kW
- 10 kW
- 12 kW

2015

811/2013



ENERG

енергия · ενεργεια

Y

IJA

IE

IA

 **NIBE**

NIBE F2040-12 + VVM320



35 °C



A⁺⁺

A⁺⁺⁺

A⁺⁺⁺

A⁺⁺

A⁺

A

B

C


D

E

F

G

+



+



+



+





ENERG

енергия · ενεργεια

Y

IJA

IE

IA

NIBE

NIBE F2040-12 + VVM320



A⁺⁺



A



55 °C

A⁺⁺⁺

A⁺⁺

A⁺

A

B

C

D


E

F

G

A⁺⁺

+



+



+



+



XL

A⁺⁺⁺

A⁺⁺

A⁺

A

B

C

D

E

F

G

A

Supplier's name:	NIBE		
Model:	NIBE F2040-12+ VVM 320		
Temperature application	35	55	°C
Declared load profile for water heating	XL		
Seasonal space heating energy efficiency class, average climate:	A++	A++	
Water heating energy efficiency class, average climate:	A		
Rated heat output, average climate:	11,5	10,0	kW
Annual energy consumption for space heating, average climate	5382	6136	kWh
Annual electricity consumption for water heating, average climate	1702		kWh
Seasonal space heating energy efficiency, average climate:	174	132	%
Water heating energy efficiency, average climate:	98		%
Sound power level LWA indoors	35		dB
Rated heat output, cold climate:	11,5	13,0	kW
Rated heat output, warm climate:	12,0	12,0	kW
Annual energy consumption for space heating, cold climate	7798	11197	kWh
Annual electricity consumption for water heating, cold climate	1904		kWh
Annual energy consumption for space heating, warm climate	2759	3419	kWh
Annual electricity consumption for water heating, warm climate	1551		kWh
Seasonal space heating energy efficiency, cold climate:	142	111	%
Water heating energy efficiency, cold climate:	88		%
Seasonal space heating energy efficiency, warm climate:	229	185	%
Water heating energy efficiency, warm climate:	108		%
Sound power level LWA outdoors	57		dB

Data for package fiche

Controller class	VI		
Controller contribution to efficiency	4,0		%
Seasonal space heating energy efficiency of package, average climate:	178	136	%
Seasonal space heating energy efficiency class for package, average climate:	A+++	A++	%
Seasonal space heating energy efficiency of package, cold climate:	146	115	%
Seasonal space heating energy efficiency of package, warm climate:	233	189	%

Model(s):		NIBE F2040-12+ VVM 320							
Type of heat source/sink:		Air-to-water							
Low-temperature heat pump:		No							
Equipped with supplementary heater:		Yes							
Heat pump combination heater:		Yes							
Climate condition:		Average							
Temperature application:		Medium temperature (55 °C)							
Applied standards: EN14825 and EN16147									
Rated heat output		Prated	10,0	kW	Seasonal space heating energy efficiency		ηs	132	%
Declared capacity for part load at outdoor temperature Tj					Declared coefficient of performance for part load at outdoor temperature Tj				
Tj = -7 °C	Pdh	8,9	kW	Tj = -7 °C		COPd	1,99	kW	
Tj = +2 °C	Pdh	5,5	kW	Tj = +2 °C		COPd	3,22	kW	
Tj = +7 °C	Pdh	3,5	kW	Tj = +7 °C		COPd	4,61	kW	
Tj = +12 °C	Pdh	5,0	kW	Tj = +12 °C		COPd	6,25	kW	
Tj = biv	Pdh	9,2	kW	Tj = biv		COPd	1,90	kW	
Tj = TOL	Pdh	8,1	kW	Tj = TOL		COPd	1,92	kW	
Tj = -15 °C (if TOL < -20 °C)	Pdh		kW	Tj = -15 °C (if TOL < -20 °C)		COPd		kW	
Bivalent temperature	Tbiv	-7,9	°C	Operation limit temperature		TOL	-10	°C	
Cycling interval capacity for heating	Pcyc		kW	Cycling interval efficiency		COPcyc		-	
Degradation co-efficient	Cdh	0,98	-	Heating water operating limit		WTOL	58	°C	
Power consumption in modes other than active mode					Supplementary heater				
Off mode	P _{OFF}	0,002	kW	Rated heat output		P _{sup}	1,9	kW	
Thermostat-off mode	P _{TO}	0,014	kW						
Standby mode	P _{SB}	0,015	kW	Type of energy input		Electric			
Crankcase heater mode	P _{CK}	0,035	kW						
Other items									
Capacity control	variable			Rated air flow rate, outdoors			4380	m³/h	
Sound power level, indoors/outdoors	L _{WA}	35/57	dB	Rated water flow rate, indoor heat exchanger			0,86	m³/h	
Annual energy consumption	Q _{HE}	6136	kWh	Rated brine or water flow rate, outdoor heat exchanger				m³/h	
For heat pump combination heater:									
Declared load profile		XL		Water heating energy efficiency		η _{lwh}	98	%	
Daily electricity consumption	Q _{elec}	7,75	kWh	Daily fuel consumption		Q _{fuel}		kWh	
Annual electricity consumption	AEC	1702	kWh	Annual fuel consumption		AFC		GJ	
Approved by:									
Contact details		© NIBE Energy Systems - Box 14 - Hannabadsvägen 5 - 28521 Markaryd - Sweden							